


RXL15-1 / RXL16-1

120V/277V

| | | |
|--------------|--|------|
| Catalog #: | | Type |
| Project: | | Date |
| Prepared by: | | |

Die Cast Exit Sign - Single Face / Double Face

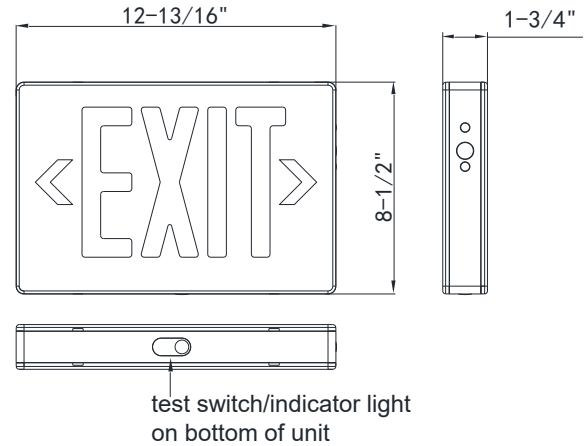

DESCRIPTION

Available in either single face or double face configurations and with red or green lettering, these attractive die cast aluminum emergency exit signs are a durable and attractive addition to any application. Able to be ceiling, end, or wall mounted there is a flexible design to meet your needs.

DESIGN FEATURES

Construction

- Die cast aluminum housing and faceplates
- Single or Double Face configurations
- Snap-out knockouts and chevron directional arrows

Electrical

- 120/277VAC - 60 Hz
- Operating temperature: 10°C (50°F) to 40°C (104°F)
- Battery and LED load short protection
- Test switch and battery charging indicator included
- Red Lettering - Maintenance-free Ni-cad 2.4V 300mAh Battery; 30mA Input Current; 2.2W Power Consumption
- Green Lettering - Maintenance-free Ni-cad 3.6V 300mAh Battery; 30mA Input Current; 2.3W Power Consumption
- 90 minutes of illumination in case of power failure

Mounting

- Universal J-Box mounting pattern on back plate
- RXL15-1: Wall, ceiling, or end mount capable
- RXL16-1: Ceiling or end mount capable

Dimensions (W x D X H)

- 12-13/16" x 1-3/4" x 8-1/2"

Certifications

- UL Listed for damp location
- Meets or exceeds all requirements for NFPA 70 and NFPA 101 life safety code
- CEC Title 20 Efficiency Compliant
- LED Lamps: 5 Year Limited Warranty
- Other components: 1 Year Limited Warranty

ORDERING GUIDE

Example: RXL15-1RBA

| Model # | Finish |
|---------|--|
| RXL15-1 | |
| RXL15-1 | RBA : Single Face Red Lettering with brushed aluminum housing GBA : Single Face Green Lettering with brushed aluminum housing |

ORDERING GUIDE

Example: RXL16-1GBA

| Model # | Finish |
|---------|--|
| RXL16-1 | |
| RXL16-1 | RBA : Double Face Red Lettering with brushed aluminum housing GBA : Double Face Green Lettering with brushed aluminum housing |



LED Lamps

Other components

LISTED

TEL: 800.937.6925 | Fax: 800.207.9509 | www.rplighting.com

Specifications and dimensions subject to change without notice.

1/28/21



RP LIGHTING · FANS