


RXL17 Series

120V/277V

Catalog #:		Type
Project:		Date
Prepared by:		

Sloped or Flat Ceiling Exit Sign - Single Face

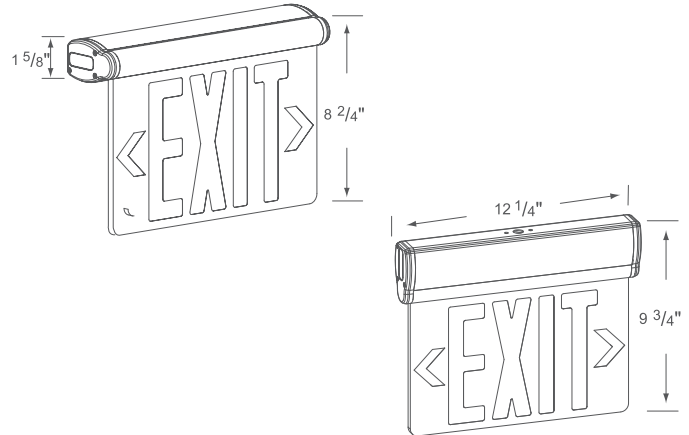

LED Emergency Exit

DESCRIPTION

When normal utility power fails, the internal solid-state transfer switch automatically connects the internal battery to the LED lamps, lighting a path of egress for no less than 90 minutes. When utility power is restored the battery is recharged by the on-board solid-state recharger. Full recharge is accomplished within 24 hours.

DESIGN FEATURES

Construction

- High impact- flame retardant thermoplastic faceplate
- Clear acrylic faceplate
- Die cast aluminum housing
- Compact, low profile design
- Completely Self-contained
- 90 minutes of illumination in case of power failure

Electrical

- 120/277V
- Operating temperature: 0°C (32°F) to 50°C (122°F)
- Contains 4.8V Ni-cd rechargeable battery
- 120/277V (replacement battery: RB-5)
- Fully automatic, low voltage disconnect protects battery from deep discharge
- Energy consumption of less than 5 watts
- Estimated 25 year LED lamp life.

Installation

- Wall or ceiling mountable
- Includes universal mounting canopy that pivots for slope ceiling use or surface end mounting
- Removable directional indicators included
- Easy, one-person installation

Dimensions (W x D x H)

- 12-1/4" x 1-5/8" x 9-3/4"

Finish

- RW Red with white housing, white end caps
- RBA Red with brushed aluminum housing, black end caps
- GW Green with white housing, white end caps
- GBA Green with brushed aluminum housing, black end caps

Certifications

- UL listed for damp location
- 5 year limited warranty

ORDERING

Example: RXL17-RW

Model #	Finish
RXL17	
RXL17	RW : Red w/white housing, white end caps RBA : Red w/brushed aluminum housing, black end caps GW : Green w/white housing, white end caps GBA : Green w/brushed aluminum housing, black end caps



TEL: 800.937.6925 | Fax: 800.207.9509 | www.rplighting.com

Specifications and dimensions subject to change without notice.

