


# RXL18 Series

120V/277V

|              |  |      |
|--------------|--|------|
| Catalog #:   |  | Type |
| Project:     |  | Date |
| Prepared by: |  |      |

## Sloped or Flat Ceiling Exit Sign - Double Face

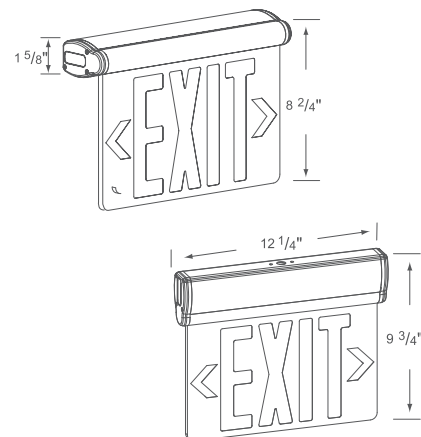

### DESCRIPTION

When normal utility power fails, the internal solid-state transfer switch automatically connects the internal battery to the LED lamps, lighting a path of egress for no less than 90 minutes. When utility power is restored the battery is recharged by the on-board solid-state recharger. Full recharge is accomplished within 24 hours.

### DESIGN FEATURES

#### Construction

- High impact-flame retardant thermoplastic faceplate
- Double mirrored finish faceplate
- Compact, low profile design
- Completely Self-contained

#### Electrical

- 120/277V
- Operating temperature: 0°C (32°F) to 50°C (122°F)
- Contains 4.8V Ni-cd rechargeable battery
- Automatic, low voltage disconnect protects battery from deep discharge
- Energy consumption of less than 5 watts
- Estimated 25 year LED lamp life
- 90 minutes of illumination in case of power failure

#### Installation

- Wall or ceiling mountable
- Includes universal mounting canopy that pivots for slope ceiling use
- Removable directional indicators included
- Easy, one-person installation

#### Dimensions (W x D X H)

- 12-1/4" x 1-5/8" x 8-2/4" or 9-3/4"

#### Finish

- RW Red with white housing, white end caps
- RBA Red with brushed aluminum housing, black end caps
- GW Green with white housing, white end caps
- GBA Green with brushed aluminum housing, black end caps

#### Certifications

- UL listed for damp location
- 5 year limited warranty

### ORDERING

Example: RXL18-RW

| Model # | Finish   |
|---------|--|
| RXL18   |  |
| RXL18   | <b>RW</b> : Red w/white housing, white end caps<br><b>RBA</b> : Red w/brushed aluminum housing, black end caps<br><b>GW</b> : Green w/white housing, white end caps<br><b>GBA</b> : Green w/brushed aluminum housing, black end caps |



TEL: 800.937.6925 | Fax: 800.207.9509 | [www.rplighting.com](http://www.rplighting.com)

Specifications and dimensions subject to change without notice.