

Series SBR

LED Recessed Flat Panel

The refreshing SBR Series offers luxurious lighting in a slim, austere design. Available in 1x4, 2x2 and 2x4 in multiple color temperatures and dimmable with 0 to 10 Volt dimming. The SBR is designed for T-Bar grid mounting and has a ballast box on top of the fixture. The panel has an unobtrusive white edge. These panels are an ideal choice for many applications including offices, circulation spaces, retail and now popular in residential kitchens remodeled to give a skylight appearance.

CONSTRUCTION

Housing is white aluminum that is sealed and Non-IC type fixture. Lens is evenly diffused frosted material. The driver is a Class 2 compliant design, featuring low voltage, limited power and is capable of 0-10V dimming as standard. Available in 40, 50 & 75 input watts. Fixture is 80CRI minimum, multiple color temperatures, sizes and wattages are available. 5 year limited system warranty. Listed by and bears ^cUL_{US} label.

TYPICAL OPTIONS & ACCESSORIES

Emergency battery backup, whips and frame kits.



DIMENSIONS

- 1x4- 47.50”L x 11.78”W x 4.688”H
- 2x2- 23.75”L x 23.75”W x 4.688”H
- 2x4- 47.688”L x 23.95”W x 4.688”H

FEATURES & BENEFITS

- Ultra thin LED panel light made from high-grade aluminum
- Custom finish colors available
- Rated at 50,000 hrs of L70 LED life
- CRI >80
- 0-10 Volt dimmable 120-277V
- High efficacy and UV and IR Free
- PF >0.99



ORDER INFORMATION

SERIES	DIFFUSER	WIDTH X LENGTH	GEAR	WATTAGE*1	DRIVER	FINISH ²	CCT			
SBR	FR Frosted	12X48	12"W x 48"L	LJ	D48	DMV 0-10V Dimming	WH	White	35K	3500K
		24X24	24"W x 24"L		D40		BK	Black	40K	4000K
		24X48	24"W x 48"L		D95		SL	Silver	50K	5000K


Note:

- Standard fascia finishes are White, Black, and Silver. Please consult factory for more information and pricing on custom color options.

*Programmable LED drivers allow custom configured wattages and corresponding lumens.

We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.

DRAWINGS & IMAGES

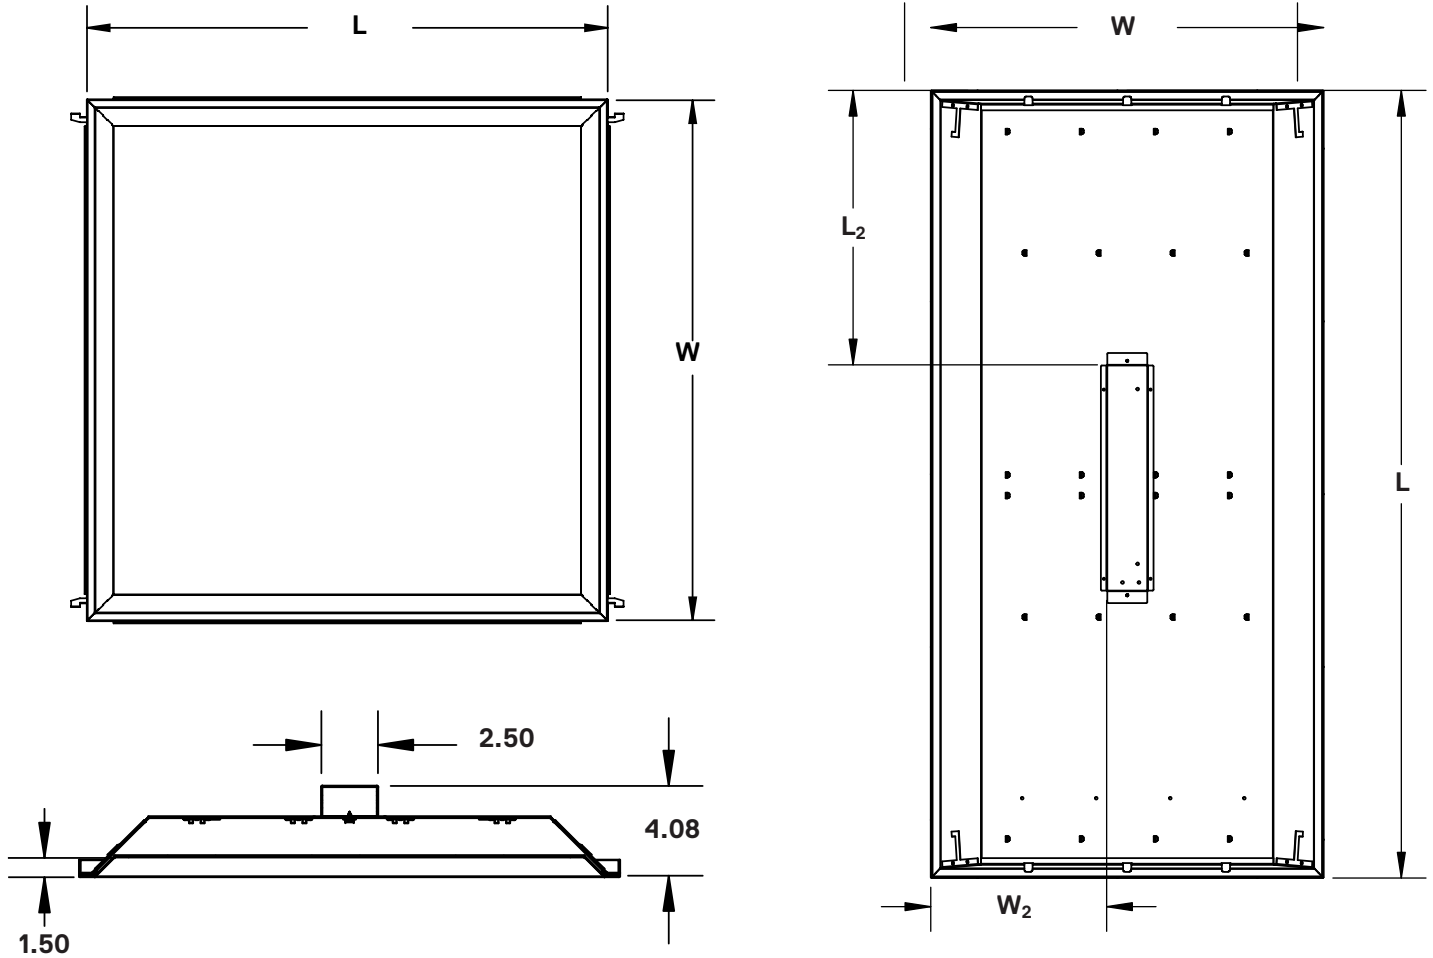

Fixture Size	W	L	W ₂	L ₂
12X48	11.78"	47.5"	4.7"	16.7"
24X24	23.75"	23.75"	10.7"	4.7"
24X48	23.75"	47.5"	10.7"	16.7"