SCX2 SERIES Commercial Lighting


SCX2-3FT-30W-MCT4-D-TR TRACK LIGHT



A member of the SCX family of Superior Linear Lights. A most comprehensive selection of linear lighting for all applications. Ideal for, retail locations, offices, lobbies, conference rooms, reception areas, hallways, educational facilities, hotels, and restaurants.



Customer Name:	
Project Name:	
Note:	Type:



35 3/4"(L) x 2"(W) x 3 3/8"(H)

Features

- LED Superior Architectural Lights
- Seamless Linkable Linear Lighting System
- Opal Polycarbonate Lens-Direct (DOWN) Lighting
- Optional Recessed & Wall Mounting Kits Available
- Optional Louver Version Lens Available
- Lens Type: Opal Polycarbonate Lens
- MCT: Multi Color Temperature (Selectable Switch Inside Fixture)

Technical Specifications

Electrical:

Voltage: 120-277VAC 50/60Hz

Wattage: 30WPower Factor: >0.95LWP: 94/ 105/ 99/ 100

Total Harmonic Distortion: ≤ 20 %

Mechanical:

- Low Profile Modern Design
- Aluminum Housing With Matte White Finish
- Custom Colors Available
- Lens Snaps into Housing
- Track is not included. Fits HALO™ & Compatible Systems
- Make Different Connections Via T/L/X Joints on Both Ends
- Mounting Options: Surface, Suspended, Wall, Recessed
- IP Rating: IP54
- Operating Temperature: -13°F~104°F

Lighting:

Selection:

- Dimmable: 0~10V Dimming
- Total Lumens: 2907M/3114LM/041LM/3133LM
 Color Temperatures: 3000K/3500K/4000K/5000K
- Multi-CCT(Selectable Switch Inside Fixture)
- Color Rendering Index: CRI ≥ 80
- Up Light Option Available
- 50.000 Hours Rated Life
- 5-Year Warranty
- Beam Angle: 104.8°(H) x 100.5°(V)

Applications:

 Ideal for, retail locations, offices, lobbies, conference rooms, reception areas, hallways, educational facilities, hotels, and restaurants.

Other Models:

• 20W | 2084LM | SCX2-2FT-20W-MCT4-D-TR • 40W | 4179LM | SCX2-4FT-40W-MCT4-D-TR • 60W | 6266LM | SCX2-6FT-60W-MCT4-D-TR • 80W | 8359LM | SCX2-8FT-80W-MCT4-D-TR













Photometrics: SCX2-3FT-30W-MCT4-D-TR



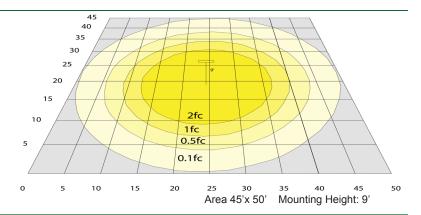

Other Views:







Performance Table: SCX2-3FT-30W-MCT4-D-TR

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
SCX2-3FT-30W-MCT4-D-TR	30W	120~277V	2907LM 3114LM 3041LM 3133LM	3000K 3500K 4000K 5000K	B2-U2-G1	94 105 99 100

Sample Ordering

Model	Size	Wattage	Color Temp. Feature	Track
SCX2 -	3FT -	30W -	MCT4 - D -	TR

Accessories:

Blank = No Option For Accessories

SCL-6FT-SJTW18/5 = 6ft White Cord, SJTW 18 AWG 5-Conductor (Black, White, Green + Purple & Gray for 0-10V Dimming)

SCL-6FT-SJTW18/5-100FT = 100ft Roll of White Cord, SJTW 18 AWG 5-Conductor (Black, White, Green + Purple & Gray for 0-10V Dimming)

SCL-6FT-SJTW18/5-100FT-BK = 100ft Roll of Black Cord, SJTW 18 AWG 5-Conductor (Black, White, Green + Purple & Gray for 0-10V Dimming)

SCL-6FT-SJTW18/6-100FT = 100ft Roll of Black Cord, SJTW 18 AWG 6-Conductor (Black, White, Green + Purple & Gray for 0-10V Dimming + Red for Backup Invertor)

SCL-ASC-500FT = 1/16" 500 ft. Steel Aircraft Cable Suspension

Factory-Installed Options:

Blank = No Option For Accessories

OPT-HBC-125BS-WH = 10FT, 15A, 125V, 18/3 STR, WHT

SUSPENDED MOUNTING ACCESSORIES (NOT INCLUDED)







SCL-6FT-SJTW18/5-100FT SCL-6FT-SJTW18/6-100FT

SCL-6FT-SJTW18/5-100FT-BK

SCL-ASC-500F



SCL-6FT-SJTW18/5

FACTORY-INSTALLED OPTIONS:



OPT-HBC-125BS-WH



FACTORY-INSTALLED OPTIONS:

LIGHTS SCX FLEXIBLE LENS ROLL 25FT OR 100FT

٠.	LIGITIO OOX I ELXIDEE I		<u> </u>	
	Model	SIZE	DESCRIPTION	
	SCX2-FLEXLENS-25FT	25FT	Flex lenses can be cut to different lengths, enabling precise customization according to the	
	SCX2-FLEXLENS-100FT	100FT	installation area. This allows for a seamless fit, reducing gaps or visible transitions between different sections of the SCX lights	1.

COLOR OF YOUR CHOICE

Model	DESCRIPTION	
OPT-SCX-CLR-3FT	Add this option and specify your desired color on your purchase order or provide a swatch to match. For painted flanged fixture or optional rod, mounting set please also add the relevant option below for each fixture.	
OPT-SCX-CLR-FRM	This is a painted flanges option.	
OPT-SCX-CLR-RODSET	This is a painted rod set option.	

INDIRECT (UP) LIGHTING

	IBINEET (OF) EIGHTHING					
	Model	WATTS	LUMENS	COLOR TEMP	SIZE	
0	PT-SCX-ULM-3FT-12W-MCT4	12W	1200LM 1236LM 1260LM 1296LM	3000K 3500K 4000K 5000K	3FT	
	OPT-SCX-ULM-BU	Indirect ((up) light w	ith blue color		
	OPT-SCX-ULM-GR	Indirect ((up) light w	ith green color		

EMERGENCY BATTERY BACKUP

Model	DESCRIPTION	
OPT-EM-CM1INT	This is an option for a 90-minute backup battery installation. If you need to order this series for the fixture, please have your purchase order ready and call us or specify on the order which fixture to install this option and the test button.	9

BI-LEVEL MOTION SENSOR

Model	DESCRIPTION	
OPT-SEN-SCX2	This option installs an advanced motion sensor that will turn the lights on when the area is occupied. When the area is cleared, after a preset hold time of 5 sec or more the lights are dimmed to a standby level of 30% or more. If still no motion is detected, after the standby period, the light is turned off. All setting is programmable with a remote control.	
OPT-WEC-3RC	This is an optional remote control for sensor.	





DEDICATED WIRING FOR UPLIGHT CONTROL

Model		DESC	RIPTION		
	Installing Compatible Independ A Driver Supplied Brightnes	A Separate le Driver For ent Control A Regulates T To The Uplig s And Color	or Uplight Contrest Electrical Circuit Uplighting. This En And Power Manage the Voltage And Control, Often The Control, Often The Electrical Control C	t And nsures ment. urrent recise	
OPT-SCX-ULC-3FT-MCT4	WATTS	LUMENS	COLOR TEMP	SIZE	
	12W	1200LM 1236LM 1260LM 1296LM	3000K 3500K 4000K 5000K	3FT	





COLOR CHART: * Choose from one of our Premium Colors with no set-up fee.

Gloss:



SILVER METALLIC 70 GLOSS T357-GR105



SILVER METALLIC 30 GLOSS T353-GR06



DARK RED 90 **GLOSS** P009-RD02



INTERNATIONAL **ORANGE 90** GLOSS T009-OG26



SAFETY ORANGE 90 GLOSS T009-OG01



YELLOW 90 GLOSS T009-YL14



YELLOW 90 GLOSS T009-YL01



TRAFFIC GREEN 70 GLOSS T007-GN16



GREEN 70 GLOSS T007-GN13



GREEN 60 GLOSS C006-GN03



BLUE 90 GLOSS T009-BL01



DARK BLUE 80 GLOSS T008-BL20



RAL 8028 TERRA **BROWN 90 GLOSS** C209-BR358

Hammer:



WHITE HAMMER T013-WH09



BEIGE HAMMER T013-BG38



GREY HAMMER C013-GR08



SILVER HAMMERTONE T064-GR05



BLACK HAMMER T013-BK62



RED HAMMER T013-RD15



GREEN HAMMER T013-GN220



BLUE HAMMER T013-BL468



BRONZE HAMMER



T012-BR161

Texture:



WHITE TEXTURE C031-WH120



FLINT GRAY **TEXTURE** T243-GR522



BLACK TEXTURE C241-BK109



RED TEXTURE T241-RD129



BLUE TEXTURE C241-BL544



OIL RUBBED **BRONZE TEXTURE** T291-BR251

Vein:



BLACK/WHITE VEIN T075-WH34



SILVER VEIN T375-BK26



COPPER VEIN **EXTERIOR** T075-BK211



GOLD VEIN T375-BK10



COPPER VEIN T375-BK07



Phone: (877) 805-2252 | Fax: (877) 805-2252 www.westgatemfg.com

5