

SCX4 SERIES Commercial Lighting

SCX4-IP66-SUS-8FT-80-160W-MCTP

POWER & CCT- ADJUSTABLE LINEAR LIGHT, Suspended

MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)


WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____


Project Name: _____

Note: _____

Type: _____

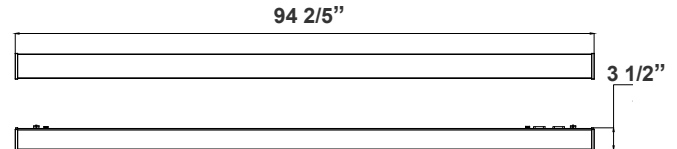

The SCX series offers the best and the most comprehensive selection for linear lighting. The unique and modern look providing a impressive illumination for the occupants. Ideal for, retail locations, offices, lobbies, conference rooms, reception areas, hallways, educational facilities, hotels, and restaurants. FEATURES: Superior Architectural Look Energy-efficient: Low Wattage Consumption & High Lumen Output Easier Wire Management, Multi Color Temperature (Selectable Switch on the Fixture)



4 1/5"(D) x 94 2/5"(W) x 3 1/2"(H)

Features

- LED Superior Architectural Lights
- Opal Polycarbonate Lens-Direct (DOWN) Lighting
- Lens Type: Opal Polycarbonate Lens

Technical Specifications

Electrical:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 80W/120W/160W
- Power Factor: >0.95
- LPW: 105
- Total Harmonic Distortion: ≤ 19 %

Mechanical:

- Power Cord is Not Included. Select From The Following Range:
 - SCX4-IP66-ACPT-6FT = SCX4-IP66 6Ft AC Pigtail With Female Wet Loc. Connector
 - SCX4-IP66-ACPT-10FT = SCX4-IP66 10Ft AC Pigtail With Female Wet Loc. Connector
 - SCX4-IP66-JUMP-6IN = SCX4-IP66 6In Ac Jump Cable With Male And Female Wet Loc. Connector
 - SCX4-IP66-JUMP-12IN = SCX4-IP66 12In Ac Jump Cable With Male And Female Wet Loc. Connector
- Wall Mounting Kit Included
- Suspended With Optional Stainless Steel Down Rod Kits or Heavy-Duty Aircraft Cables
- Waterproof Male & Female Connectors Pre-Installed On The Top Near The Two Ends
- Low Profile Modern Design
- Aluminum Housing With Sandy White Finish
- Mounting Options: Suspended, Wall
- IP Rating: IP66 Wet Location Only
- Operating Temperature: -22°F to +104°F
- 5-Year Warranty

Lighting:

- MCT: Multi Color Temperature and Power (Selectable Switch Fixture)
- Dimmable: 0~10V Dimming
- Total Lumens: 16800LM Max.
- Color Temperatures: 3500K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- 50,000 Hours Rated Life
- Beam Angle: 105°(H) x 103.7°(V)

Applications:

- Ideal for offices, hotels, corridors, saloons, libraries, meeting rooms, conference halls, and the best solution for modern lighting solutions





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgateimg.com |




WG-01172023

Photometrics: SCX4-IP66-SUS-8FT-80-160W-MCTP

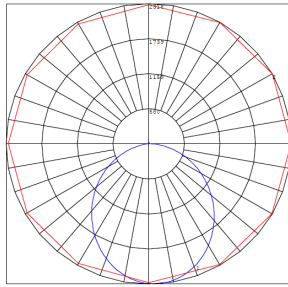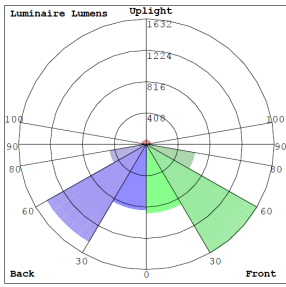

BUD Rating: B2-U3-G1

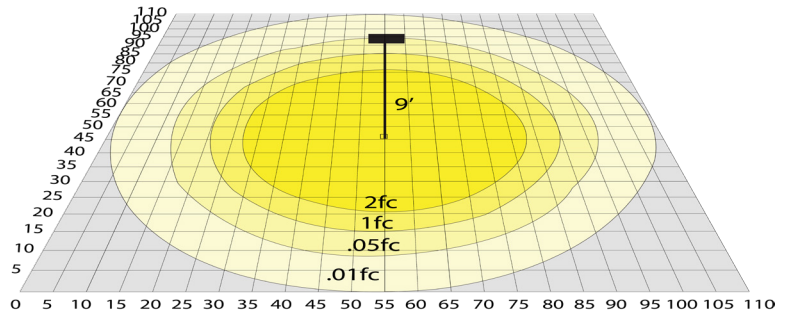


80W, 4000K Area 55'x 110' Mounting Height: 9'

Other Views:



Side View

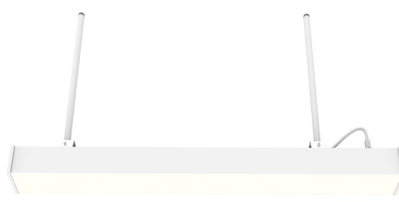

Front View




Back View




Coupling Connection


Wall Mounted

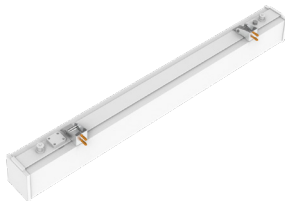

Side View



Front View

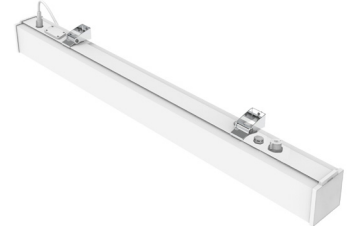

Back View

Performance Table: SCX4-IP66-SUS-8FT-80-160W-MCTP

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
SCX4-IP66-SUS-8FT-80-160W-MCTP	80W 120W 160W	120~277V	8400LM 12600LM 16800LM	3500K 4000K 5000K	B2-U3-G1	105



Sample Ordering

Model IP Rating Type Size Wattage Color Temp

SCX4 - IP66 - SUS - 8FT - 80 - 160W - MCTP

Accessories:

Blank = No Option For Accessories

SCL-GS10 = ADJ. 10FT 1/16IN DOUBLE SUSPENSION CABLE WITH SINGLE KEYHOLE CONN., LOOP GRIPPER ON TOP

SCL-GS20 = ADJ. 20FT 1/16IN DOUBLE SUSPENSION CABLE WITH SINGLE KEYHOLE CONN., LOOP GRIPPER ON TOP

SCL-6FT-SJTW18/5 = 6ft White Cord, SJTW 18 AWG 5-Conductor (Black, White, Green + Purple & Gray for 0-10V Dimming)

SCL-6FT-SJTW18/5-100FT = 100ft Roll of White Cord, SJTW 18 AWG 5-Conductor (Black, White, Green + Purple & Gray for 0-10V Dimming)

SCL-6FT-SJTW18/5-100FT-BK = 100ft Roll of Black Cord, SJTW 18 AWG 5-Conductor (Black, White, Green + Purple & Gray for 0-10V Dimming)

SCL-6FT-SJTW18/6-100FT = 100ft Roll of Black Cord, SJTW 18 AWG 6-Conductor (Black, White, Green + Purple & Gray for 0-10V Dimming + Red for Backup Inverter)

SCL-AH = Heavy-Duty Auxiliary Hook for Up To 1/16" Aircraft Cable

SCL-ASC-500FT = 1/16" 500 ft. Steel Aircraft Cable Suspension

SCX4-IP66-ACPT-6FT = SCX4-IP66 6Ft Ac Pigtail With Female Wet Loc. Connector

SCX4-IP66-ACPT-10FT = SCX4-IP66 10Ft Ac Pigtail With Female Wet Loc. Connector

SCX4-IP66-JUMP-6IN = SCX4-IP66 6In Ac Jump Cable With Male And Female Wet Loc. Connector

SCX4-IP66-JUMP-12IN = SCX4-IP66 12In Ac Jump Cable With Male And Female Wet Loc. Connector

SCX4-IP66-CB = SCX4-IP66 Coupling Bracket

SCX4-IP66-RODKIT-18IN = SCX4-IP66 18In Suspension Rod Kit

SCX4-IP66-RODKIT-24IN = SCX4-IP66 24In Suspension Rod Kit

SUSPENDED MOUNTING ACCESSORIES (NOT INCLUDED)



SCL-GS10 SCL-GS20



SCL-6FT-SJTW18/5-100FT SCL-6FT-SJTW18/5-100FT-BK SCL-ASC-500FT
SCL-6FT-SJTW18/6-100FT



SCL-AH SCL-ASC-500FT SCL-6FT-SJTW18/5 SCX4-IP66-ACPT-6FT
SCX4-IP66-ACPT-10FT



SCX4-IP66-CB SCX4-IP66-JUMP-6IN
SCX4-IP66-JUMP-12IN SCX4-IP66-RODKIT-18IN




SCX4-IP66-RODKIT-24IN

Other Model: SCX4-IP66-SUR-4FT-40-80W-MCTP



Side View

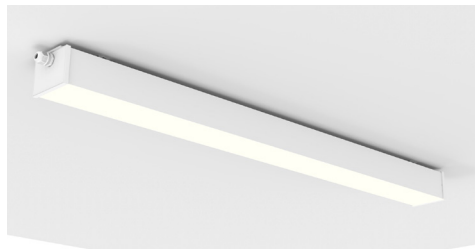

Bottom View



Back View

