

Vertical Freezer Lighting PEAK



Vertical Freezer Lighting PEAK



Vertical Freezer Lighting


PEAK



- Bright and consistent illuminance for vending machine
- Less heat radiation, more energy saving
- Lifetime: 50,000hrs (ta=95°F, 35°C)
- IP rating: IP65 (for damp locations)
- Ta: -13°F~95°F (-25°C~35°C)
- Material: PC




Dimensions: (inches/mm)

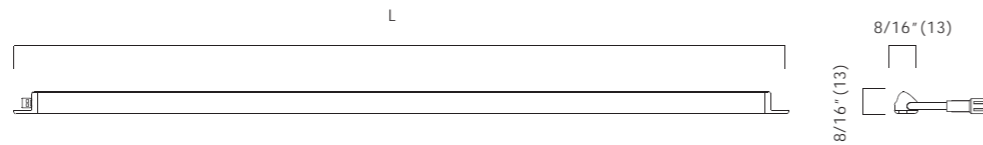


Wiring Diagram



Specialized Candlepower Distribution

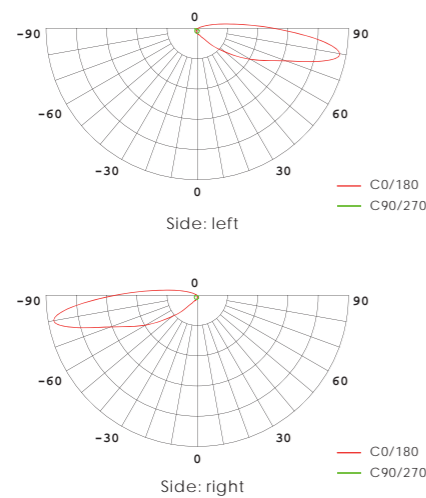

Spacing Distribution of Illuminance(unit:fc)

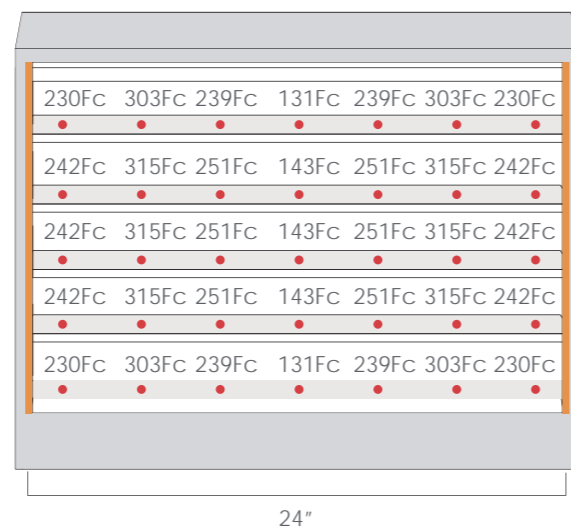

Vertical Freezer Lighting

PEAK

How to order using our catalog numbers:

Example: PEAK-L2365KWS18

Series	Side	Length	Color Temp	Finish	Installation	Cable Length
PEAK	L-Left R-Right	23 - 22.4" (570mm) 47 - 46.5" (1180mm)	65-6500K	W - White B - Black	S-Screw Mounting	18 - 18" (457mm)

Catalog No.	Model	Description					Max. Pcs Per LED Power Supply
		Rated Input	Ra	Wattage	Luminous Flux (TYP@4000K)	Included	
PEAK-L2365KWS18	PEAK-L28-24V	24VDC	85	5.6W	560lm	1 pc LED fixture 2pcs Screws	30W (NA159-3024FA-4A6) 2pcs Left + 2pcs Right
PEAK-R2365KWS18	PEAK-L28-24V-1						
PEAK-L2365KBS18	PEAK-L28-24V						
PEAK-R2365KBS18	PEAK-L28-24V-1						
PEAK-L4765KWS18	PEAK-L56-24V	24VDC	85	11.2W	1120lm	1 pc LED fixture 2pcs Screws	1pc Left + 1pc Right
PEAK-R4765KWS18	PEAK-L56-24V-1						
PEAK-L4765KBS18	PEAK-L56-24V						
PEAK-R4765KBS18	PEAK-L56-24V-1						

How to choose your driver & cables:

Catalog No.	Description	Photo
IC-PK-59	Input cable 59" (must be between light and splitter)	
NA159-3024FA-4A6	Model: SLT30-24VF-A Matching driver, max. 30W. Input: 100-120VAC NA plug 1 + 59" cable. Output: 24VDC 6-way splitter JB-4A + 6" cable.	

*Note: For alternative driver configurations, please contact our sales department.

Installation

