



JOB NAME:


CAT#:

TYPE:

APPLICATIONS

The SKY Series offers the look and feel of a fluorescent luminaire - subtle soft direct elements, interest and depth across the ceiling plane - with a contemporary look that blends with today's commercial spaces. Suitable for offices, hospitals, schools, etc. Suitable for use in standard 15/16" inverted T-bar grid ceilings.


Low profile troffer body housing with white enamel finish. High reflectance optical engine. Linear ribbed acrylic lens with Lumieo®. Recessed troffer fixture body assembly in 2'x2' and 2'x4' size.

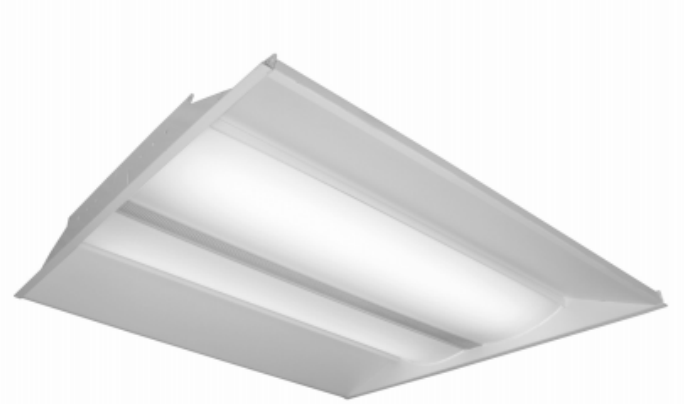

FEATURES & BENEFITS

- High performance optical engine delivers main beam focus through the integrated acrylic lens
- Linear ribbed acrylic lens with Lumieo® overlay manages the balance of efficiency and aesthetics
- Linear arrayed LED modules provide diffused and effective illumination
- IC Rated
- cETL_{US} listed for damp locations up to 67 watts

DIMENSIONS

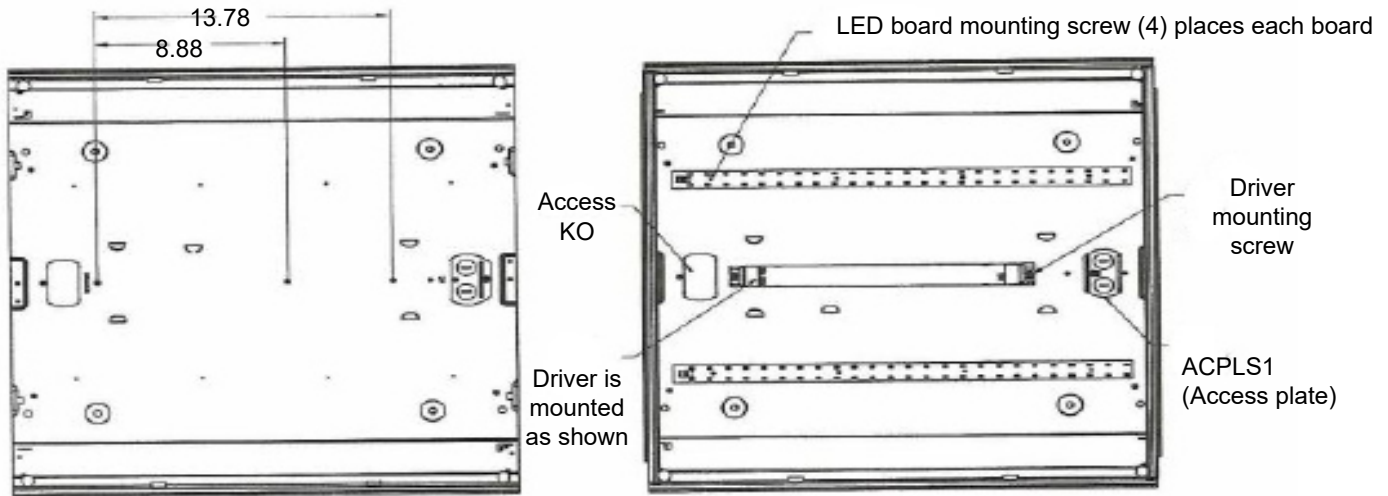

Dimensions and specifications subject to change without notice.








JOB NAME:

CAT#:

TYPE:

DIMENSIONS

Cross Section

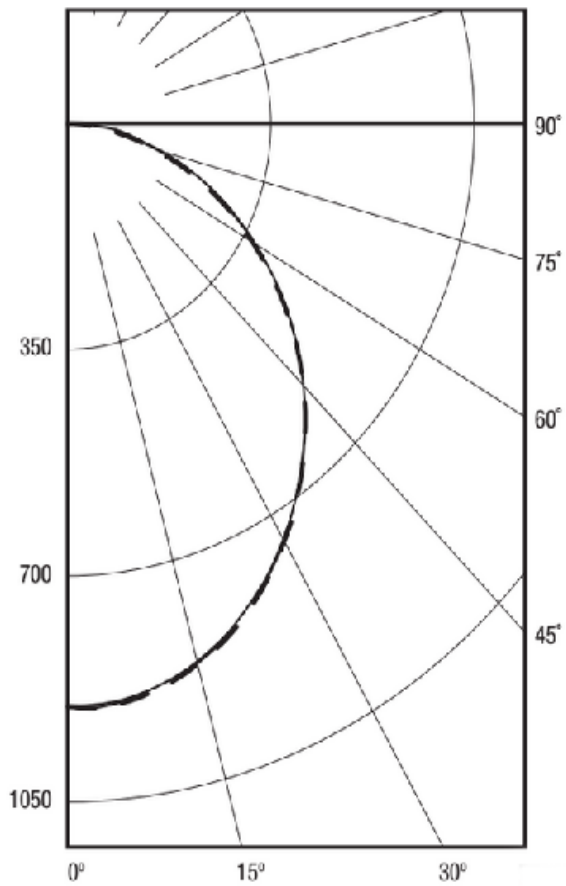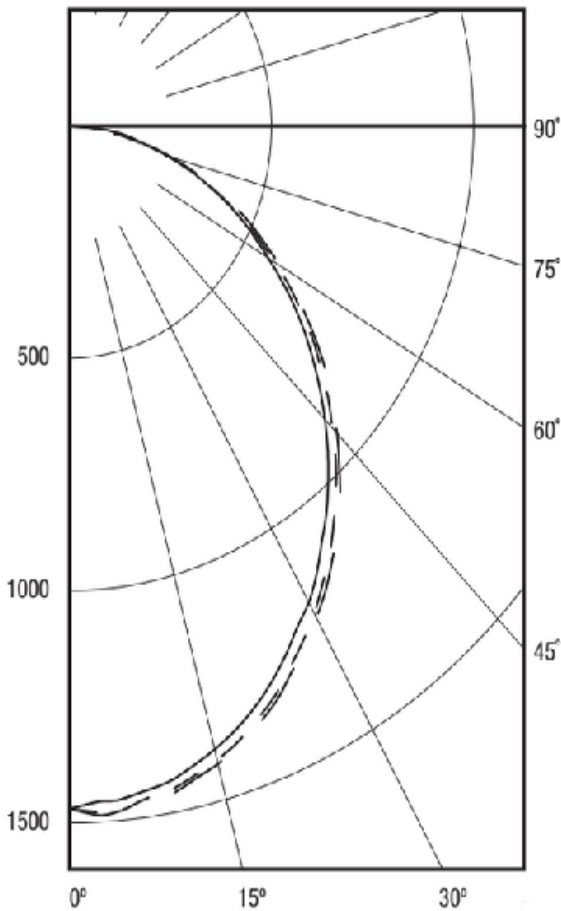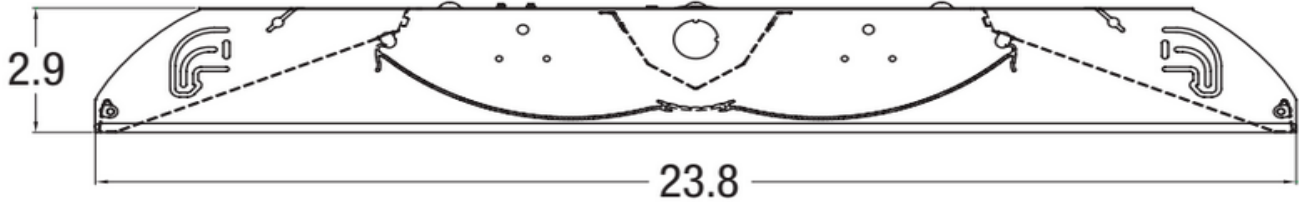

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: SKY 22 LED 20 DMV 30 EM

SKY		LED							
1. SERIES	2. SIZE	3. GEAR	4. WATTAGE/LUMENS		5. DRIVER		6. COLOR TEMP		7. EMERGENCY (O) ¹
SKY	22 2x2 24 2x4	LED	2x2		DMV	120-277V Multivolt 0-10V Dimmable	30 3000K 35 3500K 40 4000K 50 5000K	EM Battery Backup 10W 1200 Lumens*	EM5 Battery Backup 5W 600 Lumens*
			20	20 Watts 2455 Lumens					
	24		24 Watts 3035 Lumens						
	28		28 Watts 3510 Lumens						
	32		32 Watts 3935 Lumens						
	36		36 Watts 4190 Lumens						
	45		45 Watts 4990 Lumens	D347V	347VAC 0-10V Dimming	*Estimated Lumens			
	2x4								
	28		28 Watts 3600 Lumens						
	31		31 Watts 4055 Lumens						
	35		35 Watts 4560 Lumens						
	40		40 Watts 5200 Lumens						
	45		45 Watts 5825 Lumens						
	50		50 Watts 6455 Lumens						
55	55 Watts 6975 Lumens								
60	60 Watts 7355 Lumens	D120	Triac Dimming 120VAC						
		D277	Triac Dimming 277VAC						

DLC INFORMATION

DLC Listed Models	
SKY22-LED20DMVxx	xx = Color Temp 30,35,40,50
SKY22-LED24DMVxx	xx = Color Temp 30,35,40,50
SKY22-LED28DMVxx	xx = Color Temp 30,35,40,50
SKY22-LED32DMVxx	xx = Color Temp 30,35,40,50
SKY22-LED36DMVxx	xx = Color Temp 30,35,40,50
SKY24-LED28DMVxx (EM)	xx = Color Temp 30,35,40,50
SKY24-LED35DMVxx (EM)	xx = Color Temp 30,35,40,50
SKY24-LED40DMVxx (EM)	xx = Color Temp 30,35,40,50
SKY24-LED45DMVxx (EM)	xx = Color Temp 30,35,40,50
SKY24-LED50DMVxx (EM)	xx = Color Temp 30,35,40,50
SKY24-LED55DMVxx (EM)	xx = Color Temp 30,35,40,50
Sky24-LED60DMVxx (EM)	xx = Color Temp 30,35,40,50



Notes:

¹(O) is optional

Dimensions and specifications subject to change without notice.

