


## WIRING DIAGRAM:

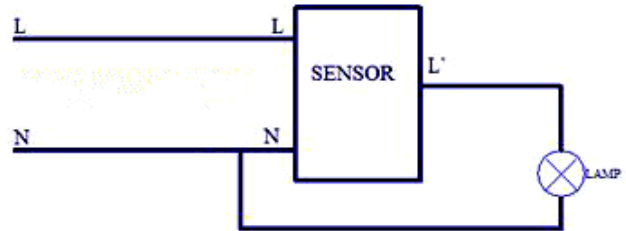

L: BLACK

N: WHITE

L': RED



## SL-HPIR-BZ SL-HPIR-WH

### OUTDOOR MOTION SENSORS

Ideal for Walkways, parking lots, dock lighting, warehouses, garages, backyards, entrance ways, motel.

#### ELECTRICAL SPECIFICATIONS:

- Max Load: 500W
- Voltage: 120VAC 50/60Hz
- Ambient Light: Night detect/Day detect: 5-50lux/35-400lux

#### HOUSING SPECIFICATIONS:

- Polycarbonate construction
- 1/2 NPT threads fit into 1/2" weatherproof box outlets
- Installation Height: 3.2-13ft.
- Operating temperature: 14°F ~ 104°F
- Outdoor Motion Sensor (White & Bronze)
- Wet location listed

#### CERTIFICATIONS:



#### TECHNICAL SPECIFICATIONS:

- Detection Range: 240°
- Detection Distance: 30~68ft. (adjustable)
- Time Setting: 1,5,20min±30%
- Dusk Time: off/3hr/6hr/dusk to dawn
- Detection Motion Speed: 2-4.9ft./s
- Operating Model: Test/Auto/Override

**WARRANTY:** 1 years

MODEL	MAX LOAD	VOLTAGE	DETECTION RANGE
SL-HPIR-BZ	500W	120VAC	240°
SL-HPIR-WH	500W	120VAC	240°

