

1130 1132

Ceiling Fixture



Features

Housing

Die-formed Cold-rolled Steel
 Finish Option: -06 White, -30 Oil Rubbed Bronze, -62 Satin Nickel

Optical

Alabaster Glass Shade or Acrylic Shade

Electrical

High Power Factor, Low THD

Lamp


LED: High Efficiency, High CRI, Binned and Mixed to Reach Uniform Light
 LED Type: Built-in (Color Temperature Option – 3000K, 3500K, 4000K, 5000K)
 MCT(Adjustable Multiple Color Temperature, 3000K/3500K/4000K)
 CFL Type: GU24 CFL Bulb (Color Temperature Option – 2700K, 4000K)

Certification

UL/cUL or ETL/cETL Listed, Suitable for Damp Locations

Warranty

5 Years Warranty on Driver and LED Module

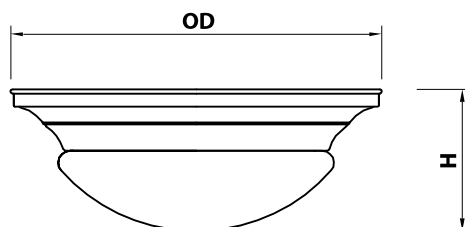

LED Type

Model	Input Voltage	Input Wattage	Lumen (TYP) / CT	CT	Finish	Shade	Dimension (OD x H)	Energy Star
1130D-62-xxxxK	120V-277V	17W	1280	3000K	Satin Nickel	Alabaster Glass	12.0" x 4.6"	Yes
1130D-62-MCT	120V-277V	18W	1280	3000K/3500K/4000K	Satin Nickel	Alabaster Glass	12.0" x 4.6"	---
1132D-62-xxxxK	120V-277V	17W	1600	3000K	Satin Nickel	Acrylic	14.5" x 5.4"	Yes
1132D-62-MCT	120V-277V	18W	1600	3000K/3500K/4000K	Satin Nickel	Acrylic	14.5" x 5.4"	---

CFL Type

Model	Input Voltage	Input Wattage	Lamp	Finish	Shade	Dimension (OD x H)	Energy Star
1130PG-213-62	120V	26W	2 x 13W GU24	Satin Nickel	Alabaster Glass	12.0" x 4.6"	---
1132PG-218-62	120V	36W	2 x 18W GU24	Satin Nickel	Alabaster Glass	14.5" x 5.4"	---