

DC312 DC314 DC316 DC318

Ceiling Fixture & Pendant



Features

Housing

Die-formed Cold-rolled Steel
Side Shade: Semi-clear White Decorative Fibre Linen

Optical

Shade: High Transmission Acrylic Front Panel Create Excellent Light Distribution and Uniformity
LED: High Efficiency, High CRI, Binned and Mixed to Reach Uniform Light.

Electrical

High Power Factor, Low THD

Lamp


LED Type: Built-in (Color Temperature Option – 3000K, 3500K, 4000K, 5000K)
CFL Type: GU24 CFL Bulb (Color Temperature Option – 2700K, 4000K)
Available on Multiple Color Temperature (MCT) – All in One (3000K, 3500K or 4000K)

Certification

UL/cUL, ETL/cETL Listed

Warranty

5 Years Warranty on LED Driver and LED Module

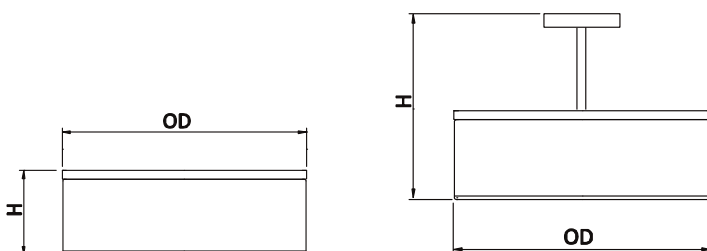

LED Type

Model	Input Voltage	Input wattage	LED CT / CRI	Lumen (TYP)	Dimension (OD X H)	Energy Star
DC312D-xxxxK	120V ~ 277V	18W	3000K / >80	1200	11.7" x 5.0"	Yes
DC314D-xxxxK	120V ~ 277V	24W	3000K / >80	1850	14.5" x 5.0"	Yes
DC318D-xxxxK	120V ~ 277V	35W	3000K / >80	3000	17.7" x 5.0"	Yes
DC312D-MCT	120V ~ 277V	18W	3000K / >80	1200	11.7" x 5.0"	Yes
DC314D-MCT	120V ~ 277V	24W	3000K / >80	1850	14.5" x 5.0"	Yes
DC316D-MCT	120V ~ 277V	28W	3000K / >80	2300	16.0" x 5.0"	Yes
DC318D-MCT	120V ~ 277V	35W	3000K / >80	3000	17.7" x 5.0"	Yes
DC312D-PD-xxxxK	120V ~ 277V	18W	3000K / >80	1200	11.7" x 12.0"	Yes
DC314D-PD-xxxxK	120V ~ 277V	24W	3000K / >80	1850	14.5" x 12.0"	Yes
DC318D-PD-xxxxK	120V ~ 277V	35W	3000K / >80	3000	17.7" x 12.0"	Yes

CFL Type

Model	Input Voltage	Input Wattage	Shade	Lamp	Dimension (OD x H)
DC312PG-123	120V	23W	Acrylic / Linen	1 x 23W GU24	11.7" x 5.0"
DC314PG-218	120V	36W	Acrylic / Linen	2 x 18W GU24	14.5" x 5.0"
DC318PG-318	120V	54W	Acrylic / Linen	3 x 18W GU24	17.7" x 5.0"
DC314PG-PD-218	120V	36W	Acrylic / Linen	2 x 18W GU24	14.5" x 12.0"
DC318PG-PD-318	120V	54W	Acrylic / Linen	3 x 18W GU24	17.7" x 12.0"