

DC714D_DC718D

Ceiling Fixture & Pendant



Features

Housing

Die-formed Cold-rolled Steel
 Finish Option: -62 Satin Nickel, -30 Oil Rubbed Bronze, -05 Black
 Low Profile Design

Optical

Shade: High Transmission Acrylic Create Excellent Light Distribution and Uniformity
 LED: High Efficiency, High CRI, Binned and Mixed to Reach Uniform Light

Electrical

High Power Factor, Low THD

Lamp


Built-in LED Module
 MCT Type : Multiple Color Temperature (3000K or 3500K or 4000K)
 Dimmable with LED Triac Dimmer

Certifications

ETL/cETL Listed, Energy Star Listed

Warranty

5 Years Warranty on Driver and LED Module

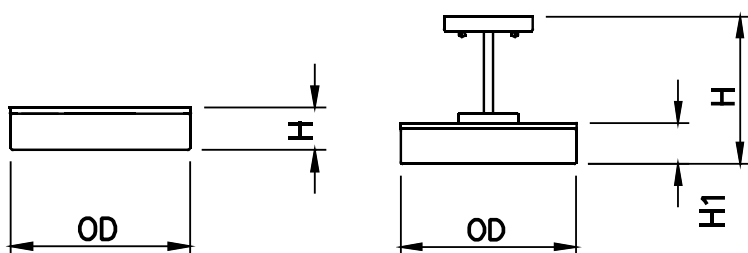

LED Type

Model	Input Voltage	Input Wattage	CRI	Lumen (Typ)	LED CT	Finish	Shade	Dimension (OD X H)	Energy Star
DC714D-62-MCT	120V	25W	> 80	1200	3000K or 3500K or 4000k	Satin Nickel	Acrylic / Linen	14.5" x 3.0"	Yes
DC718D-62-MCT	120V	32W	> 80	1700	3000K or 3500K or 4000K	Satin Nickel	Acrylic / Linen	17.7" x 3.0"	Yes

Pendant LED Type

Model	Input Voltage	Input Wattage	CRI	Lumen (Typ)	LED CT	Finish	Shade	Dimension (OD X H)
DC714D-PD-62-MCT	120V	25W	> 80	1200	3000K or 3500K or 4000K	Satin Nickel	Acrylic / Linen	14.5" x 10.0"
DC718D-PD-62-MCT	120V	32W	> 80	1700	3000K or 3500K or 4000K	Satin Nickel	Acrylic / Linen	17.7" x 10.0"