

DC814-A DC818-A

Ceiling Fixture & Pendant



Features

Housing

Die-formed Cold-rolled Steel
 Inner Shade: Semi-clear White Decorative Fibre Linen
 Outer Shade: Semi-clear Silver Decorative Fibre Linen

Optical

Shade: High Transmission Acrylic Front Panel Create Excellent Light Distribution and Uniformity
 LED: High Efficiency, High CRI, Binned and Mixed to Reach Uniform Light.

Lamp


LED Type: Built-in (Color Temperature Option – 3000K, 3500K, 4000K, 5000K)
 CFL Type: GU24 CFL Bulb (Color Temperature Option – 2700K, 4000K)

Certification

UL/cUL or ETL/cETL Listed

Warranty

5 Years Warranty on Driver and LED Module

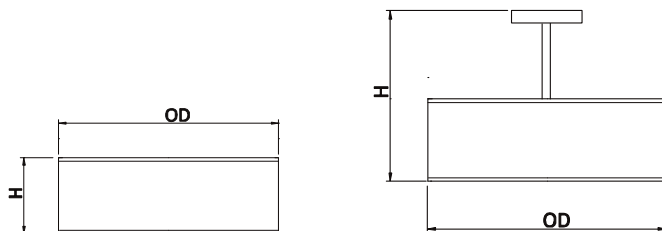

LED Type

Model	Input Voltage	Input Wattage	LED CT / CRI	Lumen (TYP)	Dimension (OD X H)	Shade
DC814D-A-xxxxK	120V ~ 277V	24W	3000K / >80	1700	17.5" x 5.5"	Acrylic / Linen
DC818D-A-xxxxK	120V ~ 277V	35W	3000K / >80	2480	20.8" x 6.1"	Acrylic / Linen
DC814D-A-PD-xxxxK	120V ~ 277V	24W	3000K / >80	1700	17.5" x 12.5"	Acrylic / Linen
DC818D-A-PD-xxxxK	120V ~ 277V	35W	3000K / >80	2480	20.8" x 13.1"	Acrylic / Linen

CFL Type

Model	Input Voltage	Finish	Shade	Lamp	Dimension (OD x H)
DC814PG-A-218	120V	36W	Acrylic / Linen	2 x 18W GU24	17.5" x 5.5"
DC818PG-A-318	120V	54W	Acrylic / Linen	3 x 18W GU24	20.8" x 6.1"
DC814PG-A-PD-218	120V	36W	Acrylic / Linen	2 x 18W GU24	17.5" x 12.5"
DC818PG-A-PD-318	120V	54W	Acrylic / Linen	3 x 18W GU24	20.8" x 13.1"