

MDF035

Wall Sconce



Features

Housing

Die-formed Cold-rolled Steel
 ADA Compliant
 Finish Option: -62 Satin Nickel -30 Oil Rubbed Bronze

Optical

Shade: High Transmission Glass Creates Excellent Light Distribution and Uniformity
 LED: High Efficiency, High CRI, Binned and Mixed to Reach Uniform Light

Electrical

High Power Factor (0.99), Low THD
 -EM: Built-in Emergency Light

Lamp


LED Type: Integrate LED Module , 3000K LED
 More Color Temperature Option 3500K, 4000K, 5000K
 GU24 Type: - CFL Bulb, 2700K or 4000K
 - 9W LED Bulb, 3000K or 4000K

Certification

UL/cUL or ETL/cETL Listed, Suitable for Damp Locations

Warranty

5 Years Limited Warranty on Driver and LED

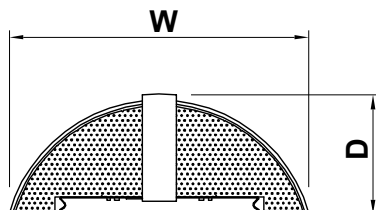

LED Type

Model	Input Voltage	Input Wattage	LED CT	CRI	Lumen (TYP)	Finish / Shade	Dimension (W x H x D)	Energy Star
MDF035D-xxxxK	120V	15W	3000K	>80	1150	Satin Nickel / Frosted Glass	10.3" x 11.5" x 4.0"	Yes
MDF035D-EM-xxxxK	120V	15W	3000K	>80	1150	Satin Nickel / Frosted Glass	10.3" x 11.5" x 4.0"	---

GU24 Type

Model	Input Voltage	Lamp	Finish	Shade	Dimension (W x H x D)	Energy Star
MDF035PG-213	120V	2 x 13W GU24	Satin Nickel	Frosted Glass	10.3" x 11.5" x 4.0"	---