

MDF075

Wall Sconce



Features

Housing

Die-formed Cold-rolled Steel

Optical

Shade: High Transmission Glass Creates Excellent Light Distribution and Uniformity

LED: High Efficiency, High CRI, Binned and Mixed to Reach Uniform Light

Electrical

High Power Factor, Low THD

Lamp

LED Type: Integrate LED Module , 3000K LED

More Color Temperature Option 3500K, 4000K, 5000K

GU24 Type: - CFL Bulb, 2700K or 4000K


- 9W LED Bulb, 3000K or 4000K

Certification

UL/cUL or ETL/cETL Listed, Suitable for Damp Locations

Warranty

5 Years Limited Warranty on Driver and LED

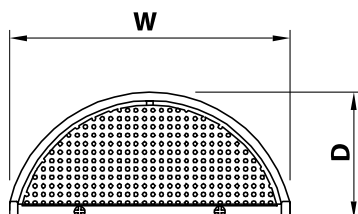

LED Type

Model	Input Voltage	Input Wattage	LED CT/CRI	Lumen (TYP)	Finish/Shade	Dimension (W x H x D)	Energy Star
MDF075D-xxxxK	120V	15W	3000K / >80	1230	ORB / Frosted Glass	8.0" x 14.0" x 3.6"	Yes

GU24 Type

Model	Input Voltage	Lamp	Finish	Shade	Dimension (W x H x D)	Energy Star
MDF075PG-223	120V	2 x 23W GU24	ORB	Frosted Glass	8.0" x 14.0" x 3.6"	