

MDF076-A

Wall Sconce



Features

Housing

Die-formed Cold-rolled Steel

Optical

Shade: High Transmission Glass Creates Excellent Light Distribution and Uniformity

LED: High Efficiency, High CRI, Binned and Mixed to Reach Uniform Light

Electrical

High Power Factor (> 0.95), Low THD (< 20%)

EM Model: Built-in Emergency Light and Bi-Level Lighting

JA8 Type: High Power Factor (> 0.98), Low THD (< 10%)

LED Driver, 120V Triac Dimming Type (Min. Dimming Level 3%)

Flicker Free: Meets JA10 Standard

Lamp

LED Type: Integrate LED Module, 3000K LED

More Color Temperature Option 3500K, 4000K, 5000K

GU24 Type: CFL Bulb (2700K, 4000K) or 9W LED Bulb (3000K, 4000K)

JA8 Model: 3000K only, LM80/TM21 60,000hrs Min. Rating


Certification

UL/cUL or ETL/cETL Listed, Suitable for Damp Locations

JA8 Type – CEL Listed, Meets Title24 JA8 Requirements

Warranty

5 Years Limited Warranty on Driver and LED

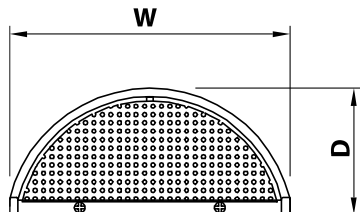

LED Type

Model	Input Voltage	Input Wattage	LED CT/CRI	Lumen (TYP)	Finish/Shade	Dimension (W x H x D)	Energy Star
MDF076D-A-xxxxK	120V	15W	3000K / >80	1250	ORB / Frosted Glass	8.0" x 14.2" x 3.5"	Yes
MDF076D-A-EM-xxxxK	120V	15W	3000K / >80	1250	ORB / Frosted Glass	8.0" x 14.3" x 3.8"	Yes

GU24 Type

Model	Input Voltage	Lamp	Finish	Shade	Dimension (W x H x D)	Energy Star
MDF076PG-A-223	120V	2 x 23W GU24	ORB	Frosted Glass	8.0" x 14.2" x 3.5"	---

JA8 Type

Model	Input Voltage	Input Wattage	LED CT/CRI	Lumen (TYP)	Finish/Shade	Dimension (W x H x D)	CEC T24 Listed
MDF076D-A(JA8)	120V	15W	3000K / >90	1050	ORB / Frosted Glass	8.0" x 14.2" x 3.5"	Yes