



# LED TUBE-LINEAR

## Model No. EUB-15W304H

A smart energy-saving alternative to traditional fluorescent lighting, the Euri Lighting **EUB-15W304H** outputs high lumens for low watts. With hybrid technology, this U-Shaped LED tube makes for uncomplicated installation with or without a ballast. Shatterproof glass and built to last 50,000 hours, Euri Lighting's **EUB-15W304H** reduces energy and maintenance worries with every use. See Euri Lighting EUB-15W305H for Cool White (5000K).

**\*Hybrid technology reduces maintenance expenses and allows adaptable installation methods whether a ballast is present or not**



**32W**  
REPLACEMENT

**15W**  
15 Watts

**4000K**  
Bright White

**LED Hybrid**  
Hybrid Technology

**High Output**

**\*Dimmable**

**Double Ended (Shunted)**

**Enclosed Fixture Suitable**

### Electrical Specifications


Model No.	Input Power	Input Voltage	Lumen Output	Beam Angle	Center Beam	CCT
EUB-15W304H	15 W	AC120-277 V	1950 lm	160°	320°	4000 K

CRI	Luminous Efficacy	Power Factor	Input Current	Base	Lamp Lifespan	Estimated Yearly Cost
83	130 lm/W	0.9	0.139 A	G13	50,000 Hrs.	\$ 1.80

### Mechanical Specifications

Rating	Operational Temperature	Inner Box QTY.	Master Box QTY.	Dimensions(in.)	UPC Code
Damp Rated	-4°F - 113°F	N/A	10 pcs	7.00"(W) x 22.44"(H)	20811174034708

### Product Dimensions

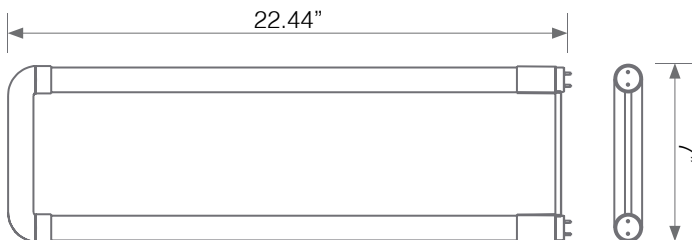



## Dimming Driver

Image	Model No.	Input Power	Input Voltage	Input current	Power Factor	Size of the wire in the module (in.)	Dimmable
	EED-100WD	100W	120-277 V	1A	0.9	<b>Left side:</b> Red(Out-L) -30" Blue(Out-N) -46" <b>Right side:</b> White(In-N) -21" Black(In-L) -21" Purple(DIM+) -21" Pink(DIM-) -21"	0-10V dimming

\* The dimmable function can only be used with Euri dimmable driver.  
 Please refer to the wiring diagram below. In case of any questions please consult info@eurilighting.com.

## Wiring Diagram

