



LED TUBE-LINEAR

Model No. EUB-15W305H

A smart energy-saving alternative to traditional fluorescent lighting, the Euri Lighting **EUB-15W305H** outputs high lumens for low watts. With hybrid technology, this U-Shaped LED tube makes for uncomplicated installation with or without a ballast. Shatterproof glass and built to last 50,000 hours, Euri Lighting's **EUB-15W305H** reduces energy and maintenance worries with every use. See Euri Lighting EUB-15W304H for Bright White (4000K).

***Hybrid technology reduces maintenance expenses and allows adaptable installation methods whether a ballast is present or not**



32W
REPLACEMENT

- 15W**
15 Watts
- 5000K**
Cool White
- LED Hybrid**
Hybrid Technology
- High Output**
- *Dimmable**
- Double Ended (Shunted)**
- Enclosed Fixture Suitable**

Electrical Specifications


Model No.	Input Power	Input Voltage	Lumen Output	Beam Angle	Center Beam	CCT
EUB-15W305H	15 W	AC120-277 V	1950 lm	160°	320°	5000 K

CRI	Luminous Efficacy	Power Factor	Input Current	Base	Lamp Lifespan	Estimated Yearly Cost
83	130 lm/W	0.9	0.139 A	G13	50,000 Hrs.	\$ 1.80

Mechanical Specifications

Rating	Operational Temperature	Inner Box QTY.	Master Box QTY.	Dimensions(in.)	UPC Code
Damp Rated	-4°F - 113°F	N/A	10 pcs	7.00"(W) x 22.44"(H)	20811174034715

Product Dimensions

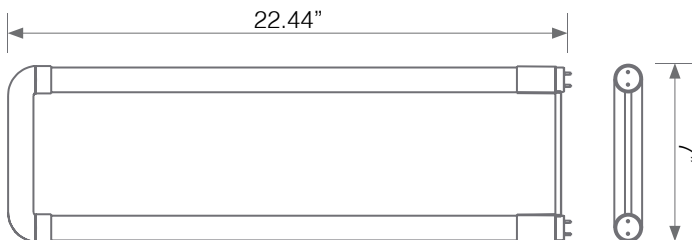



Dimming Driver

Image	Model No.	Input Power	Input Voltage	Input current	Power Factor	Size of the wire in the module (in.)	Dimmable
	EED-100WD	100W	120-277 V	1A	0.9	Left side: Red(Out-L) -30" Blue(Out-N) -46" Right side: White(In-N) -21" Black(In-L) -21" Purple(DIM+) -21" Pink(DIM-) -21"	0-10V dimming

* The dimmable function can only be used with Euri dimmable driver.
 Please refer to the wiring diagram below. In case of any questions please consult info@eurilighting.com.

Wiring Diagram

