BEL-AIR M LED

Architectural Indoor

Ę	(1)	LED	7

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	






FEATURES

- ADA Compliant
- CSA Listed Dry Location For Wall Mounting
- Frosted White Acrylic Diffuser
- LED Light Fixture
- Mounts Directly to 4" Junction Box (By Others)
- · Mounting Hardware Included
- Open Top
- Steel Mounting Pan w/ Matte Silver Powder Coat Finish
- Steel Trim w/ Matte Silver Powder Coat Finish




LINE DRAWING



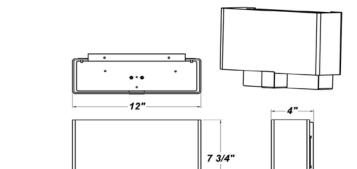



Copper



TERONLIGHTING.COM

E: SALES@TERONLIGHT.COM

33 DONALD DR, FAIRFIELD, OH 45014

P: 513.858.6004 F: 513.858.6038









Bronze

White

For RAL Colors & Custom Match -**Contact Teron** Lighting Inc.





BEL-AIR M LED

Architectural Indoor



- 1	v	 ro	Cara	

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	·

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
BLRM - Bel-Air M	L15.0-LT - 15W Leading and Trailing Edge Dimming Driver L25.0-ZE700 - 25W @ 700mA 0-10V Dimming Driver	120 - 277V	Not Applicable
ORDER INFO			
BLRM	L25.0-ZE700	120-277V	Not Applicable
Example ^			

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver (Standard) SN - Sand SW - Swedish Steel TB - Textured Black	27K - 2700K Color Temp 30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp	TCV - White Acrylic Top Cover TP - Tamper Resistant Screws
ORDER INFO			
Not Applicable	AC	27K	TCV
Not Applicable	AU	ZIN	TOV

PROD	SOURCE	30K SPECS
BLRM	L15.0	• 30K - 3000K Color Temp

	Color Temp 1630 LED Source Lumens 108.6 LED Source Lumens Per Watt		
L25.0	• 30K - 3000K Color Temp • 2734.2 LED Source Lumens • 113.9 LED Source Lumens Per Watt		

REPLACEMENT PART	PART NO	NOTES
White Acrylic Lens	3045360	
		Don't see the configuration you are looking for? Call us today at (513) 858-6004

