

# CADDY LG LED

Architectural Outdoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	



## FEATURES

- Die-Cast Aluminum Housing w/ Textured Bronze Polyester Powder Coat Finish
- Tempered Clear Glass Diffuser
- Surge Protector
- Fully Gasketed
- Mounts Direct to Flat Surface w/ Three #8 Wall Anchors (Not Included)
- CSA Listed Wet Location For Wall Mount (Down Light Only)
- Dark Sky Compliant
- Emergency Battery Available
- LED Light Fixture



## LINE DRAWING

LINE DRAWING NOT TO SCALE

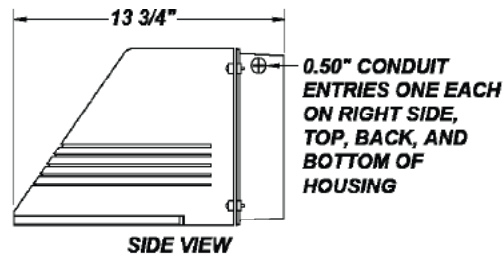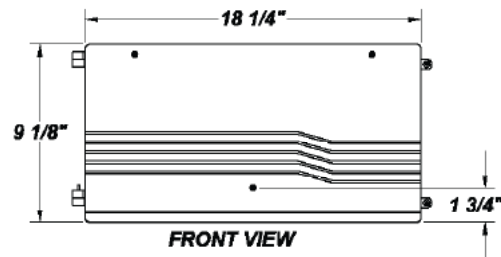


## FINISHES


Antique Copper




Antique Silver



Bronze Mist




Matte Silver




Metallic Black




Sand




Swedish Steel




Textured Black



Textured Bronze



Textured White



For RAL Colors & Custom Match - Contact Teron Lighting Inc.

# CADDY LG LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
CDL - Caddy LG	L48.0 - 48W @ 1050mA 0-10V Dimming Driver	120 - 277V	0-10V Dimming
ORDER INFO			
CDL	L48.0	120 - 277V	Not Applicable

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	<b>AC</b> - Antique Copper <b>AS</b> - Antique Silver <b>BT</b> - Bronze Mist <b>MB</b> - Metallic Black <b>SM</b> - Matte Silver <b>SN</b> - Sand <b>SW</b> - Swedish Steel <b>TB</b> - Textured Black	<b>BZ</b> - Textured Bronze (Standard) <b>TW</b> - Textured White  <b>30K</b> - 3000K Color Temp <b>40K</b> - 4000K Color Temp <b>50K</b> - 5000K Color Temp	<b>DIM</b> - Dimmable Driver (0 - 10V) <b>EBC</b> - 6W Integral EM Battery (-20°C) Available <b>EBCA12</b> - Title 20 Compliant 12 Watt Integral Battery <b>EBW</b> - 5.1W Emergency Battery Available <b>F</b> - Fused <b>FAL</b> - Frosted Acrylic Lens <b>PCL</b> - Photocell <b>PDIM</b> - Pulse Width Dimmable Driver (0 - 10V)
ORDER INFO			
Not Applicable	AC	30K	DIM

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS			
CDL	L48.0	<ul style="list-style-type: none"> <li>30K - 3000K Color Temp</li> <li>6283 LED Source Lumens</li> <li>130 LED Source Lumens Per Watt</li> </ul>			

REPLACEMENT PART	PART NO	NOTES
Clear Tempered Glass Lens (Standard)	37050	
Frosted Acrylic Lens	3043362	

Don't see the configuration you are looking for?  
Call us today at (513) 858-6004



TERONLIGHTING.COM  
 33 DONALD DR, FAIRFIELD, OH 45014  
 P: 513.858.6004 F: 513.858.6038  
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.