FALDO LED

Architectural Outdoor





QTY: COMMENTS:


FEATURES


• Aluminum Housing w/ Textured Black Polyester Powder Coat Finish

PROJECT: TYPE: PO#:

- Aluminum Heat-Sink Plate
- Aluminum Solid Top and Bottom End Plates
- · Luminous White Acrylic Panels
- Thermal Compensation Technology Ensures Longer LED Lifetime, Which is Ideal For Fixtures Being Placed in Area w/ Fluctuating or Higher Ambient Temperatures
- 100V 277V
- Mounts Directly to 4" Junction Box (By Others)
- ADA Compliant
- CSA Listed Wet Location
- LED Light Fixture
- Mounting Hardware Included

LINE DRAWING

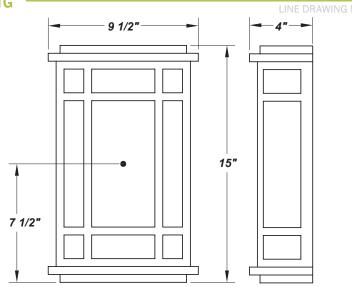

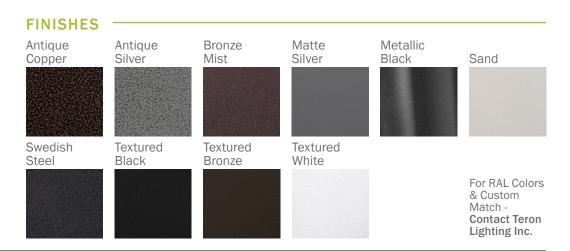



TERONLIGHTING.COM 33 DONALD DR, FAIRFIELD, OH 45014 P: 513.858.6004 F: 513.858.6038 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

FALDO LED PROJECT: TYPE: Architectural Outdoor PO#: QTY: COMMENTS: 5. (D) 🗊 🛐 Fixture Core VOLTAGE SOURCE/WATTAGE **DIMMING DRIVER** PRODUCT CODE FL - Faldo L18.0-TE500 - 18W @ 500mA 120V Not Applicable **ELV Dimming Driver** 277V L37.0-ZE1100 - 37.0W @ 1100mA 4-Wire 0-10V

ORDER INFO

Example ^ (may not represent a manufacturable product)

Dimming Driver

Aesthetics	&	Options	

TRIM		FINISH	COLOR TEMP	OPTIONS
Not Applicab	le	AC - Antique CopperTB - Tex Black (StandaAS - Antique SilverBlack (StandaBT - Bronze MistBZ - Tex 	ard) 30K - 3000K Color Temp itured 35K - 3500K Color Temp 40K - 4000K Color Temp	TP - Tamper-Proof Screw WAL - White Acrylic (Standard)
ORDER INFO				
Not Applica	ble	AC	27К	F
		a manufacturable product)		
PROD	SOURCE	30K SPECS		
Faldo	L18.0 L37.0	 80 CRI Typ. 30K - 3000K Color Temp 2484 LED Source Lumens 138 LED Source Lumens Per Watt 80 CRI Typ. 30K - 3000K Color Temp 3835 LED Source Lumens 103.6 LED Source Lumens Per Watt 		

REPLACEMENT PART	PART NO	NOTES
White Acrylic Lens Panel Set	9800660	Don't see the configuration you are looking for? Call us today at (513) 858-6004



 TERONLIGHTING.COM

 33 DONALD DR, FAIRFIELD, OH 45014

 P: 513.858.6004
 F: 513.858.6038

 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice. 2