


POLARIS SM LED

Architectural Outdoor




PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

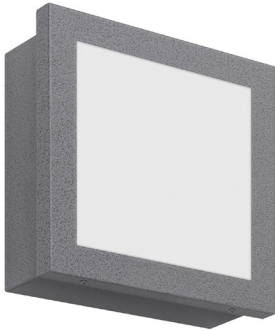


FEATURES

- Aluminum Housing w/ Textured Black Polyester Powder Coat Finish
- White Acrylic Front Lens Panel
- Aluminum Fascia w/ Textured Black Polyester Powder Coat Finish
- Mounts Directly to 4" Junction Box (By Others)
- J-Box Centered in Fixture
- ADA Compliant
- CSA Listed Wet Location For Wall or Ceiling Mount
- LED Light Fixture
- Mounting Hardware Included



LINE DRAWING

LINE DRAWING NOT TO SCALE

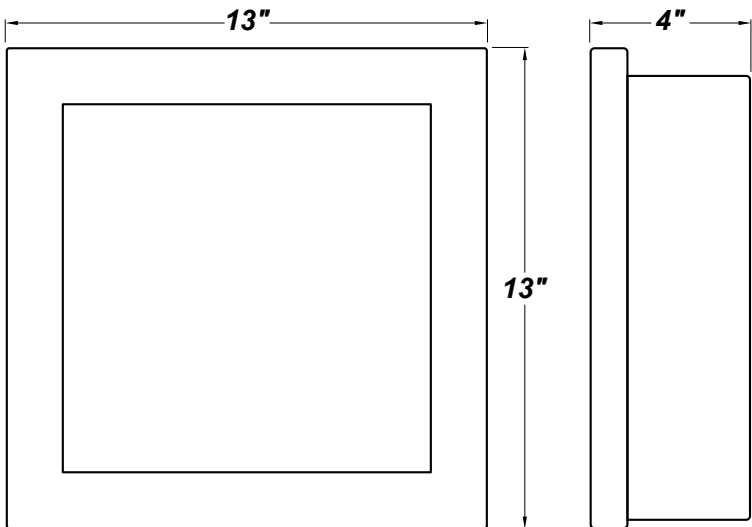

FINISHES

Antique Copper	Antique Silver	Bronze Mist	Matte Silver	Metallic Black	Sand
Swedish Steel	Textured Black	Textured Bronze	Textured White		

For RAL Colors & Custom Match - Contact Teron Lighting Inc.

POLARIS SM LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
PLSM - Polaris SM	L13.0 - (48) LED Array	120-277V	0-10V
ORDER INFO			
PLSM	L13.0	120-277V	0-10V

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver MB - Metallic Black (Standard) SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White	27K - 2700K Color Temp 30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp	Not Applicable
ORDER INFO			
Not Applicable	AC	27K	Not Applicable

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS				
PLSM	L13.0	<ul style="list-style-type: none">30K - 3000K Color Temp1700 LED Source Lumens105 LED Source Lumens Per Watt				

REPLACEMENT PART	PART NO	NOTES
White Acrylic Diffuser	3072960	L70 > 50,000 Hours
		Don't see the configuration you are looking for? Call us today at (513) 858-6004