

STADLER M LED

Architectural Outdoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	



FEATURES

- Die-Cast Aluminum Housing w/ Textured Bronze Polyester Powder Coat Finish
- Clear Tempered Glass Diffuser
- Aluminum Heat-Sink Plate
- Mounts Over 4" Junction Box w/ Easy-hang Wall Mounting Plate (Included)
- Thermal Compensation Technology Ensures Longer LED Lifetime, Which is Ideal For Fixtures Being Placed in Area w/ Fluctuating or Higher Ambient Temperatures
- 100V - 277V
- 40W Driver
- Surge Protector
- CSA Approved Wet Location For Wall Mounting
- Dark Sky Compliant
- LED Light Fixture




LINE DRAWING

LINE DRAWING NOT TO SCALE

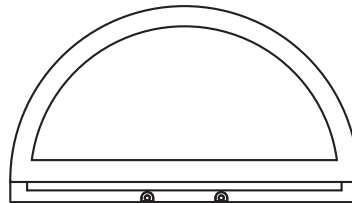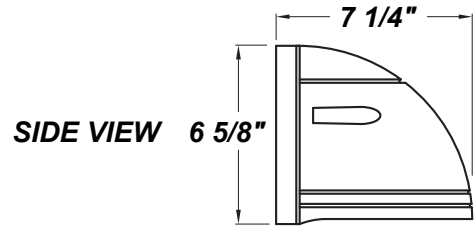

BOTTOM VIEW

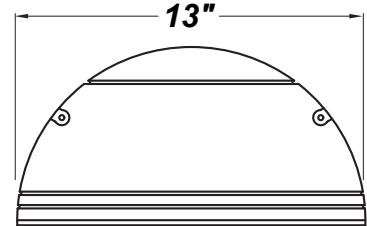


FRONT VIEW

FINISHES

Antique Copper




Antique Silver




Bronze Mist




Matte Silver



Metallic Black




Sand



Swedish Steel



Textured Black



Textured Bronze



Textured White



For RAL Colors & Custom Match - Contact Teron Lighting Inc.

STADLER M LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
SDM - Stadler M	L12.0-LT350 - 12.0W @ 350mA Triac and ELV Dimming Driver L18.4-12VDC - 18.4W @ 12V Direct Current Driver	100V 277V	Not Applicable
ORDER INFO			
SDM	L12.0-LT350	120V	Not Applicable

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver MB - Metallic Black SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze (Standard) TW - Textured White	30K - 3000K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	CGL - Clear Glass Lens (Standard) TP - Tamper Resistant Screws F - Fused
ORDER INFO			
Not Applicable	AC	30K	CGL

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS			
SDM	L12.0	<ul style="list-style-type: none"> 80 CRI typ. 30K - 3000K Color Temp 1740 LED Source Lumens 145 LED Source Lumens Per Watt 			
	L18.4	<ul style="list-style-type: none"> 80 CRI typ. 9 LED's Per ThermAdjust Module 30K - 3000K Color Temp 1896 LED Source Lumens 103 LED Source Lumens Per Watt 			

REPLACEMENT PART	PART NO	NOTES
Clear Glass Diffuser	37068	

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
33 DONALD DR, FAIRFIELD, OH 45014
P: 513.858.6004 F: 513.858.6038
E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.