

TURNBERRY M LED

Architectural Indoor



| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |


FEATURES

- Die-Formed Steel Housing with Textured White Powder Coat Finish
- High Impact White Acrylic Diffuser (50% DR Acrylic)
- Die-Cast Aluminum End Caps with Recessed Screw Holes
- Luminous White Acrylic Diffuser
- ADA Compliant
- CSA Listed Damp Location For Wall Mount
- LED Light Fixture



LINE DRAWING

LINE DRAWING NOT TO SCALE

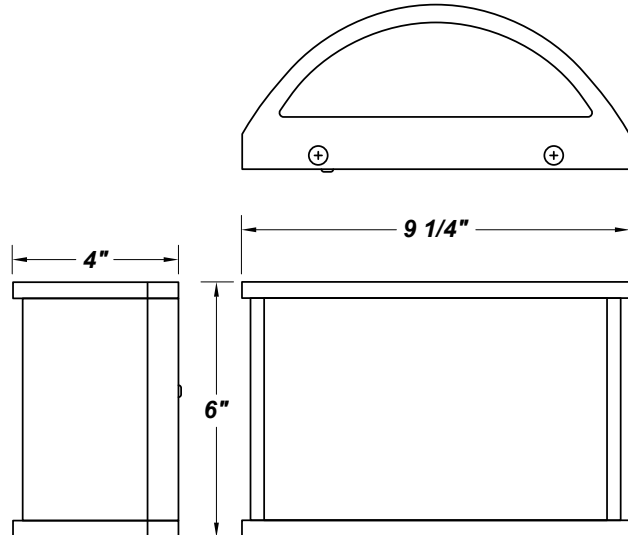

FINISHES

| | | | | | |
|----------------|----------------|-----------------|----------------|----------------|------|
| Antique Copper | Antique Silver | Bronze Mist | Matte Silver | Metallic Black | Sand |
| | | | | | |
| Swedish Steel | Textured Black | Textured Bronze | Textured White | | |
| | | | | | |

For RAL Colors & Custom Match - Contact Teron Lighting Inc.

TURNBERRY M LED

Architectural Indoor



Fixture Core

| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |

| PRODUCT CODE | SOURCE/WATTAGE | VOLTAGE | DIMMING DRIVER |
|-----------------------|---|-------------------------|----------------|
| TRM - Turnberry M LED | L10.0-LT300 - 10.0W LED Board @ 300mA ELV Low Voltage 2-Wire Dimming Electronic Driver (Leading or Trailing Edge) | 120-277V (50 / 60Hz) | Not Applicable |
| ORDER INFO | | | |
| TRM Example ^ | L10.0-LT300 | 120-277V | Not Applicable |

Aesthetics & Options

| TRIM | FINISH | COLOR TEMP | OPTIONS |
|-----------------------------|--|--|--|
| Not Applicable | AC - Antique Copper AS - Antique Silver BT - Bronze Mist MB - Metallic Black SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black | BZ - Textured Bronze TW - Textured White (Standard) 27K - 2700K Color Temp 30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp | F - Fused OEL - Single End Window TEL - Twin End Windows (Both Ends) TP - Tamper Resistant Screws |
| ORDER INFO | | | |
| Not Applicable Example ^ | AC | 27K | F |

| PROD | SOURCE | 30K SPECS | | | |
|------|--------|--|--|--|--|
| TRM | L10.0 | <ul style="list-style-type: none"> 30K - 3000K Color Temp 1536 LED Source Lumens 154 LED Source Lumens Per Watt | | | |

| REPLACEMENT PART | PART NO | NOTES |
|--|---------|-------|
| 6" White Acrylic Diffuser | 3055160 | |
| Frosted Polycarbonate End Diffuser (For OEL / TEL) | 3410862 | |

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

TURNBERRY M LED

Architectural Indoor



Fixture Core

| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |

| PRODUCT CODE | SOURCE/WATTAGE | VOLTAGE | DIMMING DRIVER |
|-----------------------|--|--------------------------------|-----------------------|
| TRM - Turnberry M LED | L11.0-LT350 - 11.0W LED Board @ 350mA ELV Low Voltage 2-Wire Dimming Electronic Driver (Leading or Trailing Edge) L11.0-ZE350 - 11.0W LED Board @ 350mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) | 120-277V (50 / 60Hz) | Not Applicable |
| ORDER INFO | | | |
| TRM Example ^ | L11.0-LT350 | 120-277V | Not Applicable |

Aesthetics & Options

| TRIM | FINISH | COLOR TEMP | OPTIONS |
|-----------------------------|--|--|--|
| Not Applicable | AC - Antique Copper AS - Antique Silver BT - Bronze Mist MB - Metallic Black SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White (Standard) | 27K - 2700K Color Temp 30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp | F - Fused OEL - Single End Window TEL - Twin End Windows (Both Ends) TP - Tamper Resistant Screws |
| ORDER INFO | | | |
| Not Applicable Example ^ | AC | 27K | F |

| PROD | SOURCE | 30K SPECS | | | | |
|------|--------|--|--|--|--|--|
| TRM | L11.0 | <ul style="list-style-type: none"> 30K - 3000K Color Temp 1792 LED Source Lumens 163 LED Source Lumens Per Watt | | | | |

| REPLACEMENT PART | PART NO | NOTES |
|--|---------|---|
| 6" White Acrylic Diffuser | 3055160 | |
| Frosted Polycarbonate End Diffuser (For OEL / TEL) | 3410862 | |
| | | Don't see the configuration you are looking for? Call us today at (513) 858-6004 |



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.