

# TRITON LED

Architectural Outdoor




PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

## FEATURES


- Aluminum Housing w/ Textured Bronze Polyester Powder Coat Finish
- Clear Tempered Glass Diffuser
- Aluminum Reflector
- Mounts Direct to Flat Surface w/ Two #8 Wall Anchors (Not Included)
- Surge Protector
- Fully Gasketed
- Dark Sky Compliant
- CSA Listed Wet Location For Wall Mounting -Down Light only
- Integral Emergency Battery Available
- LED Light Fixture

## LINE DRAWING

LINE DRAWING NOT TO SCALE

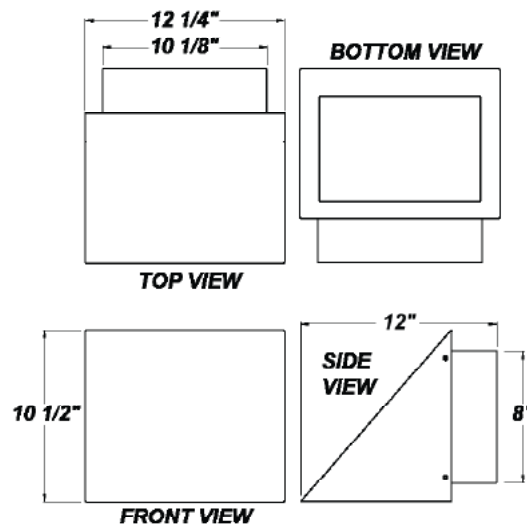

## FINISHES

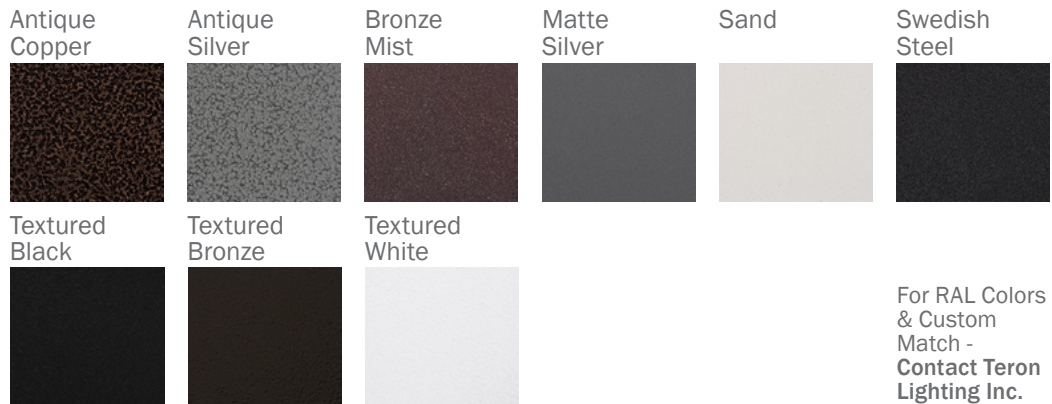

# TRITON LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
TTN - Triton LED	<b>L25.0-ZE700</b> - 25.0W LED Board @ 700mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) <b>L35.0-ZE1050</b> - 35.0W LED Board @ 1050mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	<b>120-277V</b> (50 / 60Hz)	<b>Not Applicable</b>
ORDER INFO			
TTN	L25.0-ZE700	120-277V	Not Applicable

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
<b>Not Applicable</b>	<b>AC</b> - Antique Copper <b>TB</b> - Textured Black <b>AS</b> - Antique Silver <b>BT</b> - Bronze Mist <b>BZ</b> - Textured Bronze <b>SM</b> - Matte Silver (Standard) <b>TW</b> - Textured White <b>SN</b> - Sand <b>SW</b> - Swedish Steel	<b>30K</b> - 3000K Color Temp <b>35K</b> - 3500K Color Temp <b>40K</b> - 4000K Color Temp <b>50K</b> - 5000K Color Temp	<b>EB</b> - Integral Emergency Battery <b>EBCA12</b> - Title 20 Compliant 12 Watt Integral Battery <b>F</b> - Fused <b>PCL</b> - Photocell* <b>TP</b> - Tamper Resistant Screws
ORDER INFO			
Not Applicable	AC	30K	EB

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS	40K SPECS			
TTN	L25.0	<ul style="list-style-type: none"> <li>30K - 3000K Color Temp</li> <li>3072 LED Source Lumens</li> <li>122.9 LED Source Lumens per Watt</li> </ul>				
	L35.0	<ul style="list-style-type: none"> <li>30K - 3000K Color Temp</li> <li>4608 LED Source Lumens</li> <li>129 LED Source Lumens per Watt</li> </ul>	<ul style="list-style-type: none"> <li>40K - 4000K Color Temp</li> <li>4820 Source Lumens</li> <li>135 LED Source Lumens per Watt</li> </ul>			

REPLACEMENT PART	PART NO	NOTES
Clear Glass Diffuser	37065	*Must Specify Voltage for Photocell

Don't see the configuration you are looking for?  
Call us today at (513) 858-6004



TERONLIGHTING.COM  
 33 DONALD DR, FAIRFIELD, OH 45014  
 P: 513.858.6004 F: 513.858.6038  
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.