

WLIN 4ft

Direct/Indirect Wall Mount

FEATURES & SPECIFICATIONS

INTENDED USE

Specification grade, low profile direct / indirect wall mount with up and forward throw optics, the WLIN is a sleek wall mount companion to the pendant mount indirect LIN (see T02PEND, LIN series). This wall mount is ideal for brightening perimeters of offices or spectacular wall lighting systems for corridors.

SIZE W x L x H in inches (mm)

5.03W x 49.25L x 2.68Dp (130 x 1250 x 70)

5.03W x 98.00L x 2.68Dp (130 x 2490 x 70) Tandems

MATERIALS & FEATURES

Housing is die-formed and embossed code 20 gage steel with die cast aluminum end caps. Standard finish is powder coat white. Custom colors available. An enhanced white aluminum reflector is included.

- CONTINUOUS ROW MOUNTING
- POST PAINTED POWDER COAT FINISH
- White standard, Custom colors available



MOUNTING

Wall bracket mount.

TYPICAL OPTIONS AND ACCESSORIES

Options of drivers and custom colors.

Companion wall mount fixture to the LIN series direct / indirect pendant.

ORDERING INFORMATION

Example: WLINPF48LH48W4800LDMV40K

STANDARD

WLIN		PF	48L		H57W5400L		DMV		40K		
Series			Size		Wattage and Lumen		Driver		Finish		
WLIN			48L 49.25"		E32W3450L		DMV 0-10V		Blank		White (standard)
Direct/Indirect					32 System Watts, 3450 Delivered Lumens		MV Multi - Volt				Custom colors available
\ Wall Mount					H48W4800L		120V-277V				
\ LIN Companion					48 System Watts, 4800 Delivered Lumens						
					H57W5400L						
					57 System Watts, 5400 Delivered Lumens						
Body Style					Function				Color Temperature		
PF	Perforated				Blank				30K		3000K
SD	Solid				J				35K		3500K
MW	White Lens				Standard Fixture includes end caps				40K		4000K
LV	Louver				Joiner -No end caps are furnished with joiner sections				50K		5000K

* Consult for more options

NO END CAPS ON JOINER SECTIONS.
The WLIN series may be mounted in continuous rows.
One pair of end caps are required per row.
For individual mount, order standard fixture.
For a continuous row, order one standard & balance as joiners.



Texas Fluorescents
Reinvented

LIN Series



Mounted on Ceiling

WLIN Series



Mounted on Wall

DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.



ORDERING INFORMATION

Example: WLINPF96LS48W4800LDMV40K

STANDARD

WLIN	PF	96L	S48W4800L	DMV	40K	
Series		Size	Wattage and Lumen	Driver		Finish
WLIN Direct/Indirect Wall Mount LIN Companion		96L 98.00"	E48W4800L 48 System Watts, 4800 Delivered Lumens H97W9600L 97 System Watts, 9600 Delivered Lumens H114W10800L 114 System Watts, 10800 Delivered Lumens	DMV 0-10V MV Multi - Volt 120V-277V		Blank White (standard) Custom colors available
Body Style		Function			Color Temperature	
PF Perforated SD Solid MW White Lens LV Louver		Blank Standard Fixture includes end caps J Joiner -No end caps are furnished with joiner sections			30K 3000K 35K 3500K 40K 4000K 50K 5000K	

* Consult for more options



Texas Fluorescents
Reinvented

LIN Series



Mounted on Ceiling

WLIN Series



Mounted on Wall

* Companion to the LIN series pendant mount indirect


WLIN

Direct/Indirect Wall Mount

DIMENSIONS


All dimensions are inches. Specifications subject to change without notice.

END VIEW

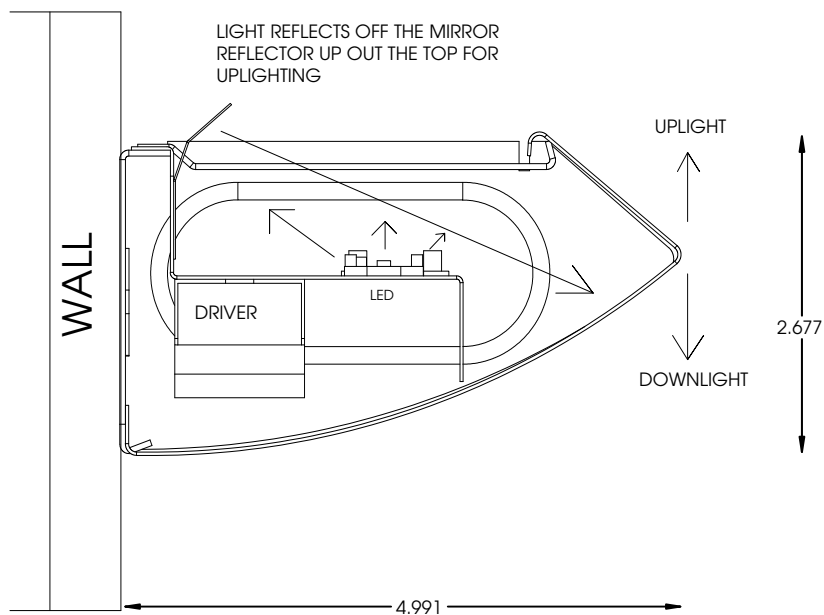


4-FOOT MODEL

TOP VIEW



8-FOOT MODEL

TOP VIEW

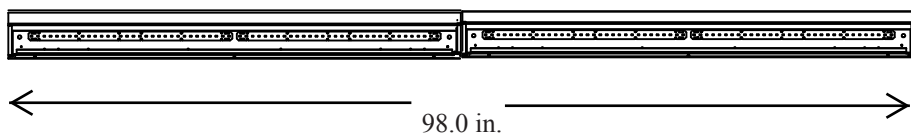

* Consult for more options

Saylite
2055 Luna Rd. Suite 142 Carrollton, TX 75006
Phone: 972-247-3171 Fax: 972-247-0200
www.saylite.com email: sales@saylite.com

Catalog Number:

Notes: