

FEATURES & SPECIFICATIONS

INTENDED USE

Specification grade, low profile direct / indirect wall mount with up and forward throw optics, the WLIN is a sleek wall mount companion to the pendant mount indirect LIN (see T02PEND, LIN series). This wall mount is ideal for brightening perimeters of offices or spectacular wall lighting systems for corridors.

SIZE W x L x H in inches (mm) 5.03W x 49.25L x 2.68Dp (130 x 1250 x 70) 5.03W x 98.00L x 2.68Dp (130 x 2490 x 70) Tandems

LAMP

2 lamp positions.

MATERIALS & FEATURES

Housing is die-formed and embossed code 20 gage steel with die cast aluminum end caps. Standard finish is powder coat white. Custom colors available. An enhanced white aluminum reflector is included.

• CONTINUOUS ROW MOUNTING

- POST PAINTED POWDER COAT FINISH
- White standard, Custom colors available



WLIN

Direct/Indirect Wall Mount

MOUNTING Wall bracket mount.

LISTING

Fixture and Ballast: UL Listed. Ballast: Thermally protected, class P, HPF, Non PCB.

TYPICAL OPTIONS AND ACCESSORIES Emergency ballasts and custom colors. Companion wall mount fixture to the LIN series direct / indirect pendant.

ORDERING INFORMATION Example: WLINPF2 328E120 WLIN PF 32 8 E120 2 Lamp Count Lamp Type Tandem Code Series (lamps not included) WLIN Finish Direct/Indirect 2 32 48in. T8 8 8ft. Tandem (4 lamp positions total) 2 48in. T8 32 Wall Mount Blank White (standard) 2 28 46in. T5 \ LIN Companion Custom colors available 8ft. Tandem (4 lamp positions total) 2 28 46in. T5 8 2 54 46in. T5HO 2 46in. T5HO 8 8ft. Tandem (4 lamp positions total) 54 Ballast Type **Body Style** Function Perforated PF Blank Standard Fixture includes end caps Electronic, 120V E120 SD Solid Joiner -No end caps are furnished with joiner sections E277 Electronic, 277V MW White Lens MV Electronic, Multivolt (120-277) LV Louver

See end of section for additional ballasts, finish codes, and options.

NO END CAPS ON JOINER SECTIONS.

The WLIN sereis may be mounted in continuous rows. One pair of end caps are required per row. For individual mount, order standard fixture.

For a continuous row, order one standard & balance as joiners.

Texas Fluorescents 2055 Luna Rd. Suite 142 Carrollton, TX 75006 Phone: 972-247-3171 Fax: 972-247-0200 www.texasfluorescents.com emaiil: sales@texasfluorescents.com

Catalog Number:


Notes:

WLIN Direct/Indirect Wall Mount



DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.

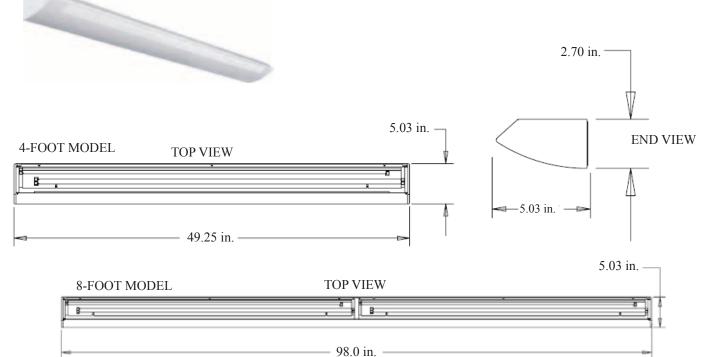

LIN Series

Mounted on Ceiling

WLIN Series



Mounted on Wall

* Companion to the LIN series pendant mount indirect

Catalog Number:
Notes: