

WLIN 4ft

Direct/Indirect Wall Mount

FEATURES & SPECIFICATIONS

INTENDED USE

Specification grade, low profile direct / indirect wall mount with up and forward throw optics, the WLIN is a sleek wall mount companion to the pendant mount indirect LIN (see T02PEND, LIN series). This wall mount is ideal for brightening perimeters of offices or spectacular wall lighting systems for corridors.

SIZE W x L x H in inches (mm)

5.03W x 49.25L x 2.68Dp (130 x 1250 x 70)

5.03W x 98.00L x 2.68Dp (130 x 2490 x 70) Tandems

MATERIALS & FEATURES

Housing is die-formed and embossed code 20 gage steel with die cast aluminum end caps. Standard finish is powder coat white. Custom colors available. An enhanced white aluminum reflector is included.

- CONTINUOUS ROW MOUNTING
- POST PAINTED POWDER COAT FINISH
- White standard, Custom colors available



MOUNTING

Wall bracket mount.

TYPICAL OPTIONS AND ACCESSORIES

Options of drivers and custom colors.

Companion wall mount fixture to the LIN series direct / indirect pendant.

ORDERING INFORMATION

Example: WLINPF48LS48W4800LDMV40K

STANDARD

WLIN	PF	48L	S57W5400L	DMV	40K	
Series		Size	Wattage and Lumen	Driver		Finish
WLIN Direct/Indirect Wall Mount LIN Companion		48L 49.25"	S32W3450L 32 System Watts, 3450 Delivered Lumens S48W4800L 48 System Watts, 4800 Delivered Lumens S57W5400L 57 System Watts, 5400 Delivered Lumens	DMV 0-10V MV Multi - Volt 120V-277V		Blank White (standard) Custom colors available
Body Style			Function		Color Temperature	
PF Perforated SD Solid MW White Lens LV Louver			Blank Standard Fixture includes end caps J Joiner -No end caps are furnished with joiner sections		30K 3000K 35K 3500K 40K 4000K 50K 5000K	

HIGH OUTPUT

WLIN	PF	48L	R72W7000L	DMV	40K	
Series		Size	Wattage and Lumen	Driver		Finish
WLIN Direct/Indirect Wall Mount LIN Companion		48L 49.25"	R72W7000L 72 System Watts, 7000 Delivered Lumens	DMV 0-10V MV Multi - Volt 120V-277V		Blank White (standard) Custom colors available
Body Style			Function		Color Temperature	
PF Perforated SD Solid MW White Lens LV Louver			Blank Standard Fixture includes end caps J Joiner -No end caps are furnished with joiner sections		30K 3000K 35K 3500K 40K 4000K 50K 5000K	

NO END CAPS ON JOINER SECTIONS.
The WLIN series may be mounted in continuous rows.
One pair of end caps are required per row.
For individual mount, order standard fixture.
For a continuous row, order one standard & balance as joiners.

* Consult for more options

Catalog Number:

Notes:

WLIN 8ft

Direct/Indirect Wall Mount



LIN Series



Mounted on Ceiling

WLIN Series



Mounted on Wall

DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.



ORDERING INFORMATION

Example: WLINPF96LS48W4800LDMV40K

STANDARD

WLIN	PF	96L	S48W4800L	DMV	40K	Finish
Series		Size	Wattage and Lumen	Driver		
WLIN Direct/Indirect Wall Mount LIN Companion		96L 98.00"	S48W4800L 48 System Watts, 4800 Delivered Lumens S97W9600L 97 System Watts, 9600 Delivered Lumens S114W10800L 114 System Watts, 10800 Delivered Lumens	DMV 0-10V MV Multi - Volt 120V-277V		Blank White (standard) Custom colors available
Body Style			Function		Color Temperature	
PF Perforated SD Solid MW White Lens LV Louver			Blank Standard Fixture includes end caps J Joiner -No end caps are furnished with joiner sections		30K 3000K 35K 3500K 40K 4000K 50K 5000K	

HIGH OUTPUT

WLIN	PF	96L	R144W13000L	DMV	40K	Finish
Series		Size	Wattage and Lumen	Driver		
WLIN Direct/Indirect Wall Mount LIN Companion		96L 98.00"	R144W13000L 144 System Watts, 13000 Delivered Lumens	DMV 0-10V MV Multi - Volt 120V-277V		Blank White (standard) Custom colors available
Body Style			Function		Color Temperature	
PF Perforated SD Solid MW White Lens LV Louver			Blank Standard Fixture includes end caps J Joiner -No end caps are furnished with joiner sections		30K 3000K 35K 3500K 40K 4000K 50K 5000K	

* Consult for more options

Catalog Number:
Notes:

WLIN

Direct/Indirect Wall Mount



LIN Series



Mounted on Ceiling

WLIN Series




Mounted on Wall

* Companion to the LIN series pendant mount indirect


DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.


END VIEW

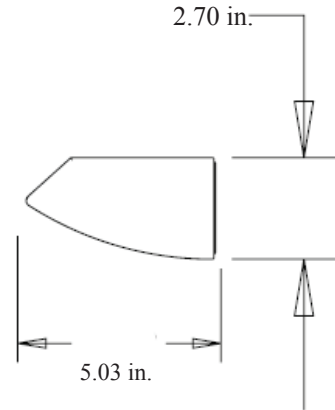

4-FOOT MODEL

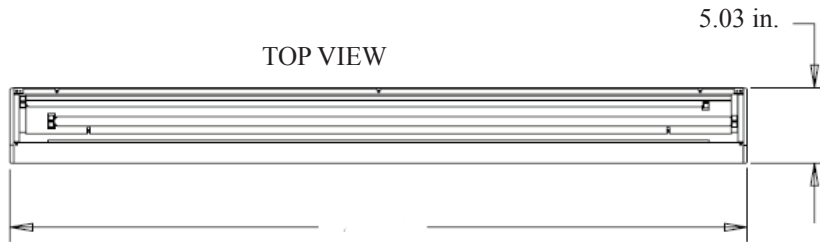

8-FOOT MODEL

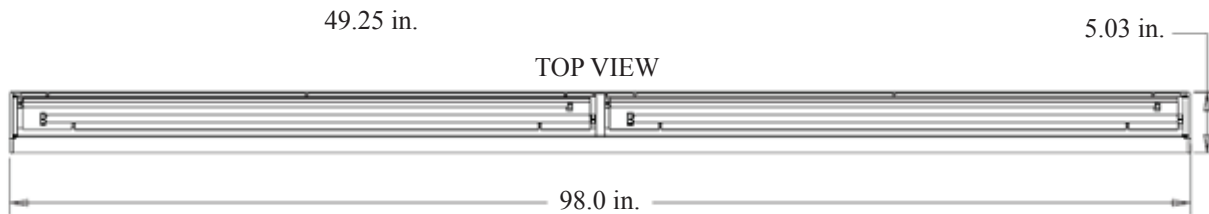

* Consult for more options

Catalog Number:
Notes:

Texas Fluorescents
 2055 Luna Rd. Suite 142 Carrollton, TX 75006
 Phone: 972-247-3171 Fax: 972-247-0200

www.texasfluorescents.com email: sales@texasfluorescents.com