




JOB NAME: _____

DATE: _____

TYPE: _____

DIMENSIONS:

DRIVER: 3.18"(W) x 5.51"(L) x 1.77"(H) w/18" LEADS

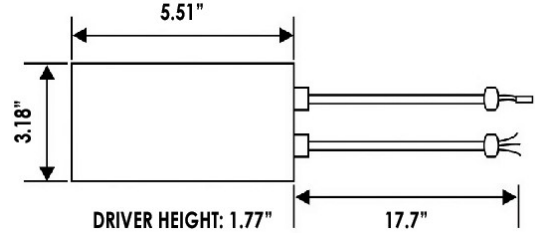

CRL-EGN-18W-50K CRL-EGN-18W-40K CRL-EGN-18W-30K

LED CRL Engine & Driver Unit

The LED Engine & Driver Unit combined with our oxidized metal trims provide you with the ultimate configuration for your recessed lighting needs. Great for retrofitting CFL, HID, Metal Halide and Incandescent.

ELECTRICAL SPECIFICATIONS:

- Input Wattage: 18W
- Input Voltage: 100-277VAC 50/60Hz
- Power factor: >0.9
- Efficacy: 89.38LM/W~93.18LM/W

HOUSING SPECIFICATIONS:

- Operating temperature: Below 113°F
- Lifespan: 50000 Hrs.
- IP rating: Damp Rated

CERTIFICATIONS: UL



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
CRL-EGN-18W-50K	18W	100~277V AC	1639LM	5000K
CRL-EGN-18W-40K	18W	100~277V AC	1624LM	4000K
CRL-EGN-18W-30K	18W	100~277V AC	1606LM	3000K

LIGHTING SPECIFICATIONS:

- Dimming: 0~10V dimmable
- LED type/brand: CREE COB
- Total lumens: 1606LM, 1624LM and 1639LM
- Color temperature: 3000K / 4000K / 5000K
- Color rendering index: >80
- Beam angle: 40°

WARRANTY: 5 years

