




### DIMENSIONS:

DRIVER: 3.18"(W) x 5.51"(L) x 1.77"(H) w/18" LEADS

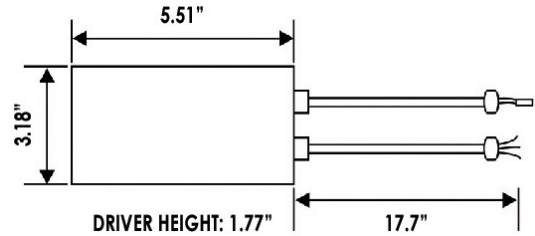

## CRL-EGN-54W-50K CRL-EGN-54W-40K

### LED CRL Engine & Driver Unit

The LED Engine & Driver Unit combined with our oxidized metal trims provide you with the ultimate configuration for your recessed lighting needs. Great for retrofitting CFL, HID, Metal Halide and Incandescent.

#### ELECTRICAL SPECIFICATIONS:

- Input Wattage: 18W
- Input Voltage: 100-277VAC 50/60Hz
- Power factor: >0.9
- Efficacy: 83.3LM/W

#### HOUSING SPECIFICATIONS:

- Operating temperature: Below 113°F
- Lifespan: 50000 Hrs.
- IP rating: Damp Rated

#### CERTIFICATIONS: UL



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
CRL-EGN-54W-50K	54W	100~277V AC	4500LM	5000K
CRL-EGN-54W-40K	54W	100~277V AC	4500LM	4000K

#### LIGHTING SPECIFICATIONS:

- Dimming: 0~10V dimmable
- LED type/brand: CREE COB
- Total lumens: 4500LM
- Color temperature: 4000K / 5000K
- Color rendering index: >80
- Beam angle: 40°

#### WARRANTY: 5 years

