CWS SERIES Commercial Lighting




CWS-48-MCTP

COMMERCIAL AND WAITING-ROOM INDOOR WALL SCONCE AND SUSPENDED LIGHTS

Multi Color Temperature & Multi Power/Wattage (Selectable)






Customer Name:

Project Name:

Note: Type:



This indoor commercial lighting is ideal for hotels, offices, retail outlets, restaurants, parking garages, storage rooms, conference rooms, education facilities, and more.

Features

- Incorporates Soft And Wide Edge-lit Illumination For A Uniform And Expansive Lighting Experience
- No Infrared Rays, No Ultraviolet Radiation, No Thermal Effect
- No Flickering, No Humming, No RF Interference
- Multi Color Temperature & Multi Power (Selectable Switch on Back of Fixture)

Technical Specifications

Electrical:

- Voltage: AC120V-277V 50/60Hz
- Power Factor: >0.90
- Wattage: 20W/30W/40W
- Fixture Operating Voltage: 36VDC
- Rated Input Current (mA): 337/ 253/ 168mA
- Total Harmonic Distortion: ≤ 20 %
- Efficacy: 85LPW

Mechanical:

- Aluminum Housing, White Finish
- 6FT Suspension Cables, 6FT 5-Wire SJT Power Cable, & Canopy Set Included.
- Coupling Bracket Included.
- External Driver Mounted On Top
- Operating Temperature: -68°F~104°F
- IP Rating: IP20 (Indoor Use Only)
- 5-Year Warranty

Lighting:

- Multi Color Temperature & Multi Power (Selectable Switch On Back Of Fixture)
- Dimmable: 0~10V Dimming
- Total Lumens: 3400LM
- Color Temperatures: 3500K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 360°
- Rated Life: 50,000 hrs

Applications:

 Ideal for hotel, offices, retail outlets, restaurant, parking garages, storage room, conference room, education facilities and more

Other Models:

• 20W | 1700LM | CWS-12-MCTP

• 20W | 1700LM | CWS-18-MCTP











Photometrics: CWS-48-MCTP






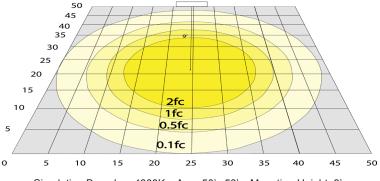

BUD Rating: B2-U2-G1

Simulation Based on 4000K Area 50'x 50' Mounting Height: 9'

Other Views:







Front View

Shown as Suspended View

Performance Table: CWS-48-MCTP

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
CWS-48-MCTP	20W 30W 40W	120~277V	1700LM 2550LM 3400LM	3000K 3500K 4000K	B2-U2-G1	85

Sample Ordering

Model

Size Watt/Color Temp.

CWS

48

48 -

MCTP

Accessories:

Blank = No Option For Accessories

CWS-48-MCTP-DWA = OPTIONAL DRYWALL MOUNTING ACCESSORY FOR CWS-48IN

Factory-Installed Options:

Blank = No Option For Accessories

OPT-EM-LP= EXTERNAL EMERGENCY BACKUP BATTERY

OPT-FWH-63= 6FT 3-WIRE WHIP OPT-FWH-65= 6FT 5-WIRE WHIP OPT-FWH-66= 6FT 6-WIRE WHIP

FACTORY-INSTALLED OPTIONS:

ACCESSORIESS:



OPT-EM-LP



OPT-FWH-63 OPT-FWH-65 OPT-FWH-66





Suspension Aircraft, Power Cable, Canopy & Drywall Installation Accessories Included