




DBEL-ACEM-WH-SDT-CW
DBEL-ACEM-BK-SDT-CW
DBEL-ACEM-BR-SDT-CW
DBEL-ACEM-N-SDT-CW

DIMENSIONS:

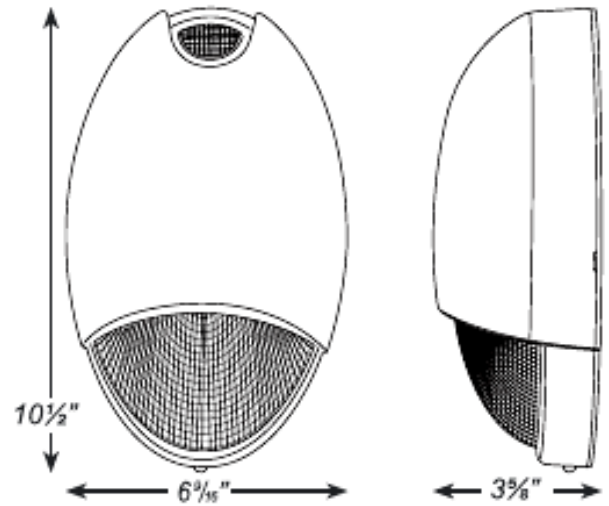

**COLD WEATHER DECORATIVE OUTDOOR LED
AC/EMERGENCY UNIT**

MODEL	VOLTAGE	WATTAGE	FINISH	BATTERY
DBEL-ACEM-WH-SDT-CW	120-277V	12W	White	NiCd
DBEL-ACEM-BK-SDT-CW	120-277V	12W	Black	NiCd
DBEL-ACEM-BR-SDT-CW	120-277V	12W	Dark Bronze	NiCd
DBEL-ACEM-N-SDT-CW	120-277V	12W	Nickel	NiCd

ELECTRICAL SPECIFICATIONS:

- Voltage: 120-277V
- Wattage: 12W (2 LEDs X 6W)per unit

HOUSING SPECIFICATIONS:

- Die-cast aluminum housing
- Finish: Powder-coated White or Black or Dark Bronze or Nickel finish
- Cold weather
- Photocell control sensor included
- Universal knockout pattern on back plate for wall mount
- Threated opening at the top of the enclosure for conduit mount
- Sealed and gasketed
- Suitable for Cold weather and wet location

TECHNICAL SPECIFICATIONS:

- Solid state electronics and charger board
- Push-to-test switch
- 4.8V, Rechargeable NiCd battery
- 90-minute EM-rated with push style test switch and red indicator light

WARRANTY: 3 years

- Meets UL924, NFPA life safety code, Local and State codes, NEC,OSHA

CERTIFICATIONS: UL

