

# LFCO SERIES

Outdoor Lighting

**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

LFCO-230W-40K  
LFCO-230W-50K




Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas.

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

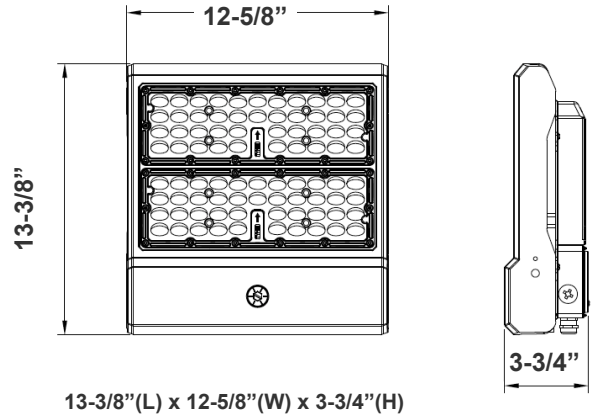

## Features

- LED Flood Light
- With snap-on & bolt mounting options for one-person installations.
- Select a mounting option (Sold separately)
- 70,000 Hours Rated Life
- 7-Year Warranty
- Optic Lens Type: III

## Technical Specifications

### Electrical:

- Voltage: 100-277VAC 50/60Hz
- Wattage: 230W
- Power Factor: >0.9
- Output Current: 0.25A
- Efficacy: 130 LPW
- THD: <20%

### Mechanical:

- Housing: Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- 6KV Lightning Surge Protection
- IP Rating: IP65
- Operating Temperature: -40°F to 104°F
- Suitable for Wet Locations
- Effective projected areas (EPA's) are:
  - Front = 0.38 square feet
  - Side = 0.30 square feet
  - Face = 1.05 square feet

### Lighting:

- Dimmable: 0~10V Dimming
- LED: Lumileds Lexeon 3030 high flux LED
- Solid State Lighting technology for long life, no Maintenance needed and High-Efficiency
- Lens Type: Optical TYPE III Lens, High Light TransmittancePC, Anti-UV and Flame Resistant
- Cord Type: 3.2' SJTW 18/3 AWG cable
- Total lumens: 30100LM
- Color temperature: 4000K/ 5000K
- Color rendering index: CRI ≥ 70
- Beam Angle: 140°x80°

### Applications:

- Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- Replace existing HID flood lights/ wall packs

### Other Models:

- 50W | 6900LM | LFCO-50W-40K
- 50W | 6900LM | LFCO-50W-50K
- 80W | 10800LM | LFCO-80W-40K
- 80W | 10800LM | LFCO-80W-50K
- 100W | 14000LM | LFCO-150W-40K
- 100W | 14000LM | LFCO-150W-50K
- 150W | 19900LM | LFCO-150W-40K
- 150W | 19900LM | LFCO-150W-50K
- 300W | 41000LM | LFCO-300W-40K
- 300W | 41000LM | LFCO-300W-50K
- 600W | 86000LM | LFCO-HL-600W-50K-TR





Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com | www.westgatecontrols.co




# Photometrics: LFCO-230W

TYPE III



BUD Rating: B4-U1-G3

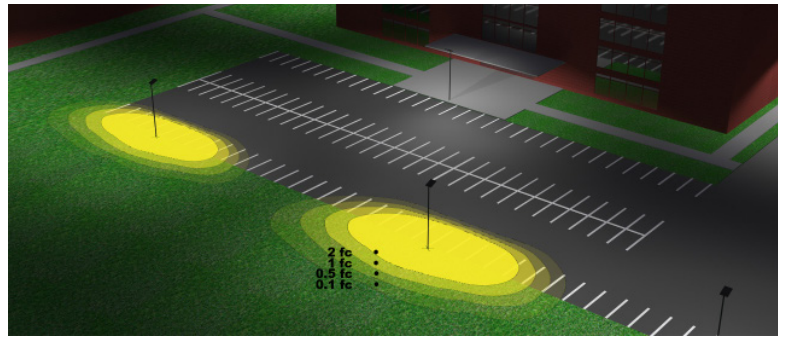

Area 95'x 126' Mounting Height: 20'

## Other Views:



Front View



Side View



Back View

## Performance Table: LFCO-230W

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LFCO-230W-40K	230W	120~277V	30100LM	4000K	B4-U1-G3	130
LFCO-230W-50K	230W	120~277V	30100LM	5000K	B4-U1-G3	130

## Sample Ordering

Model      Wattage      Color Temp.

LFCO - 230W -

40K = 4000K  
50K = 5000K

## Accessories Options

Blank = No Option For Accessories  
WEC-8RC = Optional Motion Sensor Remote Control

## Factory-Installed Options

Blank = No Option For Accessories  
OPT-EM-OD2EXT = Emergency Battery Backup  
OPT-3MPC = Microwave Photocell with a 1/2" threaded  
OPT-SEN-3MR-3 = Programmable Microwave Bi-Level Sensor

## MOUNTING OPTIONS:



## ACCESSORIES:





## Example:



- 1.LFCO-230W-40K (For LFCO 230W 4000K fixture 120-277V)
- 2.LFCO-230W-40K (For LFCO 230W 4000K fixture 120-277V)
- WEC-8RC (Remote Control)
- OPT-SEN-3MR-3 (Programmable Microwave Bi-Level Sensor)





## MOUNTING OPTIONS:

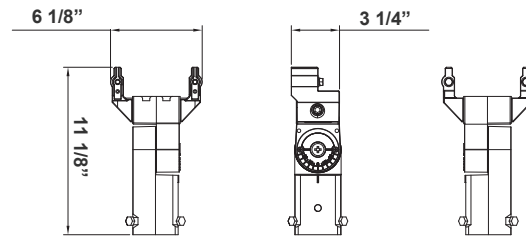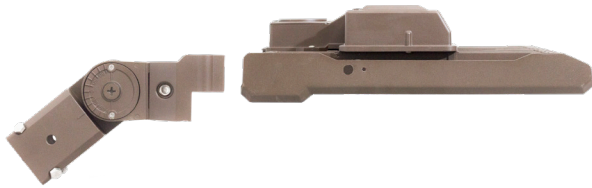



Model	DESCRIPTION	DIMENSION
LFCO-SF	Adjustable Slip Fitter for Pole Mount 2"—2-1/2"	6 1/8" X 11 1/8" X 3 1/4"

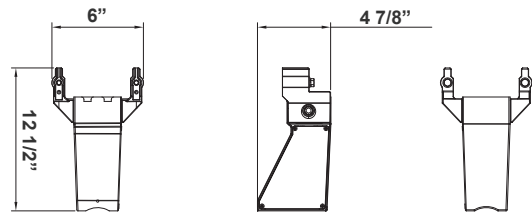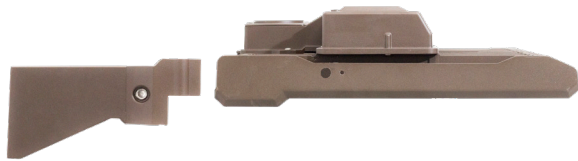

Model	DESCRIPTION	DIMENSION
LFCO-SA	Straight Arm for Shoe Box Applications Fits Square & Round Poles 3" Wide	6" X 12 1/2" X 4 7/8"

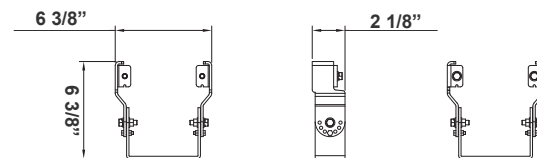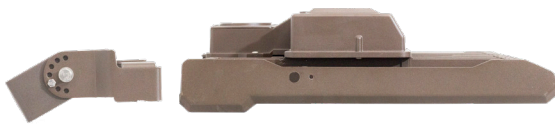

Model	DESCRIPTION	DIMENSION
LFCO-YK	Adjustable Yoke	6 3/8" X 6 3/8" X 2 1/8"

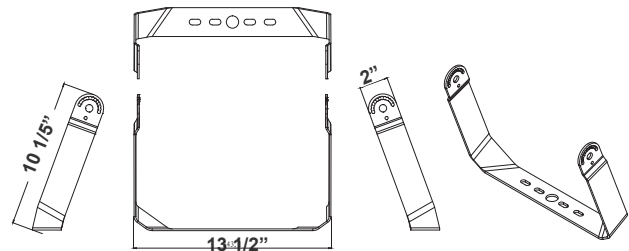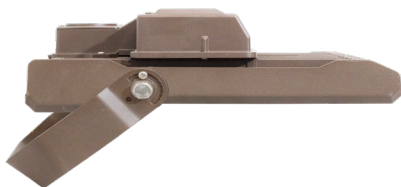

Model	DESCRIPTION	DIMENSION
LFCO-TR2	"U" Bracket	10 1/5" X 13 1/2" X 2"

