



LFXE SERIES Outdoor Lighting

LFXE-XL-200-300W-50K-P
BUILDER SERIES FLOOD/AREA LIGHTS WITH PHOTOCELL


WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

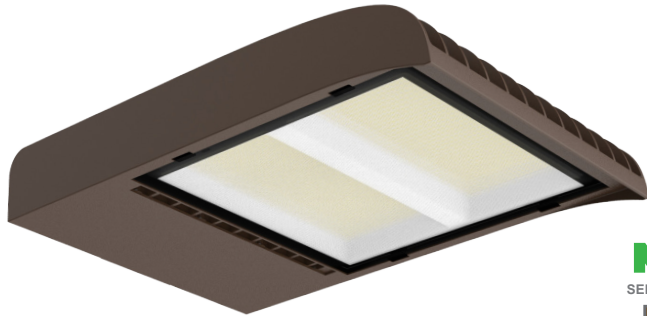

Customer Name: _____

Project Name: _____

Note: _____ | Type: _____

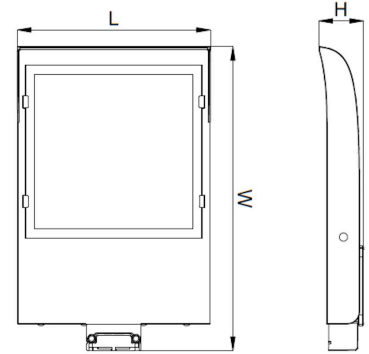

12-3/4"(H) x 20"(W) x 3"(D)

Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas.

Features

- Solid State Lighting Technology for Long Life
- No Maintenance Needed and High-Efficiency
- Optic Lens Type: III
- Multi-Power - The Switch is On the Bottom of the Fixture

Technical Specifications

Electrical:

- Voltage: 120~277V AC/50~60 Hz
- Wattage: 200W//240 W/300W
- Power Factor: >0.9
- Efficacy: 135 LPW

Mechanical:

- With Snap-on & Bolt Mounting Options for One- Person Installations. Select a Mounting Option (Sold Separately)
- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- Photocell Included (With Disconnect Switch)
- 10KV Lightning Surge Protection
- Effective Projected Areas (EPA's) are: Front = 0.38 ft², Side = 0.30 ft², Face = 1.05 ft²
- Operating Temperature: -40°F to 104°F
- IP Rating: IP65, Suitable for Wet Locations
- 7-Year Warranty

Lighting:

- Multi-Power - The Switch is On the Bottom of the Fixture
- Dimming: 0~10V dimmable
- Optic Lens Type: III
- Cord Type: 6' SJTW 18/3 AWG cable
- Total Lumens: 40500LM Max.
- Color Temperature: 5000K
- Color Rendering Index: ≥ 82
- Beam Angle: 120°X 90°
- 70,000 Hours Rated Life

Applications:

- Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- Replace existing HID flood lights/ wall packs

Other Models:




- 300W | 40500LM | LFXE-XL-200-300W-MCTP-P



Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com |



Photometrics: LFXE-XL-200-300W-50K-P

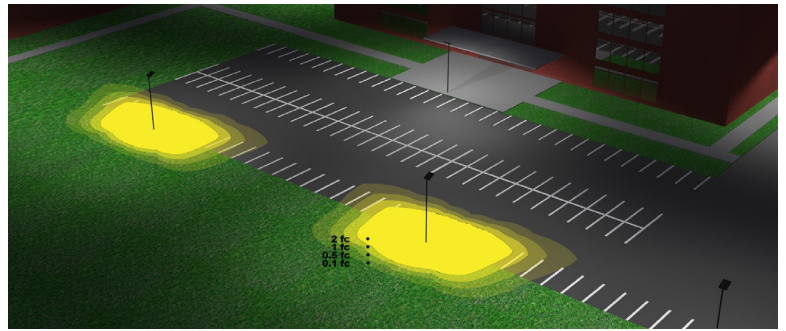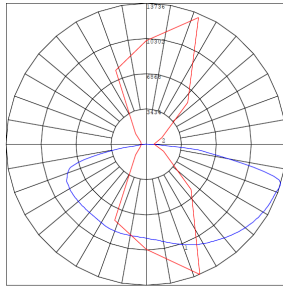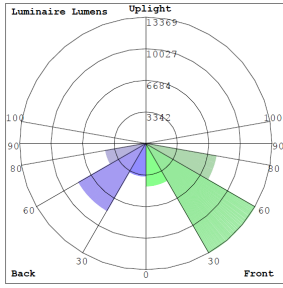

BUG Rating: B4-U0-G4

Area 65'x 120' Mounting Height: 20'

Other Views:



Side View
Shown with U bracket



Front View



Back View

Performance Table: LFXE-XL-200-300W-50K-P

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LFXE-XL-200-300W-50K-P	200W	120~277V	27000LM	5000K	B4-U0-G4	135
	240W		32400LM			
	300W		40500LM			

Sample Ordering

Model	Size	Min.	Max.	Wattage	Color Temp.	Photocell
LFX	XL	200	300W	50K	P	


Example:

1. LFXE-XL-200-300W-50K-P


(For LFXE 300W 5000K fixture 120 -277V)




Mounting Options:

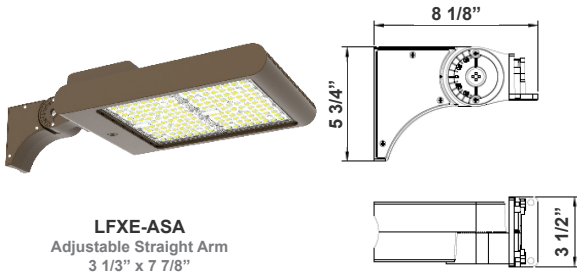


LFXE-ASA
Adjustable Straight Arm
3 1/3" x 7 7/8"

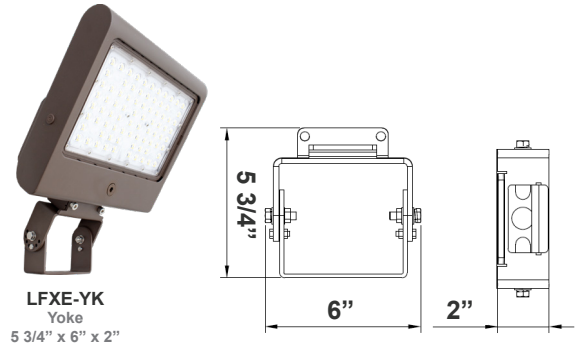

LFXE-YK
Yoke
5 3/4" x 6" x 2"

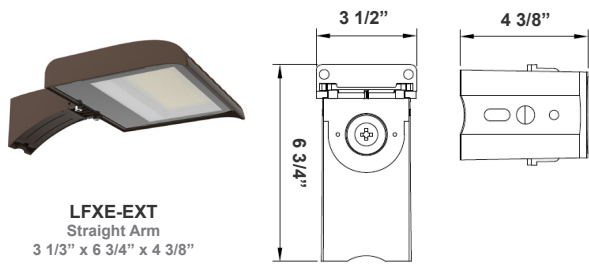


LFXE-EXT
Straight Arm
3 1/3" x 6 3/4" x 4 3/8"

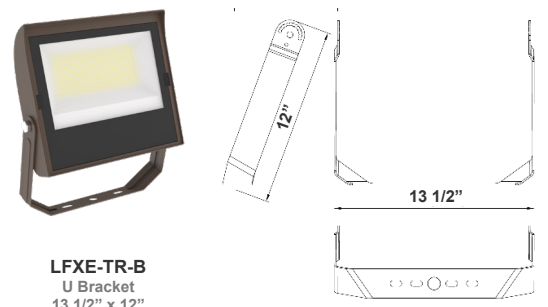


LFXE-TR-B
U Bracket
13 1/2" x 12"



LFXE-SF
Slip Fitter
3 1/3" x 7 7/8"

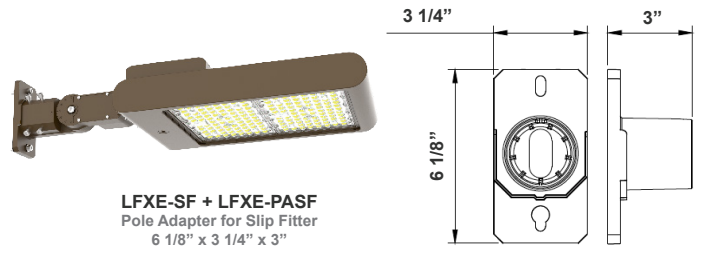

LFXE-SF + LFXE-PASF
Pole Adapter for Slip Fitter
6 1/8" x 3 1/4" x 3"

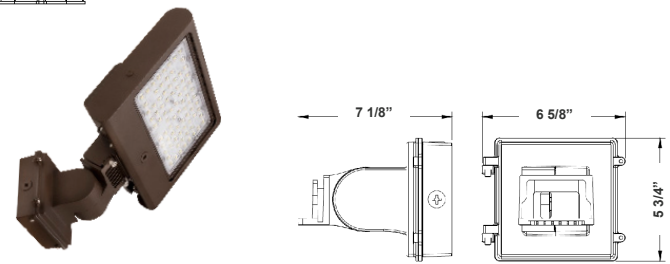

LFXE-AWB
Adjustable Wall Junction Box
7 1/8" x 6 5/8" x 5 3/4"

Color Options:

Custom Color Available

- Black
- Silver
- White
- Dark Bronze
Default color
- Green
- Red
- Yellow



COLOR CHART: * Choose from one of our Premium Colors with no set-up fee.

Gloss:



SILVER METALLIC
70 GLOSS
T357-GR105



SILVER METALLIC
30 GLOSS
T353-GR06



DARK RED 90
GLOSS
P009-RD02



INTERNATIONAL
ORANGE 90
GLOSS
T009-OG26



SAFETY ORANGE
90 GLOSS
T009-OG01



YELLOW 90
GLOSS
T009-YL14



YELLOW 90
GLOSS
T009-YL01



TRAFFIC GREEN
70 GLOSS
T007-GN16



GREEN 70 GLOSS
T007-GN13



GREEN 60 GLOSS
C006-GN03



BLUE 90 GLOSS
T009-BL01



DARK BLUE 80
GLOSS
T008-BL20



RAL 8028 TERRA
BROWN 90 GLOSS
C209-BR358

Hammer:




WHITE HAMMER
T013-WH09



BEIGE HAMMER
T013-BG38



GREY HAMMER
C013-GR08



SILVER
HAMMERTONE
T064-GR05




BLACK HAMMER
T013-BK62



RED HAMMER
T013-RD15



GREEN HAMMER
T013-GN220



BLUE HAMMER
T013-BL468



BRONZE HAMMER
T012-BR161

Texture:



WHITE TEXTURE
C031-WH120



FLINT GRAY
TEXTURE
T243-GR522



BLACK TEXTURE
C241-BK109



RED TEXTURE
T241-RD129



BLUE TEXTURE
C241-BL544




OIL RUBBED
BRONZE TEXTURE
T291-BR251

Vein:



BLACK/WHITE
VEIN
T075-WH34



SILVER VEIN
T375-BK26



COPPER VEIN
EXTERIOR
T075-BK211



GOLD VEIN
T375-BK10



COPPER VEIN
T375-BK07

