

JOB NAME: _____

DATE: ___

TYPE: ___

LRD Engine with Open Trim





LRD Engine with Pin Hole Trim LRD Engine with Slot Trim

LRD SERIES

3" LED WINGED RECESSED LIGHTS

Ideal for New as well as old residential and commercial constructions.


ELECTRICAL SPECIFICATIONS:


- Voltage: 120VAC
- Wattage: 7w/10W
- Power factor: >0.90
- Efficacy: Up to 70LM/W

HOUSING SPECIFICATIONS:

- Die-cast Aluminum with white powder coat finish
- Junction box included with fixture
- Type IC rated: Approved for direct contact with insulation
- Operating temperature: 104°F
- Lifespan: 50,000 Hrs.
- Air-tight and Type IC Rated: No housing Required
- damp location approved

DIMENSIONS:





LRD Engine

LIGHTING SPECIFICATIONS:

- Dimming: dimmable down to 10% using standard • **TRIAC LED dimmer**
- Total lumens: 490LM/700LM
- Color temperature: 2700K/3000K/3500K/4000K/5000K
- Color rendering index: >90
- Beam Angle: 30°

WARRANTY: 5 years

CERTIFICATIONS: ETL, ES



ORDERING NUMBER

LED ARCHITECTURAL WINGED RECESSED LIGHTS 3"

CATAL LRD	og no
SAMPLE	ORDEI
LRD-7	W-3

TALOG NO.	WATTAGE			
D	7W	7W		
	10W	10W		
APLE ORDERING:				
D-7W-30K-3WTR-MG				

COLOR TEMPERATURES			
27K	2700K		
30K	3000K		
35K	3500K		
40K	4000K		
50K	5000K		

TRIM (ADJUSTBLE) 3WTR OPEN TRIM **3WTRPH** PIN HOLE TRIM 3WTRSL SLOT TRIM

WH BK С MG ΗZ

TRIM FINISH

WHITE (ALL TRIMS) BLACK (ALL TRIMS) CLEAR (OPEN TRIMS ONLY) MATTE GOLD (OPEN TRIMS ONLY) MATTE SILVER (OPEN TRIMS ONLY)








JOB	NAME:	
500		_

DATE: _____

TYPE: _____

TYPE OF TRIMS & FINISHES

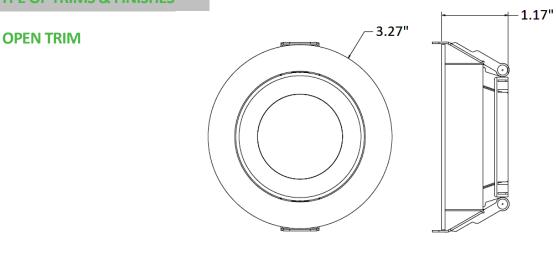


Open Trim Dimension



-1.62"

PIN HOLE TRIM

SLOT TRIM



Slot Trim Dimension



Rev. 2020-03-13

White WESTGATE MFG., INC.



White



- 1.62"

Black

3.11"

Pin Hole Trim Dimension