

# LRD SERIES RESIDENTIAL LIGHTING


- LRD-10W-27K-WTM2
- LRD-10W-30K-WTM2
- LRD-10W-35K-WTM2
- LRD-10W-40K-WTM2
- LRD-10W-50K-WTM2

LED ARCHITECTURAL RECESSED LIGHTS



Ideal for New as well as old residential and commercial constructions.

Customer Name: \_\_\_\_\_  
 Project Name: \_\_\_\_\_  
 Note: \_\_\_\_\_ | Type: \_\_\_\_\_

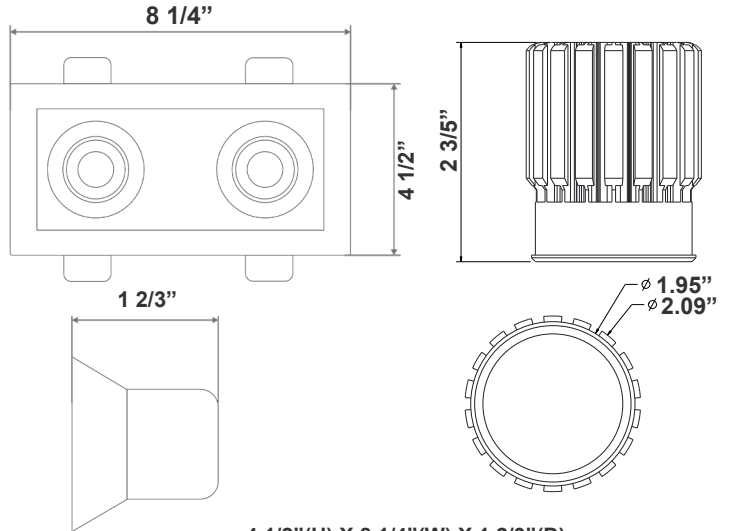

**4 1/2\"(H) X 8 1/4\"(W) X 1 2/3\"(D)**  
**Driver Box Dimensions:**  
**5-1/4\" x 1-5/8\" x 1-1/8\"**

## Features

- LED Architectural Recessed Trim
- Die-Cast Aluminum With White Powder Coat Finish
- 5-Year Warranty
- Junction Box Included With Fixture

## Technical Specifications

### Electrical:

- Voltage: 120VAC
- Wattage: 10W
- Power Factor: >0.90
- Efficacy: Up to 70 LM/W

### Mechanical:

- Die-cast Aluminum With White Powder Coat Finish
- Clear Glass Lens
- Junction Box Included With Fixture
- Type IC Rated: Approved for Direct Contact With Insulation
- Operating Temperature: 104°F
- Air-Tight and Type IC Rated: No Housing Required
- Damp Location Only
- 5-Year Warranty

### Lighting:

- Dimming: Dimmable Down to 10% Using Standard TRIAC LED Dimmer
- Total Lumens: 700LM
- Color Temperature: 2700K/3000K/3500K/4000K/5000K
- Color Rendering Index: >90
- Beam Angle: 30°
- Lifespan: 50,000 Hrs.

### Applications:



- Ideal for New as well as old residential and commercial constructions.

### Other Models:


- |                                     |                                     |
|-------------------------------------|-------------------------------------|
| • 10W   700LM   LRD-10W-27K-WTM1-WH | • 10W   700LM   LRD-10W-27K-WTM3-WH |
| • 10W   700LM   LRD-10W-30K-WTM1-WH | • 10W   700LM   LRD-10W-30K-WTM3-WH |
| • 10W   700LM   LRD-10W-35K-WTM1-WH | • 10W   700LM   LRD-10W-35K-WTM3-WH |
| • 10W   700LM   LRD-10W-40K-WTM1-WH | • 10W   700LM   LRD-10W-40K-WTM3-WH |
| • 10W   700LM   LRD-10W-50K-WTM1-WH | • 10W   700LM   LRD-10W-50K-WTM3-WH |



## Photometrics: LRD-10W-WTM2-WH

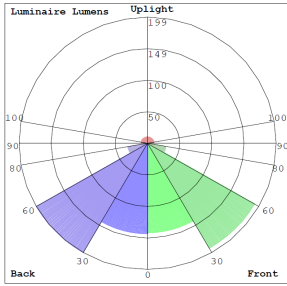


BUG Rating: B1-U2-G0

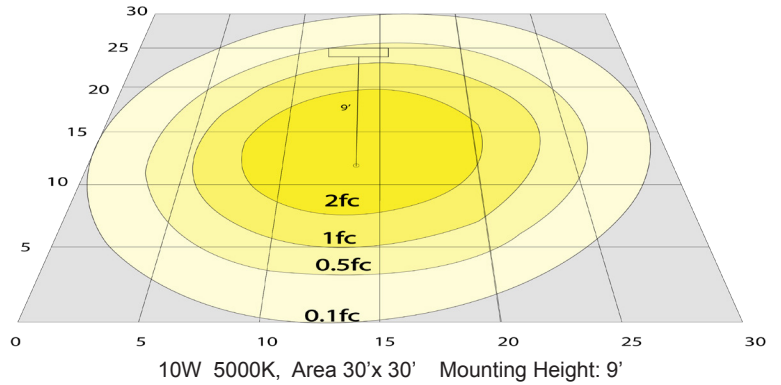

10W 5000K, Area 30'x 30' Mounting Height: 9'

## Other Views:

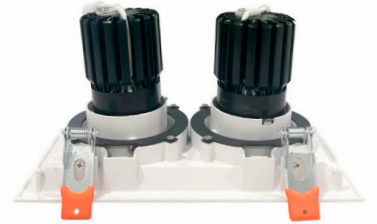

LRD-WTM2-WH  
LRD-WTM2-WH  
LRD-WTM2-WH  
LRD-WTM2-WH  
LRD-WTM2-WH

LRD-EGN-10W-27K-D  
LRD-EGN-10W-30K-D  
LRD-EGN-10W-35K-D  
LRD-EGN-10W-40K-D  
LRD-EGN-10W-50K-D

LRD-10W-27K-WTM2-WH  
LRD-10W-30K-WTM2-WH  
LRD-10W-35K-WTM2-WH  
LRD-10W-40K-WTM2-WH  
LRD-10W-50K-WTM2-WH

## Performance Table: LRD-10W-WTM2-WH

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LRD-10W-27K-WTM2-WH	10W	120V	700LM	2700K	B1-U2-G0	70
LRD-10W-30K-WTM2-WH				3000K		
LRD-10W-35K-WTM2-WH				3500K		
LRD-10W-40K-WTM2-WH				4000K		
LRD-10W-50K-WTM2-WH				5000K		

## Accessory:



Blank = No Option For Accessories  
LRD-FGL = LRD SERES FROSTED GUASS LENS

## Accessory:



LRD-FGL

## Sample Ordering

Model    Wattage    Color Temp.    Size    Color

LRD    -    10W    -    WTM2    -    WH

27K = 2700K  
30K = 3000K  
35K = 3500K  
40K = 4000K  
50K = 5000K

