

# RDL4S SERIES

RESIDENTIAL LIGHTING

**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

## RDL4S-SB-MCT5-WH

4" LED SNAP-IN RECESSED LIGHTS SMOOTH AND BAFFLE TRIMS INCL.


**MCT5** Multi Color Temperature (Selectable)

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

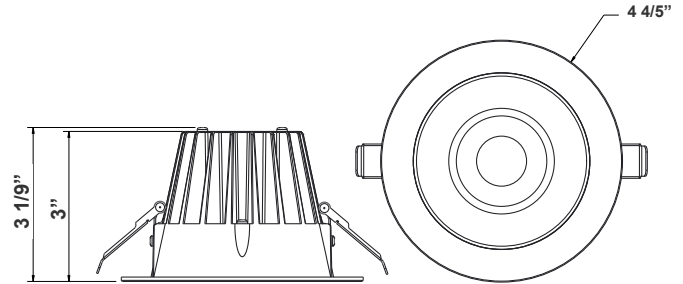

LED DOWNLIGHTS (SMOOTH and BAFFLE TRIM) - 4" LED Anti-glare Downlight Comes Complete With An External Driver In a Junction Box. Commercial Grade Quality With Architectural Design

## Features

- Smooth Trim, Baffle Trim Insert Included. Multi CCT (Selectable Switch on the Back of the driver )
- 5-Year Warranty
- Durable, Die-Cast Aluminum Alloy For Optimal Heat Dissipation

## Technical Specifications

### Electrical:

- Voltage: 120V AC
- Output Voltage: 36VDC
- Power Factor: >0.90
- Wattage: 15W
- Efficacy: 90 LPW
- Total Harmonic Distortion: ≤15 %

### Mechanical:

- 1-1/4" Thick
- Smooth Trim, Baffle Trim Insert Included.
- Up to 9 AWG 18 Wires
- Durable, Die-Cast Aluminum Alloy For Optimal Heat Dissipation
- Junction box Included, Install Directly in Insulated Ceilings (IC) Without Any Thermal Housing
- Maximum Ambient Temperature: -40°F to 104°F
- Damp Location
- 5-Year Warranty

### Lighting:

- Multi CCT (Selectable Switch on the Back of the driver )
- Dimming: Dimmable Down to 10% Using a Standard TRIAC LED Dimmer
- Can Rotate after Installation to Align
- LED: High Brightness COB LED
- Optics: White Translucent Acrylic
- Total Lumens: 1350LM
- Color Temperatures: 2700K/ 3000K/ 3500K/ 4000K/ 5000K
- Color Rendering Index: CRI ≥ 90
- Beam Angle: 36°
- Rated Life: 50,000 hrs

### Applications:

- LED recessed trims have been designed to be a flexible lighting solution for new construction applications, Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications

### Other Models:

- 15W | 1350LM | SDL4S-SB-MCT5-WH




Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com




WG-03212023

## Photometrics: RDL4S-SB-MCT5-WH

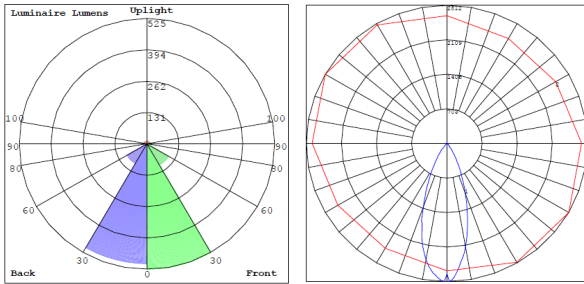

BUG Rating: B2-U2-G0

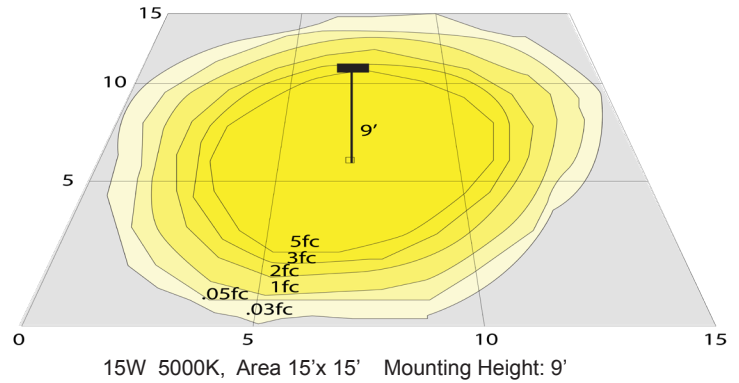

## Other Views:



Side View



Baffle Front View



Smooth Front View



Junction box 1-1/4" thick included with fixtures  
Back View

## Performance Table: RDL4S-SB-MCT5-WH

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
RDL4S-SB-MCT5-WH	15W	120V	1350LM	2700K	B2-U2-G0	90
				3000K		
				3500K		
				4000K		
				5000K		

## Sample Ordering

-  -  -

### Accessories:

Blank = No Option For Accessories  
 RSL4-RI-13 = 4" ROUND ROUGH-IN PLATE, 13" LONG  
 RSL4-RI = 4" ROUND ROUGH-IN PLATE, 26" LONG  
 RSL-346-RIBH = 3", 4", 6" (ADJUSTABLE) ROUND GALVANIZED PLATE WITH BAR HANGERS  
 RSL4-GR = GOOF RING FOR 4IN LIGHTS WITH BUTTERFLY WINGS

### Factory-Installed Option:

Blank = No Option For Accessories  
 OPT-EM-DL1EXT = EXTERNAL BATTERY BACKUP

### ACCESSORIES:



**RSL-346-RIBH**  
3", 4", 6" (Adjustable) Round Galvanized plate with Bar Hangers



**RSL4-RI-13**  
4" Round Rough-in Plate, 13" Long



**RSL4-RI**  
4" Round Rough-in Plate, 26" Long



**RSL4-GR**  
Goof Ring For 4in Lights With Butterfly Wings

### FACTORY-INSTALLED OPTION:



**OPT-EM-DL1EXT**  
EXTERNAL BATTERY BACKUP



## Compatible Dimmer List:

MODEL NO.	BRAND
6631-1LT	LEVITON
MACL-153MLH-AL	LUTRON
TGCL-153PH-LA	LUTRON
DVW-603PGH-WH	LUTRON
CT-600PR-WH	LUTRON
LGCL-153PHL-IV	LUTRON
TGCL-153PH-LA	LUTRON
LSLV603PWV	LUTRON
6674-POW	LEVITON
DVCL-153P	LUTRON
MSCL-OP153P	LUTRON
CTCL-153P	LUTRON
MACL-153M	LUTRON
HCL453PTCCCV6	PASS & SEYMOUR
LSLV603PWV	PASS & SEYMOUR

