SFX SERIES OUTDOOR LIGHTING

SFX-G9-500W-45D-RGB


LED STADIUM FLOOD LIGHTS



Customer Name:
Project Name:
Note: Type:



Ideal for Stadium lighting, Sports fields, parking lots, docks railway and container yards, Architectural lighting, Industrial and commercial exterior lighting, trade shows, exhibitions

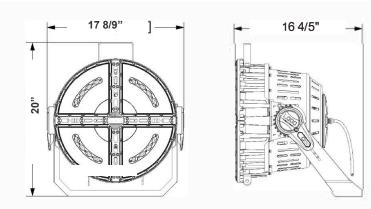

20"(H) x 17 8/9"(W) x 16 4/5"(D)

Features

- Die-Cast Aluminum Housing With Powder Coat Finish (Black)
- LED: Lumileds Luxeon SMD 3535

- 7-year Warranty
- Lens: Prismatic Polycarbonate Lens

Technical Specifications

Electrical:

Voltage: 120-277V AC 60Hz

Wattage: 500W

Power Factor: >0.90~0.97

Efficacy: 150LPW

Mechanical:

- Die-Cast Aluminum Housing with Powder Coat Finish (Black)
- In A DMX Lighting Setup, Lights Need To Be Connected With cables. The Cables Can Be "Daisy Chained" So That Each Light Can Plug Into The One Before It Instead Of All Lights Plugging Into The DMX Board Itself
- Cord Type: 3' SJTW 18/3 AWG Cable
- Effective Projected Area (EPA): 1.8 (sq. ft.)
- Operating Temperature: -40°F to 122°F
- IP Rating: IP66, Suitable for Wet Locations
- 7-year Warranty

Lighting:

- Lens: Prismatic Polycarbonate Lens
 LED: Lumileds Luxeon SMD 3535
- Total lumens: 75000LM
- Color Temperatures: Red/Green/Blue
 Color Bondering Indon CRI > 70
- Color Rendering Index: CRI ≥ 70
- Rated Life: 70,000 Hrs
- Beam Angle: 45°

Applications:

 Stadium lighting, Sports fields, parking lots, docks, railway and container yards, Architectural lighting, Industrial and commercial exterior lighting, trade shows, exhibitions.

• 800W | 120000LM | SFX-G9-800W-45D-RGB












Photometrics: SFX-G9-500W-45D-RGB



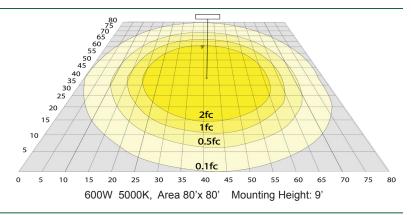

Other Views:







Front View



Back View

Performance Table: SFX-G9-500W-45D-RGB

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
SFX-G9-500W-45D-RGB	600W	120~277V	75000LM	RGB	B5-U0-G2	150

Sample Ordering

Model Style		Watt	Size	Co	Color Temp.		
SFX	_	G9	500W –	45D	_	RGB	

Accessories:

Blank = No Option For Accessories SFX-G9-SH1= SHROUD FOR G9 600W STADIUM LIG SFX-G9-SF= SLIP FITTER, COMES WITH ITS OWN REPLACEMENT "U" BRACKET

ACCESSORIES:



SFX-G9-SH1



SFX-G9-SF

Example:

1. SFX-G9-500W-45D-RGB

2. SFX-G9-500W-45D-RGB SFX-G9-SH1 (FOR SFX 500W RGB FIXTURE 120-277V)

(FOR SFX 500W RGB FIXTURE 120-277V) (SHROUD FOR 500W)



