

# WLL SERIES

LANDSCAPE LIGHTING

**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

WLL-105-30K-BK 6W  
INTEGRATED LED WELL LIGHT




Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

Selection:

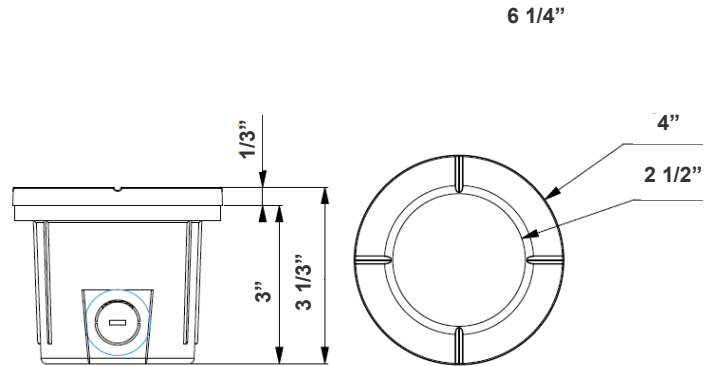

3 1/2"(H) x 4"(W)

The fixture has classic traditional appearance, professional light distribution design, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations

## Features

- Die-cast Aluminum Housing
- Solid State Lighting Technology for Long Life, No Maintenance Needed and High-Efficiency
- 1-Year Warranty
- Optical PC Flat Lens
- LED: Built in integrated LED

## Technical Specifications

### Electrical:

- Voltage: 12-24V AC/DC
- Power Factor: >0.9
- Wattage: 6W
- Input current: 1A Max
- Efficacy: 96LPW

### Mechanical:

- Die-cast Aluminum Housing
- Traffic Rated: They are not likely to get damaged from activity around the light, including lawn care, as well as foot and auto traffic
- Optical PC Flat Lens
- 3" PVC Sleeve with three 1/2" KO. 2 on sides, 1 on bottom
- Solid State Lighting Technology for Long Life, No Maintenance Needed and High-Efficiency
- High Conductive Aluminum LED Board
- IP Rating: IP65
- Operating Temperature: -4°F to 104°F
- Suitable for Wet Locations
- 1-Year Warranty

### Lighting:

- LED: Built in integrated LED
- Total lumens: 580LM
- Color Temperatures: 3000K
- Color Rendering Index: CRI ≥ 90
- Beam Angle: 52°
- Lifespan: 50,000 Hrs.

### Applications:

- The fixture has classic traditional appearance, professional light distribution design, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations

### Other Models:

- 6W | 500LM | WLL-106-30K-BK • 6W | 500LM | WLL-157-30K-BK • 6W | 400LM | WLL-159-30K-BK • 6W | 580LM | WLL-181-30K-BK






Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com



WG-03282022

## Photometrics: WLL-105-30K-BK

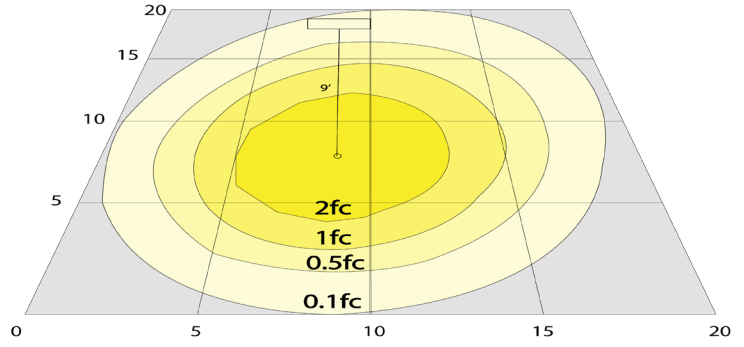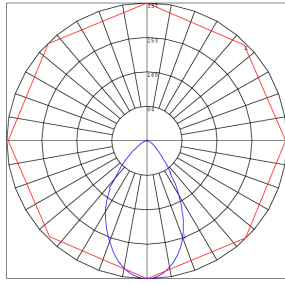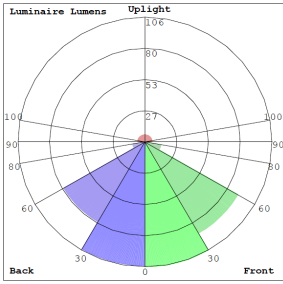

BUG Rating: B0-U1-G0

6W 3000K, Area 20'x 20' Mounting Height: 9'

## Other Views:



Side View



Top View



Bottom View

## Performance Table: WLL-105-30K-BK

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
WLL-105-30K-BK	6W	12-24V	580LM	3000K	B0-U1-G0	96

## Sample Ordering

Model	Style	Color Temp.	Finish
WLL	105	30K	BK

## Accessories:

Blank = No Option For Accessories

LSWN1 = Bag of 24, Waterproof Wire Connectors, For Up to Two 14-2 + One 16-2 Cables

LSWN2 = Box of 24, Waterproof Wire Connectors, For Up to Three 12-2 Cables

LSWN2-100 = Jar of 100, Waterproof Wire Connectors, For Up To Three 12-2 Cables

## ACCESSORIES:



**LSWN2-100**  
Jar of 100, Waterproof wire connectors, for up to three 12-2 cables



**LSWN1**  
Bag of 24, Waterproof wire connectors, for up to two 14-2 + one 16-2 cables



**LSWN2**  
Box of 24, Waterproof wire connectors, for up to three 12-2 cables

## Example:

1. WLL-105-30K-BK

(FOR WLL 6W 30K FIXTURE 12-24V)

## Other Model: WLL-106-30K-BK



Side View



Top View



Bottom View

**WESTGATE**

Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com

