

# WMC2 SERIES LANDSCAPE LIGHTING

WMC2-12V-DL-MCT-BN  
WMC2-12V-DL-MCT-ORB


**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

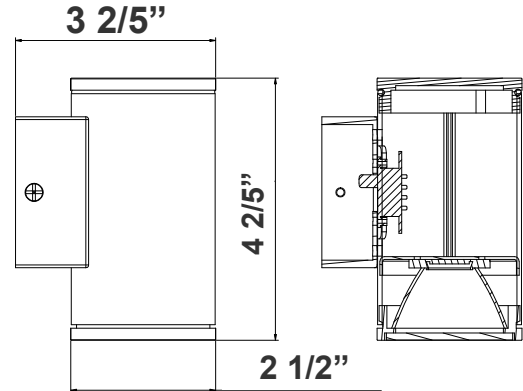

2 1/2"(W) x 4 2/5"(H) x 3 2/5"(D)

Ideal for general site lighting, walkways, and stairways, alleys, loading docks, doorway, pathway and parking areas

## Features

- Finish: Brushed Nickel & Oil-Rubbed-Bronze
- Multi CCT (Selectable Switch on the Back of the Bracket, Protected by Silicon Cover to be Waterproof)
- 7-Year Warranty
- Outdoor Down Light

## Technical Specifications

### Electrical:

- Voltage: 12V AC
- Power Factor: >0.90
- Wattage: 5W
- Efficacy: 66 LPW
- THD: <20%

### Mechanical:

- Housing: Die-cast Aluminum & Glass
- Finish: Brushed Nickel & Oil-Rubbed-Bronze
- Maximum Ambient Temperature: -68°F to 104°F
- Wet Location
- IP Rating: IP65

### Lighting:

- Dimming: TRIAC Dimming (Using Standard TRIAC LED Dimmers)
- Total Lumens: 330LM
- Color Temperatures: 3000K/4000K/5000K
- Multi CCT (Selectable Switch on the Back of the Bracket, Protected by Silicon Cover to be Waterproof)
- Color Rendering Index: CRI ≥ 80
- Rated life: 70,000 hrs
- Beam angle: 45°

### Applications:

- Ideal for general site lighting, walkways, and stairways, alleys, loading docks, doorway, pathway and parking areas

### Other Models:

- 10W | 650LM | WMC2-12V-UDL-MCT-BN
- 10W | 650LM | WMC2-12V-UDL-MCT-ORB





Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com




WG-07202022

## Photometrics: WMC2-12V-DL-MCT

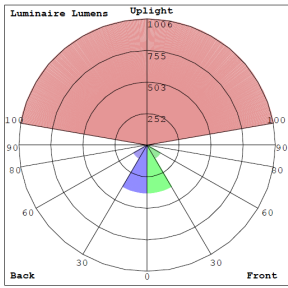

BUG Rating: B1-U5-G0

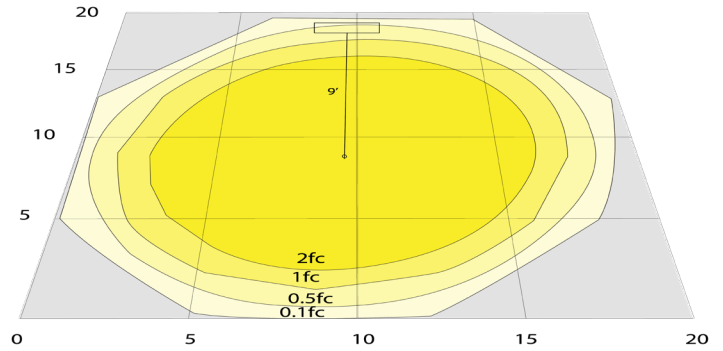

6W 5000K Area 20'x 20' Mounting Height: 9'

## Other Views:

Oil-Rubbed-Bronze Finish:



Side View



Back View



Lens View

Brushed Nickel Finish:



Side View



Back View



Lens View

## Performance Table: WMC2-DL-MCT

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
WMC2-12V-DL-MCT-BN	5W	12V	330LM	3000K/ 4000K/ 5000K	B1-U5-G0	66
WMC2-12V-DL-MCT-ORB	5W	12V	330LM	3000K/ 4000K/ 5000K	B1-U5-G0	66

## Sample Ordering

Model Voltage Light Direction Color Temp. Finish

WMC2 - 12V - DL - MCT -

BN = Brushed Nickel  
ORB = Oil-Rubbed Bronze

## Example:

1. WMC2-DL-MCT-BN-DT (FOR WMC2 5W DOWN LIGHT MCT BRUSHED NICKEL FIXTURE 12V)

