

WMXPRO SERIES LED OUTDOOR LIGHTING

WMXPRO-SM-15-30W-MCTP

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!




Customer Name: _____

Project Name: _____

Note: _____

Type: _____

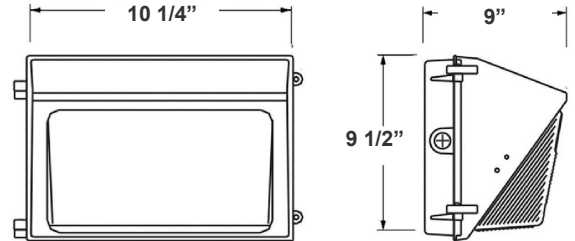

10 1/4"(W) x 9 1/2"(H) x 9"(D)

Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas.

Features

- ADC12 Aluminum Heat Sink, Outdoor Powder Coating
- Connect One End or Both Ends (Dual Function)
- Multi Power & CCT (Switches are inside fixture)
- 7-year warranty
- Prismatic Borosilicate Glass Lens

Technical Specifications

Electrical:

- Input Wattage: 15/20/25/30W
- Input Voltage: 120-277V AC 50/60Hz
- Input current: 0.35A
- Power factor: >0.9
- Efficacy: 130 LPW

Mechanical:

- ADC12 Aluminum Heat Sink, Outdoor Powder Coating
- Lens: Prismatic Borosilicate Glass Lens
- Same Footprint as Traditional HID Wall Packs
- Four 1/2" Hubs: 1 top, 1 on Each Side, 1 Rear
- Mounting: Wall Mounting
- Operating Temperature: -40°F ~ 104°F
- Lifespan: 70000 Hrs.
- IP rating: IP65, Wet Locations

Lighting:

- Dimming: 0-10V Dimming
- Chip: Lumileds LEDs
- Multi Power & CCT (Switches are inside fixture)
- Total Lumens: 4200LM Max.
- Color Temperature: 3000K/4000K/5000K/5700K
- CRI: >70

Applications:

- Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- Replace existing HID wall packs
- Great for use with photocell

Other Models:




• 60W | 8100LM | WMXPRO-MD-20-60W-MCTP • 80W | 11200LM | WMXPRO-MD-20-80W-MCTP • 120W | 16500LM | WMXPRO-LG-50-120W-MCTP



Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com | www.westgatecontrols.co



Photometrics: WMXPRO-SM-15-30W-MCTP

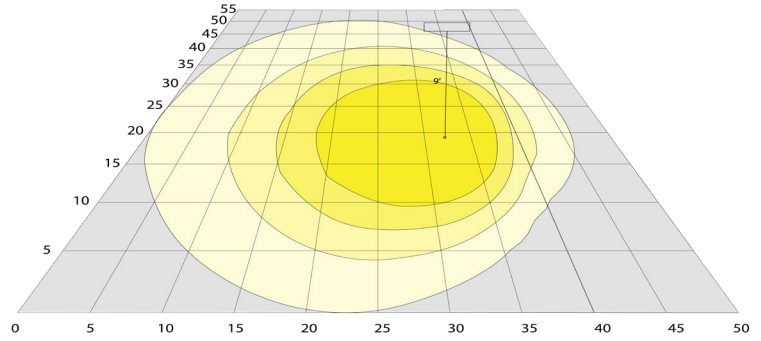

BUG Rating: B1-U3-G2

Area 55'x 50' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: WMXPRO-SM-15-30W-MCTP

| MODEL NO. | Wattage | Voltage | Lumens | Color Temp. | BUG Rating | LPW |
|-----------------------|---------|----------|--------|----------------------------------|------------|-----|
| WMXPRO-SM-15-30W-MCTP | 15W | 120-277V | 1850LM | 3000K 4000K 5000K 5700K | B1-U3-G2 | 130 |
| | | | 1925LM | | | |
| | | | 2000LM | | | |
| | | | 2000LM | | | |
| | | | 2500LM | | | |
| | 20W | | 2600LM | | | |
| | | | 2700LM | | | |
| | | | 2700LM | | | |
| | | | 3250LM | | | |
| | | | 3375LM | | | |
| | 25W | | 3500LM | | | |
| | | | 3500LM | | | |
| | | | 3500LM | | | |
| | | | 3900LM | | | |
| | | | 4050LM | | | |
| 30W | 4200LM | | | | | |
| | 4200LM | | | | | |
| | 4200LM | | | | | |
| | 4200LM | | | | | |
| | 4200LM | | | | | |



Sample Ordering

| Model | Size | Min. Watt | Max. Watt | Watt/Color Temp. |
|--------|------|-----------|-----------|------------------|
| WMXPRO | SM | 15 | 30W | MCTP |

Accessories:

Blank = No Option For Accessories

Factory-Installed Options:

Blank = No Option For Accessories

OPT-EM-OD1EXT= EXTERNAL EMERGENCY BACKUP BATTERY
 OPT-SEN-3MRLV-5= PROGRAMMABLE MICROWAVE (BI-LEVEL FOR 80W & UP)
 OPT-PC-B= BUTTON
 OPT-CLR-85= COLOR PAINT
 WEC-8RC= REMOTE CONTROL
 OPT-TRS-T20= TAMPER RESISTANT SCREW

Example:

1. WMXPRO-SM-15-30W-MCTP

(FOR 30W MAX MCTP FIXTURE 120-277V)

2. WMXPRO-SM-15-30W-MCTP

(FOR 30W MAX MCTP FIXTURE 120-277V)

OPT-EM-OD1EXT

(EXTERNAL EMERGENCY BACKUP BATTERY)

FACTORY-INSTALLED OPTIONS:



OPT-EM-OD1EXT



OPT-PC-B



WEC-8RC



OPT-SEN-3MRLV-5

