

WPC Cut-Off LED Wall Pack



Die-cast Aluminum Housing + PC Lens
 L70 Lifespan: 100,000 hours
 Power Factor: ≥ 0.95
 IP65 for wet location
 Effective Thermal Management

130 LPW


NebuLite
 Lighting with Innovations


7 YEAR WARRANTY


 OPERATING
 -40°F - 122°F



ETL US


CE


UL


RoHS



24

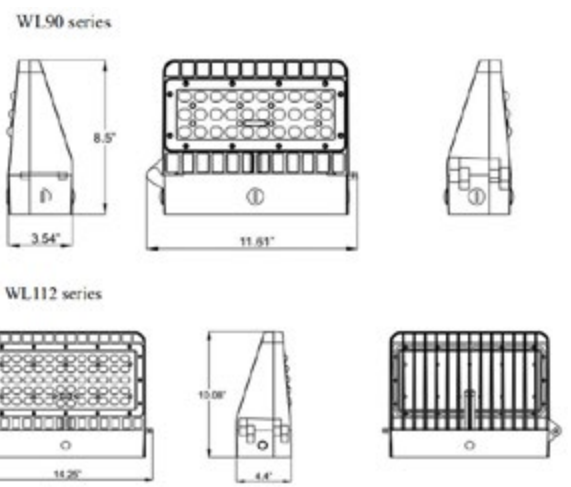


MODEL	WATTAGE	CCT	LUMEN	VOLTAGE	WARRANTY
WPC-20W	20watt	3000K, 4000K, 5000K	2,600lm	100-277vac	7 YEARS
WPC-24W	24watt	3000K, 4000K, 5000K	3,120lm	100-277vac	7 YEARS
WPC-48W	48watt	3000K, 4000K, 5000K	6,240lm	100-277vac	7 YEARS
WPC-80W	80watt	3000K, 4000K, 5000K	10,400lm	100-277vac	7 YEARS
WPC-100W	100watt	3000K, 4000K, 5000K	13,000lm	100-277vac	7 YEARS
WPC-150W	150watt	3000K, 4000K, 5000K	19,500lm	100-277vac	7 YEARS




LIGHTING DISTRIBUTION:




90*120DEG




120DEG




90DEG




85*135DEG




TYPE III (SHORT)



TYPE II



TYPE V



TYPE III (MEDIUM)

UNIQUE FUNNEL HEAT SINK

130 LM/W LUMINOUS EFFICIENCY





140 LM/W SAMSUNG LED CHIPS



HIGH TRANSMITTANCE LENS



SEPARATE POWER SUPPLY BOX AND HEAT SINKER FOR EASY INSTALLATION



DIMENSIONS

JL-403C Dimming Photocell Dusk To Dawn

