

## LED Bollard Light



### PRODUCT FEATURES:

- ❖ Optical design, greatly improved the light utilization and evenness.
- ❖ High efficiency LED Driver, voltage AC120-277V.
- ❖ Cast Aluminum design, better cooling, light quality, LED Tj < 85°C.
- ❖ Excellent efficacy ≥ 130lm/w.

### Additional Information:

- Power: 25W
- Input: AC 120-277V
- CCT : 4000K/5000K
- Light Source: SMD 2835 LEDs
- Driver: WELED POWER





MODEL #	
PROJECT:	
NOTES:	
DATE:	
PREPARED BY:	



### PRODUCT APPLICATIONS:

The LED Bollard Lighting Series can be widely used for Outdoor (Wet Location) Excellent for Lawns, Courtyards, Roadways and many other applications.

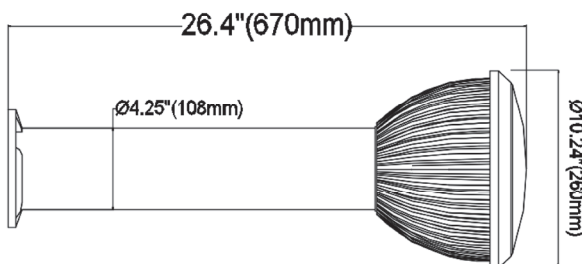

### Structure Features:

- Shell Materials: Aluminum & PC
- Finish: Dark Bronze/White/black(Optional)
- Net Weight: 2.76KG (6.08LBS)
- **Product Size: 670mmX260mmX108mm**  
**26.4"X10.24"X4.25"**
- **Carton Size: 690mmX270mmX270mm**  
**27.2"X10.6"X10.6"**



**WSD LED INC**  
Green Lighting Resources


**25W**

# LED Bollard Light

## TECHNICAL PARAMETERS:

Type	WSD-BL25W27-XXK-Z(D,W,B,S)		
<b>Power</b>	25W	<b>Lighting Angle</b>	141°
<b>Input Voltage</b>	AC120-277V	<b>LED Brightness Decay</b>	<5%/6000 hrs
<b>PF</b>	≥ 0.90	<b>Working Life</b>	>75000 hrs
<b>Driver Efficiency</b>	≥ 87%	<b>Working Temperature</b>	-30 - +45°C
<b>Luminous Flux</b>	3360 Lm	<b>Storage Temperature</b>	-40 - +80°C
<b>Color Temperature</b>	4000K/5000K	<b>Protection Level</b>	Wet Location
<b>CRI</b>	Ra>70	<b>Cable</b>	3core, 18AWG (0.3m)

## PHOTOMETRY:

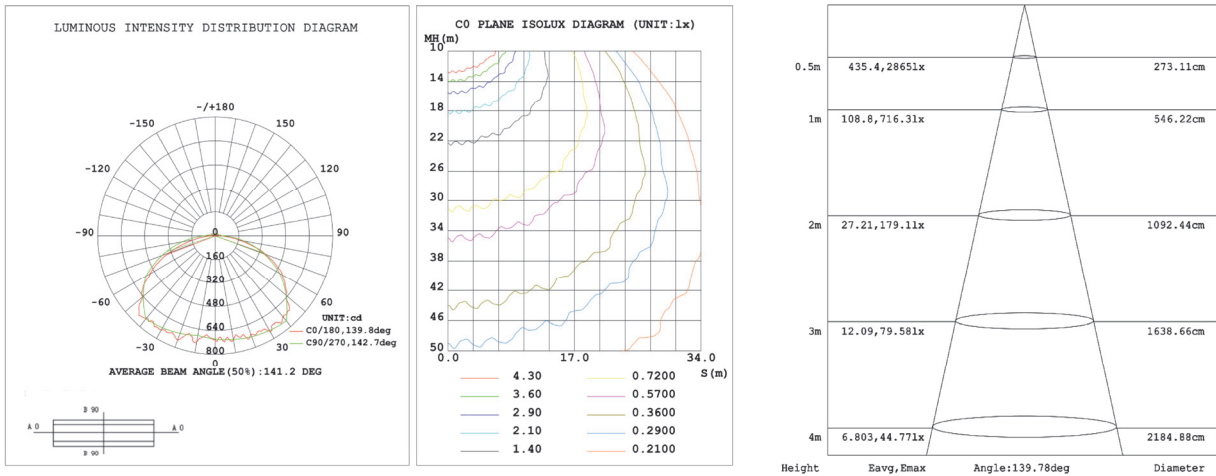

## ORDERING EXAMPLE: WSD-BL25W27-XXK-Z (D, W, B, S)

WSD	BL	25W	27	XXK	Z
Company	Product	Power	Voltage	ColorTemp	FINISH
<b>WSD LED INC</b>	LED Bollard Light	<b>25W(25W)</b>	AC120-277V	<b>40K (4000K)</b> <b>50K (5000K)</b> <b>± 500K</b>	<b>D</b> (Dark Bronze) <b>W</b> (White) <b>B</b> (Black) <b>S</b> (Silvery)