

# LED Mini Wall Pack Series

**Wattages: 10W, 15W, 20W**

LED Mini Wall Pack series can be widely used in indoor or outdoor lighting (wet location). Ideal for mechanical or electronic processing workshops, storage warehouses, steel mills, gas stations, toll booth, waiting rooms, the platforms of railway station, indoor stadiums.



WSD-WP-01W27  
WSD-WP-015W27




INTEGRATED  
PHOTOCELL  
(Standard)

WSD-WP-02W27

## FEATURES

- Lumileds LED, high luminous efficiency and long working life.
- High efficiency LED Driver, the wide range input voltage AC120-277V/AC.
- Excellent optics design, greatly improve the light utilization and evenness.
- Motion sensor control available (Optional)
- 1-10V Dimming.

Die-cast aluminum cooling design, high quality and better cooling for LED  $T_j < 85^\circ\text{C}$ .




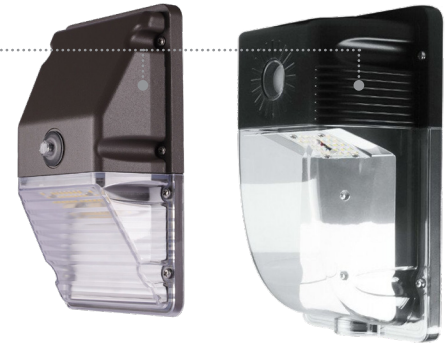


SPECIFICATION			
WATTAGE	WSD-WP01W27-50K	WSD-WP015W27-50K	WSD-WP02W27-50K
LUMEN	1450 lm	2100 lm	2420 lm
EFFICACY	145 lm/W	140 lm/W	121 lm/W
CCT	4000K, 5000K		
CRI	80		
INPUT VOLTAGE	120-277V		
POWER FACTOR	0.95		
DRIVER EFFICACY	88%		
DIMMING	1-10V Dimming		
LIGHT ANGLE	108°		93°
LIFE SPAN	75,000 hrs		
WORKING TEMPERATURE	-22°F ~ 113°F		
STORAGE TEMPERATURE	-40°F ~ 176°F		
OUTDOOR RATING	IP65		
CABLE	Input Connect, No cable		
WARRANTY	5 year limited		

# LED Mini Wall Pack Series

Wattages: 10W, 15W, 20W

## DIMENSION

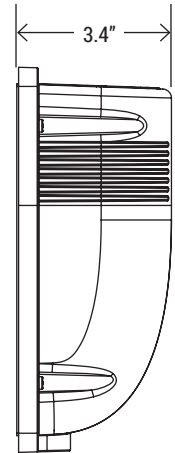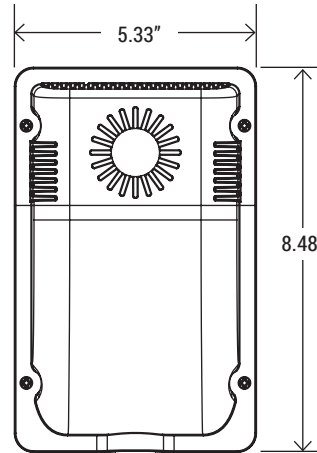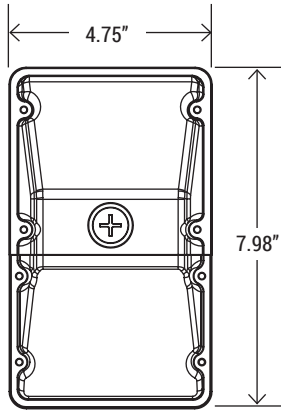

<b>WATTAGE</b>	WSD-WP-01W27 / WSD-WP-015W27
<b>NT. WEIGHT</b>	1.26 lbs
<b>BOX DIM.</b>	21.46" x 9.06" x 10.63" (12 pcs)

<b>WATTAGE</b>	WSD-WP-02W27
<b>NT. WEIGHT</b>	3.3 lbs
<b>BOX DIM.</b>	18.5" x 9.8" x 9.44" (6 pcs)

## ORDERING INFORMATION

EXAMPLE:

**WSD-WP-01W27-50K-D-P**

WSD	WP	01W	27	50K	D	P
COMPANY	PRODUCT	WATTAGE	VOLTAGE	CCT	FINISH	CONTROL
WSD LED INC	WP Mini Wall Pack	01W - (10W) 015W - (15W) 02W - (20W)	27 (AC120-277V)	40K - (4000K) 50K - (5000K)	D - (Dark Bronze) W - (White) B - (Black) S - (Silver)	P - (Photocell)

# LED Mini Wall Pack Series


Wattages: 10W, 15W, 20W

## PHOTOMETRICS

For complete IES files, please visit our website.


### WSD-WP-01W27-50K

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

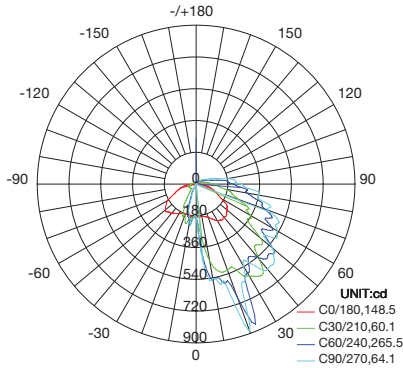


AVERAGE BEAM ANGLE(50%):134.5 DEG

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

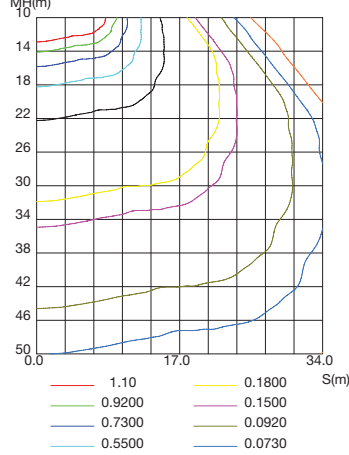


ISOLUX DIAGRAM

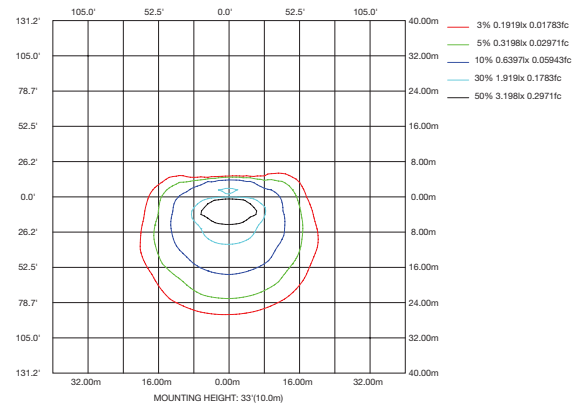


### WSD-WP-015W27-50K

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

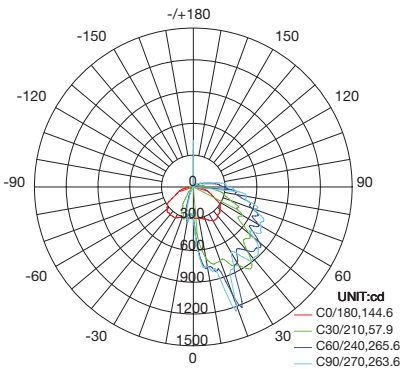


AVERAGE BEAM ANGLE(50%):182.9 DEG

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

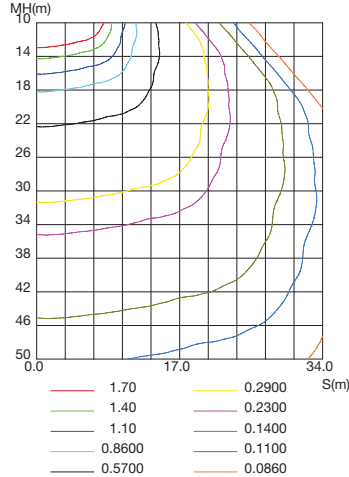


ISOLUX DIAGRAM

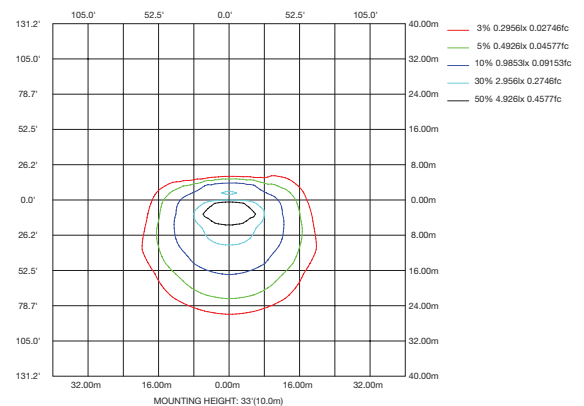


### WSD-WP-02W27-50K

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

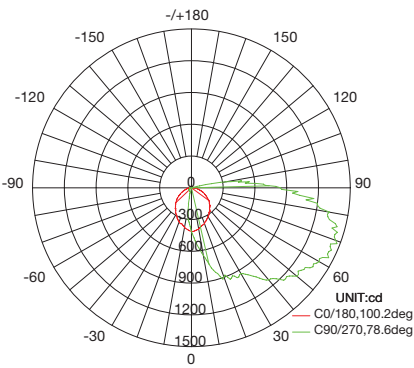

AVERAGE BEAM ANGLE(50%):89.4 DEG

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

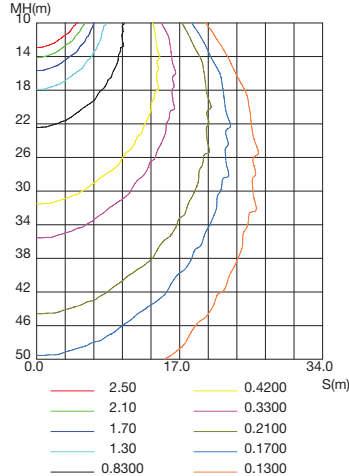

ISOLUX DIAGRAM

