



## Features

- Excellent color rendering (94+ CRI)
- Adjustable CCT from 2700K to 6000K
- Up to 165 lumens per foot performance
- Consumes up to 3.5 watts per foot
- Cuttable every 3.94"
- 22 foot max run
- (IP54) unjacketed or (IP65) jacketed versions
- 50,000 hours rated life

## Available CCT



2700K-6000K  
Tunable CCT

## Control Options

- Trulux Tunable CCT Controls
- Requires LED-DR Driver + Trulux Receiver

## Listing / Ratings





## TRULUX™ Tunable High Output - 12V

Modify any space's look with full-range white light tuning from 2700K to 6000K and maintain excellent color rendering with up to 165Lm per foot. Trulux wall controls, remote controls, or the Trulux App will deliver convenient tuning and dimming for a custom system.

## Technical Information

Series	HTL-TW-12V
Input Voltage	12V
CCT	2700K-6000K Tunable CCT
CRI	94+
Wattage	Up to 3.5W per ft
Lumens	Up to 165Lm per ft
Max Run	22 feet
Cuttable	Every 3.94"
IP Rating	IP54 (unjacketed) / IP65 (jacketed)
Dimmable	5-100%
Rating	cULus Listed
Rated Life	50,000 hrs

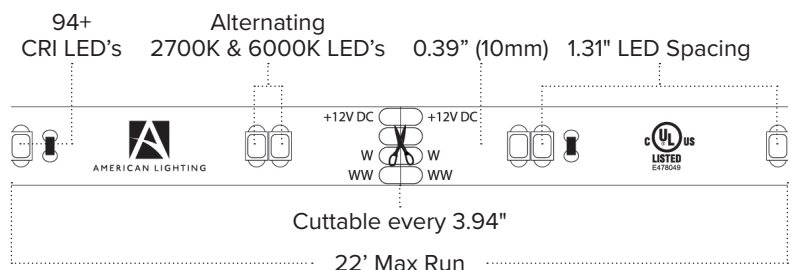



TUNABLE HIGH OUTPUT  
TRULUX TAPE LIGHT

**2700K to 6000K**  
Tunable CCT - 12V DC

up to 3.5W per ft / up to 165Lm per ft

16.4ft Reels



**HTL65-TW-12V** (16.4ft)

Custom Cut



**HTL-TW-12V-CC**

HTL65-TW-12V (IP65) 16.4ft Reels include: (1) Male + (1) Female connectors  
Custom Cut: Please allow up to 2-4 weeks for custom cut order processing and delivery

**Building a Tunable CCT Trulux System?**

See pages (34-35) for compatible Tunable CCT Trulux controllers and accessories

Trulux Tunable CCT Accessories



Power Feed  
Connector Kit  
**TL-4PWR**



**TL-4SPL** Splice Connector  
**TL-4L** (L) Snap connector  
**TL-4T** (T) Snap connector  
**TL-4X** (X) Snap connector



Linking Cables (IP54)  
**TL-4JUMP-5** (6")  
**TL-4JUMP-1** (12")  
**TL-4JUMP-2** (24")

Trulux Tunable CCT Control



Single Zone Push Dial  
Wireless RF Wall Controller  
**TWRF-BATT**



4 Zone Touch Slide  
Wireless RF Wall Controller  
**TWRF-4Z**



Single Zone Table Top  
Wireless Table Top Controller  
**TWRF-BATT-TT**




4 Zone Remote  
Wireless Remote Controller  
**TWRF-3AAA**




Trulux RF Receiver  
Required per zone  
**REC-5A-4Z**

Trulux Tunable CCT Set-up



Push Dial Controller  
(Single zone)



LED-DR 12V Driver  
(30W, 60W, 100W, 150W)



Trulux RF Receiver  
(Required)



Trulux Tape Light

TASK LIGHTING

DOWNLIGHTING

LINEAR LIGHTING

ARCHITECTURAL LIGHTING

POWER SUPPLIES