

Outdoor Cove Lighting
CROWN NARROW



Outdoor Cove Lighting
CROWN NARROW




Outdoor Cove Lighting
CROWN NARROW




- Quick connection
- Narrow beam angle
- Dimmable, 1-10V dimming to 10%-100%
- Linkable, max.linkable length: 72' @120VAC, 156' @277VAC
- IP rating: IP66 (for wet locations)
- Lockable, precision aiming adjustment: ±82.5°vertical rotation
- Lifetime: 50,000hrs (ta=95°F, 35°C)
- Ta: -13°F~122°F (-25°C~50°C)
- Material: Aluminum alloy
- 10W/ft, 1000lm/ft



Dimensions: (inches/mm)

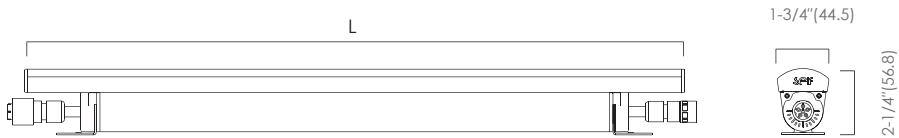

Wiring Diagram

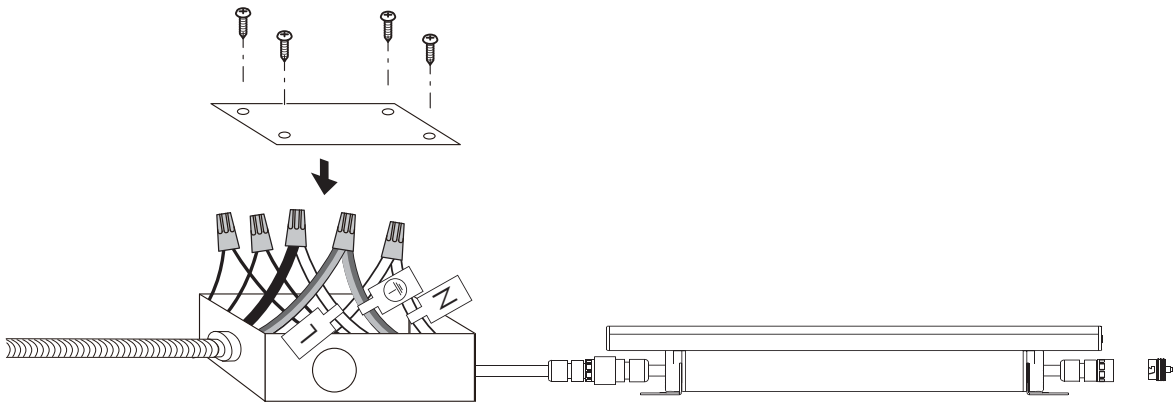


AC connection :

Black: " L "

White: " N "

Yellow/green: " ⊕ "




Dimming connection :

Violet: " + " ———

Gray: " - " ———

Outdoor Cove Lighting
CROWN NARROW

Specialized Candlepower Distribution

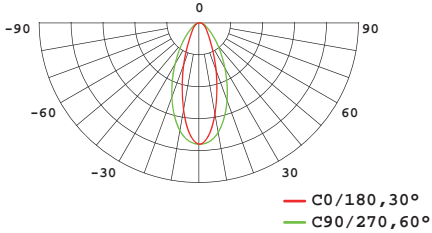

How to order using our catalog numbers:
Example: CROWN NARROW-123060K40SS

Series	Length	Color Temp	Beam Angle	Finish	Installation
CROWN NARROW	12 - 11.8"(300mm) 47 - 47"(1200mm) 70 - 70"(1778mm)	30K - 3000K 40K - 4000K	3060 - 30°×60°	S - Silver	S - Screw Mounting

Catalog No.	Model	Description				
		Rated Input	Ra	Wattage	Luminous Flux (TYP@4000K)	Included
CROWN NARROW-1230K3060SS	CROWN NARROW-L12-277V	120-277VAC	85	10W	1000lm	1 pc LED fixture 2pcs Screws 1pc End cap
CROWN NARROW-1240K3060SS						
CROWN NARROW-4730K3060SS	CROWN NARROW-L45-277V	120-277VAC	85	40W	4000 lm	
CROWN NARROW-4740K3060SS						
CROWN NARROW-7030K3060SS	CROWN NARROW-L72-277V	120-277VAC	85	60W	6000 lm	
CROWN NARROW-7040K3060SS						

How to choose your driver & cables:


Catalog No.	Description	Photo
IC-CROWN-59	Input cable 59"	

Optional:


Catalog No.	Description	Photo
SC-CROWN-12	Soft connector 12"	
TK-CROWN-79	Track 79", including 3pcs screws	

Outdoor Cove Lighting
CROWN NARROW

Installation Screws installation

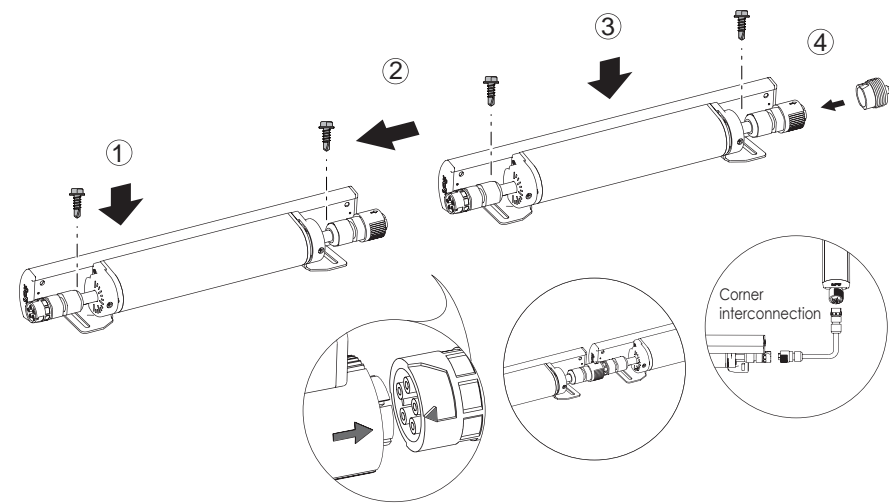

Track installation 1

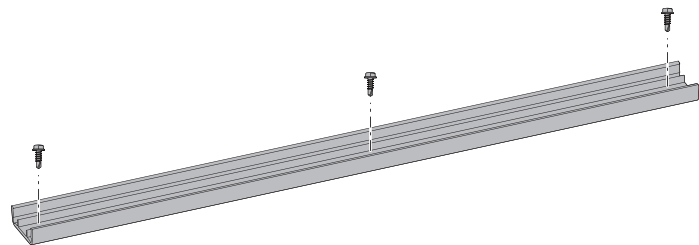

2

