

Battery-operated Lighting MAGIC



Battery-operated Lighting MAGIC




Highlights:

- Linear lighting design for smooth illuminance
- LEDs pixel free
- Auto power off after 30mins
- Easy installation option
- Dimmable switch, circulation: OFF-50%-100%
- Battery powered, low power consumption
- Battery life: approx. 3 months (1 time/day, 5 mins/time)
- Lifetime: 50,000hrs (ta=95°F, 35°C)
- Ta: 32°F~95°F (0°C~35°C)



Dimensions: (inches/mm)

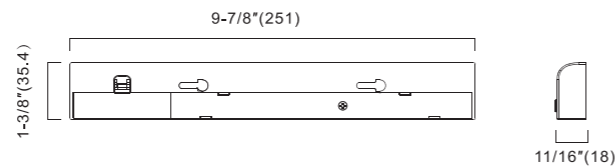

How to order (using our catalog numbers): (Example: MAGIC-1030K140WSM)

| Series | Length | Color Temp | Beam Angle | Finish | Installation |
|--------|------------------|-------------|------------|-----------|--------------------|
| MAGIC | 10 - 9.9"(251mm) | 30K - 3000K | 140 - 140° | W - White | SM-Surface Mouting |

| Catalog No. | Model | Description | | | |
|-------------------|--------------|-------------|----|---------------|---|
| | | Rated Input | Ra | Luminous Flux | Include |
| MAGIC-1030K140WSM | MAGIC-L21-12 | 3*LR6 AA | 85 | 84lm* | 1pc LED fixture 3pcs LR6 AA batteries 3pcs Double-sided adhesive tapes 1pc Mounting template sheet 2pcs Mounting screws |

*Primary 100% output luminous flux with new batteries


Vertical & Horizontal Beamwidth

| Vertical & Horizontal Beamwidth | | Center Beam FC |
|---------------------------------|-----------|----------------|
| | | MAGIC-L21-12 |
| | | 3000K |
| 12" | 34-1/4" | 21 |
| 18" | 51-7/16" | 9 |
| 24" | 68-9/16" | 5 |
| 30" | 85-11/16" | 3 |
| H | D | 84lm |

Battery-operated Lighting MAGIC

Installation:

Double-sided adhesive tape installation

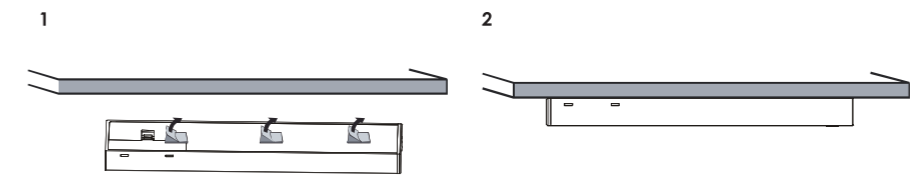

Mounting template sheet installation

