

SPIRIT PANEL 1X4 LED

Architectural Indoor



| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |




FEATURES

- 0-10V Dimmable
- 120 Degree Beam Angle
- 5 Year Warranty
- Aluminum Frame In White Finish, Steel Die-Formed Back Enclosure
- cULus Listed Damp Location For Ceiling Mount
- DLC Approved
- IC Rated For Insulated Ceilings
- Integral Earthquake Clips for Secure Attachment
- LED Backlit Flat Panel
- Linear Driver Integrated Into Side of Panel
- Operating Temp Range -20 Degrees C to 35 Degrees C
- PMMA Lenses Over LEDs, PS Diffuser
- Remote Battery Available
- RoHS, FCC
- Surface Mount and Suspension Mount Cable Kit Accessories Available
- Weight: 4.63 lbs

LINE DRAWING

LINE DRAWING NOT TO SCALE

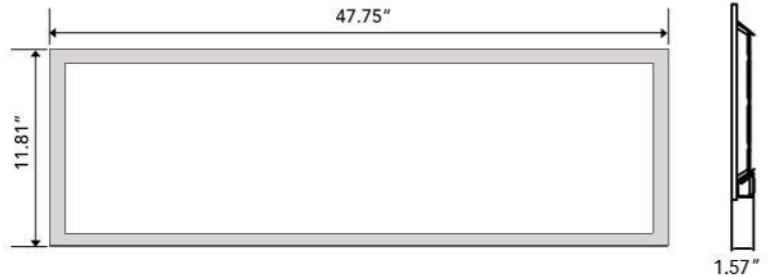

FINISHES

Matte White



SPIRIT PANEL 1X4 LED

Architectural Indoor



Fixture Core

| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |

| PRODUCT CODE | SOURCE/WATTAGE | VOLTAGE | DIMMING DRIVER |
|-------------------------------|---|-------------|----------------|
| FPE1X4-P - Flat Panel 1' X 4' | L30.0-ZE - 30.0W @ 0-10V Dimming Driver | 120V - 277V | 0-10V Dimming |
| ORDER INFO | | | |
| FPE1X4 Example ^ | L30.0-ZE | 120-277V | |

Aesthetics & Options

| TRIM | FINISH | COLOR TEMP | OPTIONS |
|-----------------------------|-----------------------------|--|--|
| Not Applicable | MW - Matte White (Standard) | 35K - 3500K Color Temp. 40K - 4000K Color Temp. | RB - Remote Battery SRK - Surface Mounting Kit SUK - Suspension Mounting Kit |
| ORDER INFO | | | |
| Not Applicable Example ^ | MW | 35K | |

| PROD | SOURCE | 35K SPECS | 40K SPECS | | | |
|--------|--------|--|--|--|--|--|
| FPE1X4 | L30.0 | <ul style="list-style-type: none"> 35K - 3500K Color Temp 3750 LED Delivered Lumens 125 Lumens Per Watt 80 CRI | <ul style="list-style-type: none"> 40K - 4000K Color Temp 3825 LED Delivered Lumens 127.5 Lumens Per Watt 80 CRI | | | |

| REPLACEMENT PART | PART NO | NOTES |
|------------------|---------|-------|
| | | |



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM

We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.