


# SPIRIT PANEL 2X2 LED

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

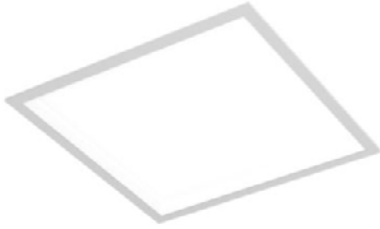


## FEATURES

- 0-10V Dimmable
- 120 Degree Beam Angle
- 5 Year Warranty
- Aluminum Frame In White Finish, Steel Die-Formed Back Enclosure
- cULus Listed Damp Location For Ceiling Mount
- DLC Approved
- IC Rated For Insulated Ceilings
- Integral Earthquake Clips for Secure Attachment
- LED Backlit Flat Panel
- Linear Driver Integrated Into Side of Panel
- Operating Temp Range -20 Degrees C to 35 Degrees C
- PMMA Lenses Over LEDs, PS Diffuser
- Remote Battery Available
- RoHS, FCC
- Surface Mount and Suspension Mount Cable Kit Accessories Available
- Weight: 4.41 lbs

## LINE DRAWING

LINE DRAWING NOT TO SCALE

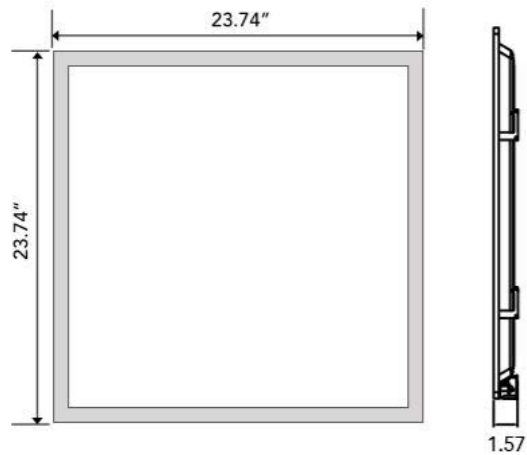

## FINISHES

Matte White



# SPIRIT PANEL 2X2 LED

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
FPE2X2-P - Flat Panel 2' x 2'	L30.0-ZE - 30.0W 0-10V Dimming Driver L36.0-ZE - 36.0W 0-10V Dimming Driver	120 - 277V	0-10V Dimming
ORDER INFO			
FPE2X2 Example ^	L30.0-ZE	120-277V	

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	MW - Matte White (Standard)	35K - 3500K Color Temp. 40K - 4000K Color Temp. 50K - 5000K Color Temp.	RB - Remote Battery SRK - Surface Mounting Kit SUK - Suspension Mounting Kit
ORDER INFO			
Not Applicable Example ^	MW	35K	

PROD	SOURCE	35K SPECS	40K SPECS	50K SPECS
FPE2X2	L30.0	<ul style="list-style-type: none"> <li>35K - 3500K Color Temp</li> <li>3750 LED Delivered Lumens</li> <li>125 Lumens Per Watt</li> <li>80 CRI</li> </ul>	<ul style="list-style-type: none"> <li>40K - 4000K Color Temp</li> <li>3825 LED Delivered Lumens</li> <li>127.5 Lumens Per Watt</li> <li>80 CRI</li> </ul>	<ul style="list-style-type: none"> <li>50K - 5000K Color Temp</li> <li>3900 LED Delivered Lumens</li> <li>130 Lumens Per Watt</li> <li>80 CRI</li> </ul>
	L36.0	<ul style="list-style-type: none"> <li>35K - 3500K Color Temp</li> <li>4500 LED Delivered Lumens</li> <li>125 Lumens Per Watt</li> <li>80 CRI</li> </ul>	<ul style="list-style-type: none"> <li>40K - 4000K Color Temp</li> <li>4590 LED Delivered Lumens</li> <li>127.5 Lumens Per Watt</li> <li>80 CRI</li> </ul>	<ul style="list-style-type: none"> <li>50K - 5000K Color Temp</li> <li>4680 LED Delivered Lumens</li> <li>130 Lumens Per Watt</li> <li>80 CRI</li> </ul>

REPLACEMENT PART	PART NO	NOTES



TERONLIGHTING.COM  
 33 DONALD DR, FAIRFIELD, OH 45014  
 P: 513.858.6004 F: 513.858.6038  
 E: SALES@TERONLIGHT.COM

We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.