

Puck Lighting  
VENUS



Puck Lighting  
VENUS



# Puck Lighting


## VENUS




- Super thin recessed light requiring only minimal space
- Only 1.65W power consumption
- To replace 10W halogen lamp
- Color temperature can be shifted to 3000K, 4000K and 5000K by switch on the back
- Lifetime: 50,000 hours (ta= 77°F, 25°C)
- Ta: -4°F-95°F (-20°C-35°C)
- Material: Aluminum alloy



Dimensions: (inches/mm)

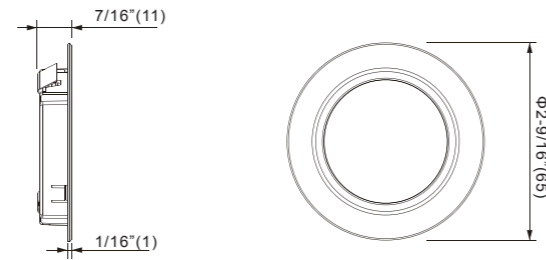

Wiring Diagram

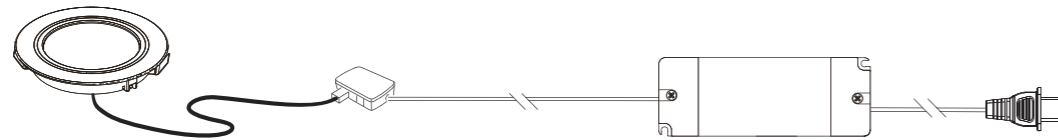

How to order using our catalog numbers:  
Example: VENUS-3110SRS

Series	Diameter	Beam Angle	Finish	Installation
VENUS	3 - 2.6"(65mm)	110 - 110°	S - Silver	RS- Recessed/Surface

Catalog No.	Model	Description					Max. Pcs Per LED Power Supply 40W (NA159-4024TLA-12A6)
		Rated Input	Ra	Wattage	Luminous Flux (TYP@4000K)	Included	
VENUS-3110SRS	VENUS-R14-24V	24VDC	85	1.65W	123lm	1pc LED fixture	12 pcs

# Puck Lighting

## VENUS

Optional:

Catalog No.	Description	Photo
MT-VENUS	Round trim ring for surface mount	

How to choose your driver & cables:

Catalog No.	Description	Photo
NA159-3024FA-12A6	Model: SLT30-24VF-A Input: 100-120VAC NA plug 1 + 59" cable. Output: 24VDC 12-way splitter JB-12A + 6" cable.	

\*Note: For alternative driver configurations, please contact our sales department.


Vertical & Horizontal Beamwidth

Center Beam FC

110°		3000K	4000K	5000K
12"	33-14/16"	42	42	44
18"	50-6/16"	19	19	20
24"	67-5/16"	10	10	11
30"	84-4/16"	7	7	7
H	D	112 lm	123 lm	120 lm

Installation

Recessed installation

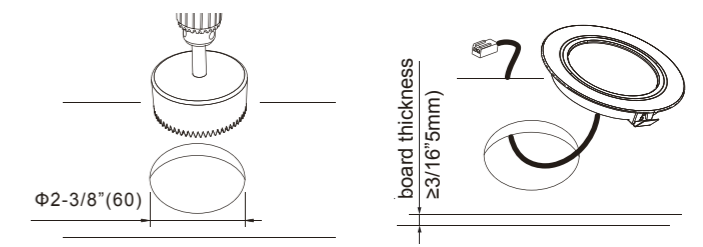

Surface mounting installation

